


# MPF PRODUCTS INC.

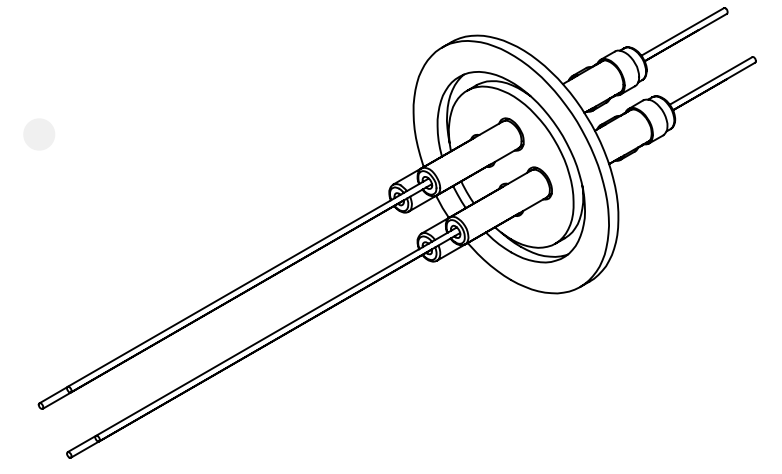

PART #	CONDUCTOR MATERIAL	Ø "A" DIM	CURRENT RATING
A0506-1-QF	NICKEL 200	.092	15 AMPS
A0506-2-QF	OFHC COPPER	.094	50 AMPS
A0506-5-QF	304 STN STL	.094	3 AMPS

**NOTE:**

1. VOLTAGE: 14,000 VOLTS DC
2. CURRENT: SEE TABLE
3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 14 KV, 4 Pins, 2.16" QF/KF, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A		
DIMENSIONS ARE IN INCHES		NAME	DATE	<b>MPF PRODUCTS INC.</b> TITLE: POWER FEEDTHROUGH, 14 KV, 4 PINS, 2.16" QF/KF		
TOLERANCES:		DRAWN	WJ			9/11/2015
ANGULAR: MACH ± 1/2°		CHECKED				9/11/2015
TWO PLACE DECIMAL ± .030		ENG APPR.	WJ			9/11/2015
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		APPLICATION NEXT ASSY      USED ON		
MATERIAL						
FINISH		SURFACE FINISH: 63/ OR BETTER				
PLATING		UNLESS OTHERWISE SPECIFIED:		DWG. NO.      REV A0506		
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Thursday, January 17, 2019 12:03:57 PM DOWNLOADED FROM MPFPI.COM		