
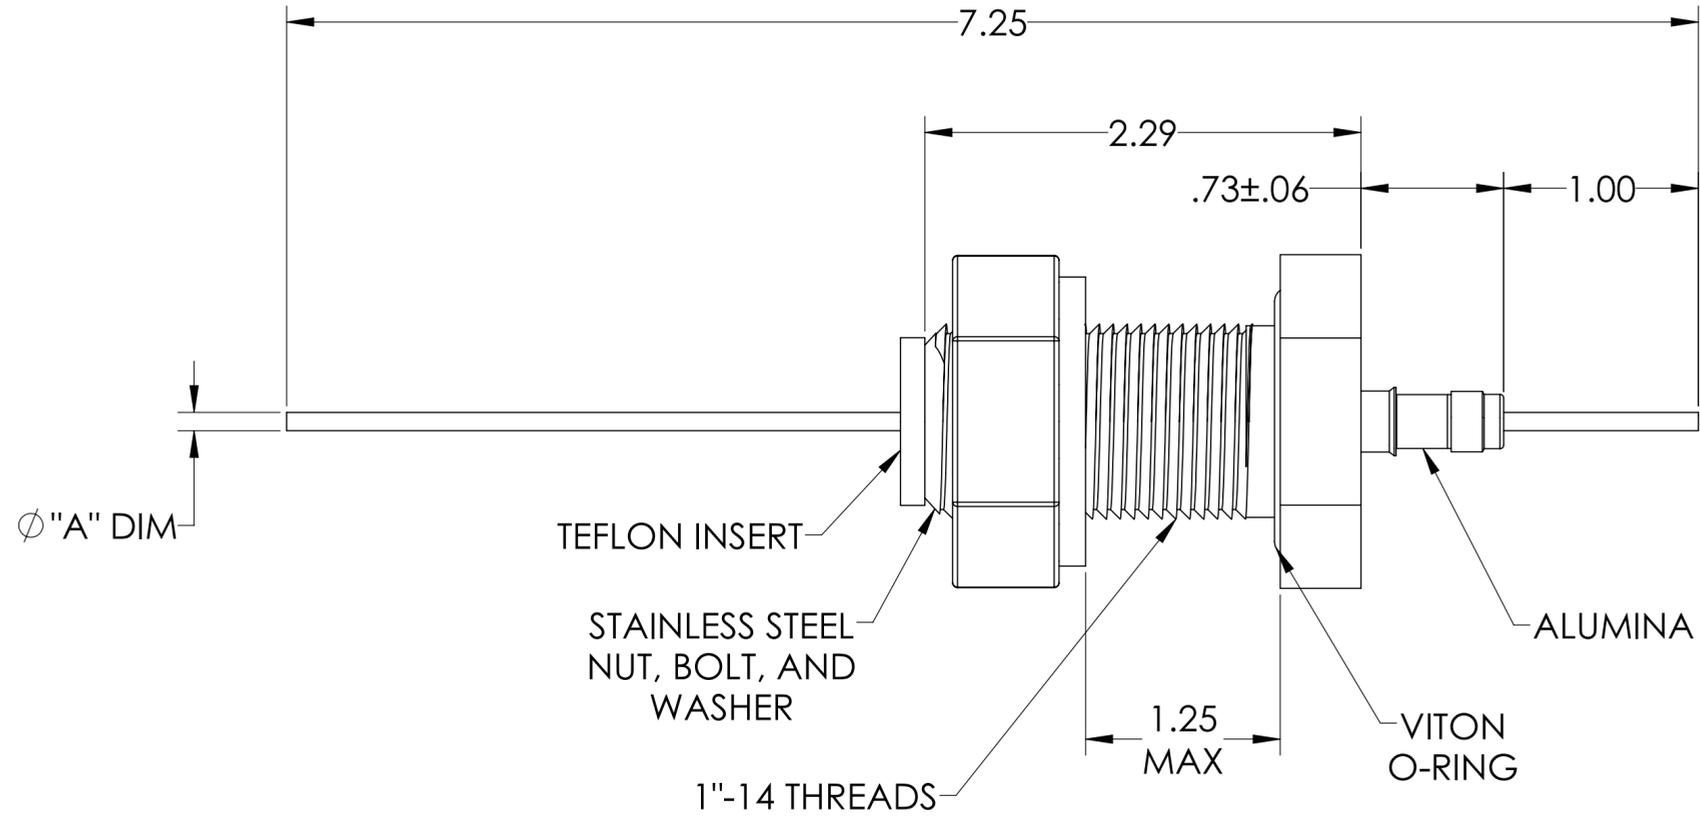
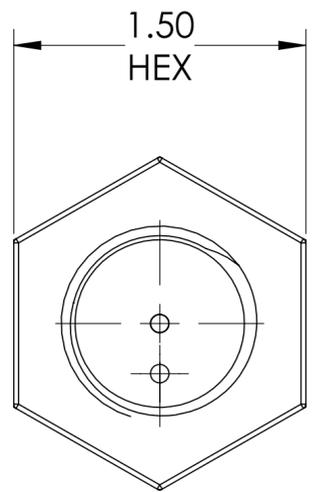


# MPF PRODUCTS INC.

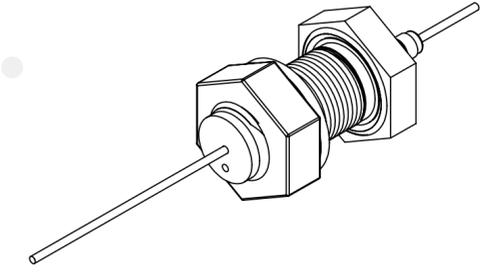

PART #	CONDUCTOR MATERIAL	"A" DIM	CURRENT RATING
A0525-1-BP	OFHC COPPER	.094	50 AMPS
A0525-2-BP	NICKEL	.092	15 AMPS
A0525-3-BP	STN STL	.094	3 AMPS

- NOTE:
- VOLTAGE: 2,000 VOLTS DC
  - CURRENT: SEE TABLE
  - TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 2000 Volts, 1 Pins, 1" Baseplate Bolt, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A		
DIMENSIONS ARE IN INCHES		NAME	DATE	MPF PRODUCTS INC.		
TOLERANCES:		DRAWN	WJ			9/11/2015
ANGULAR: MACH ± 1/2°		CHECKED				9/11/2015
TWO PLACE DECIMAL ± .030		ENG APPR.	WJ			9/11/2015
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		POWER FEEDTHROUGH, 2000 VOLTS, 1 PIN, 1" BASEPLATE		
MATERIAL						
FINISH		APPLICATION				
PLATING		NEXT ASSY	USED ON	DOWNLOADED FROM MPFPI.COM		
SURFACE FINISH:		63/ OR BETTER		DWG. NO.	REV	
UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005.		A0525		
REMOVE ALL BURRS AND SHARP EDGES		Tuesdays, January 22, 2019 10:43:36 AM				