
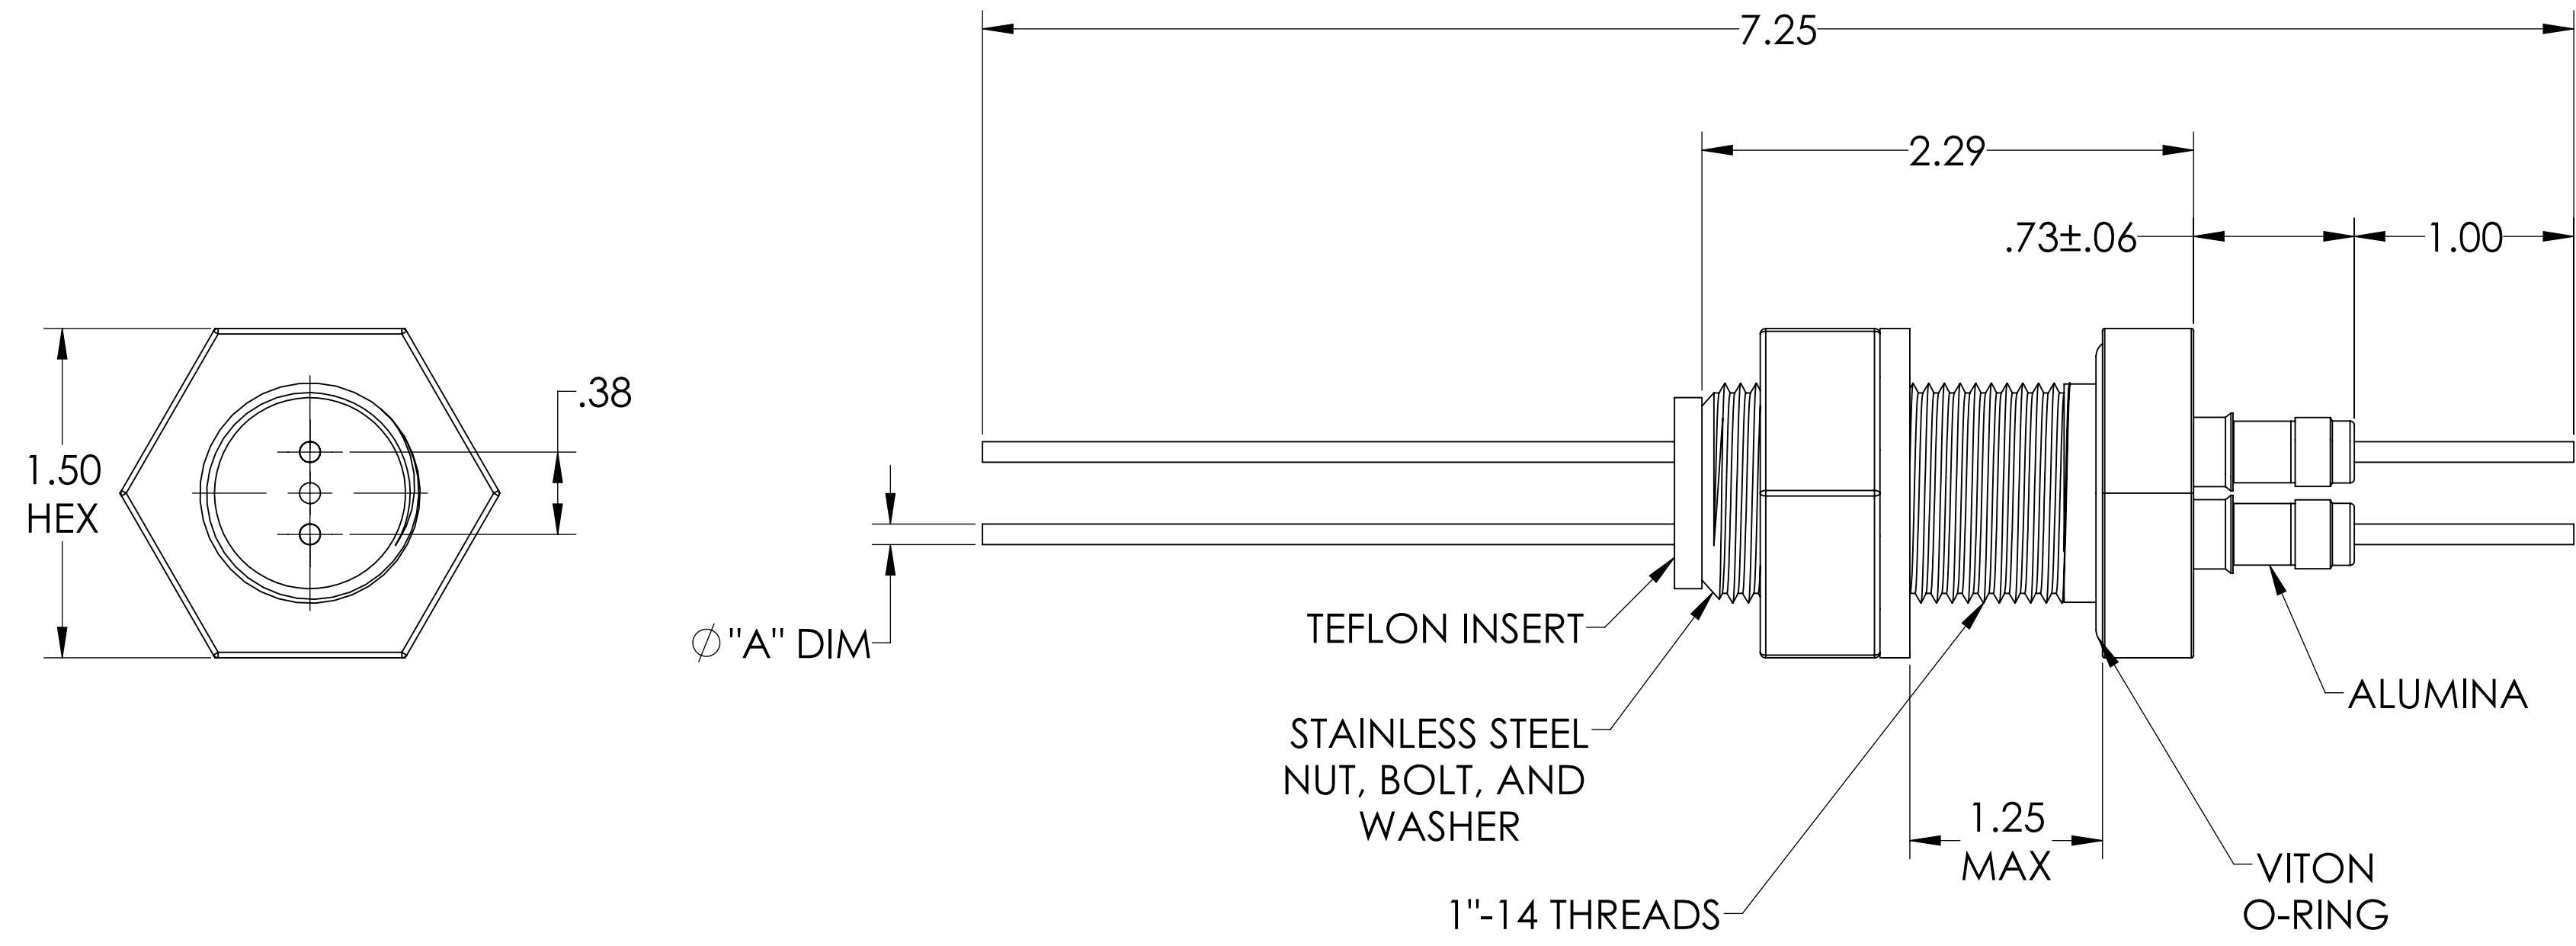


# MPF PRODUCTS INC.

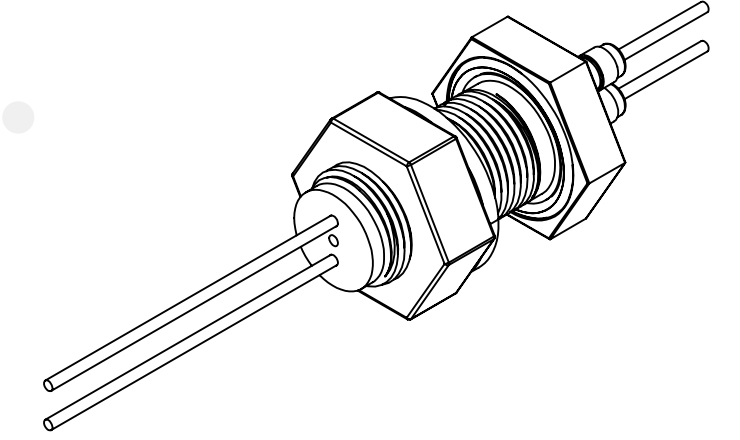

PART #	CONDUCTOR MATERIAL	"A" DIM	CURRENT RATING
A0526-1-BP	OFHC COPPER	.094	50 AMPS
A0526-2-BP	NICKEL	.092	15 AMPS
A0526-3-BP	STN STL	.094	3 AMPS

- NOTE:
1. VOLTAGE: 2,000 VOLTS DC
  2. CURRENT: SEE TABLE
  3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 2000 Volts, 2 Pins, 1" Baseplate Bolt, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		POWER FEEDTHROUGH, 2000 VOLTS, 2 PINS, 1" BASEPLATE	
FINISH		APPLICATION			
PLATING		NEXT ASSY USED ON			
SURFACE FINISH: 63/ OR BETTER		SURFACE FINISH: 63/ OR BETTER			
UNLESS OTHERWISE SPECIFIED:		UNLESS OTHERWISE SPECIFIED:		DWG. NO. A0526	
ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV	
				DOWNLOADED FROM MPFPI.COM	
				Tuesday, January 22, 2019 10:43:12 AM	