
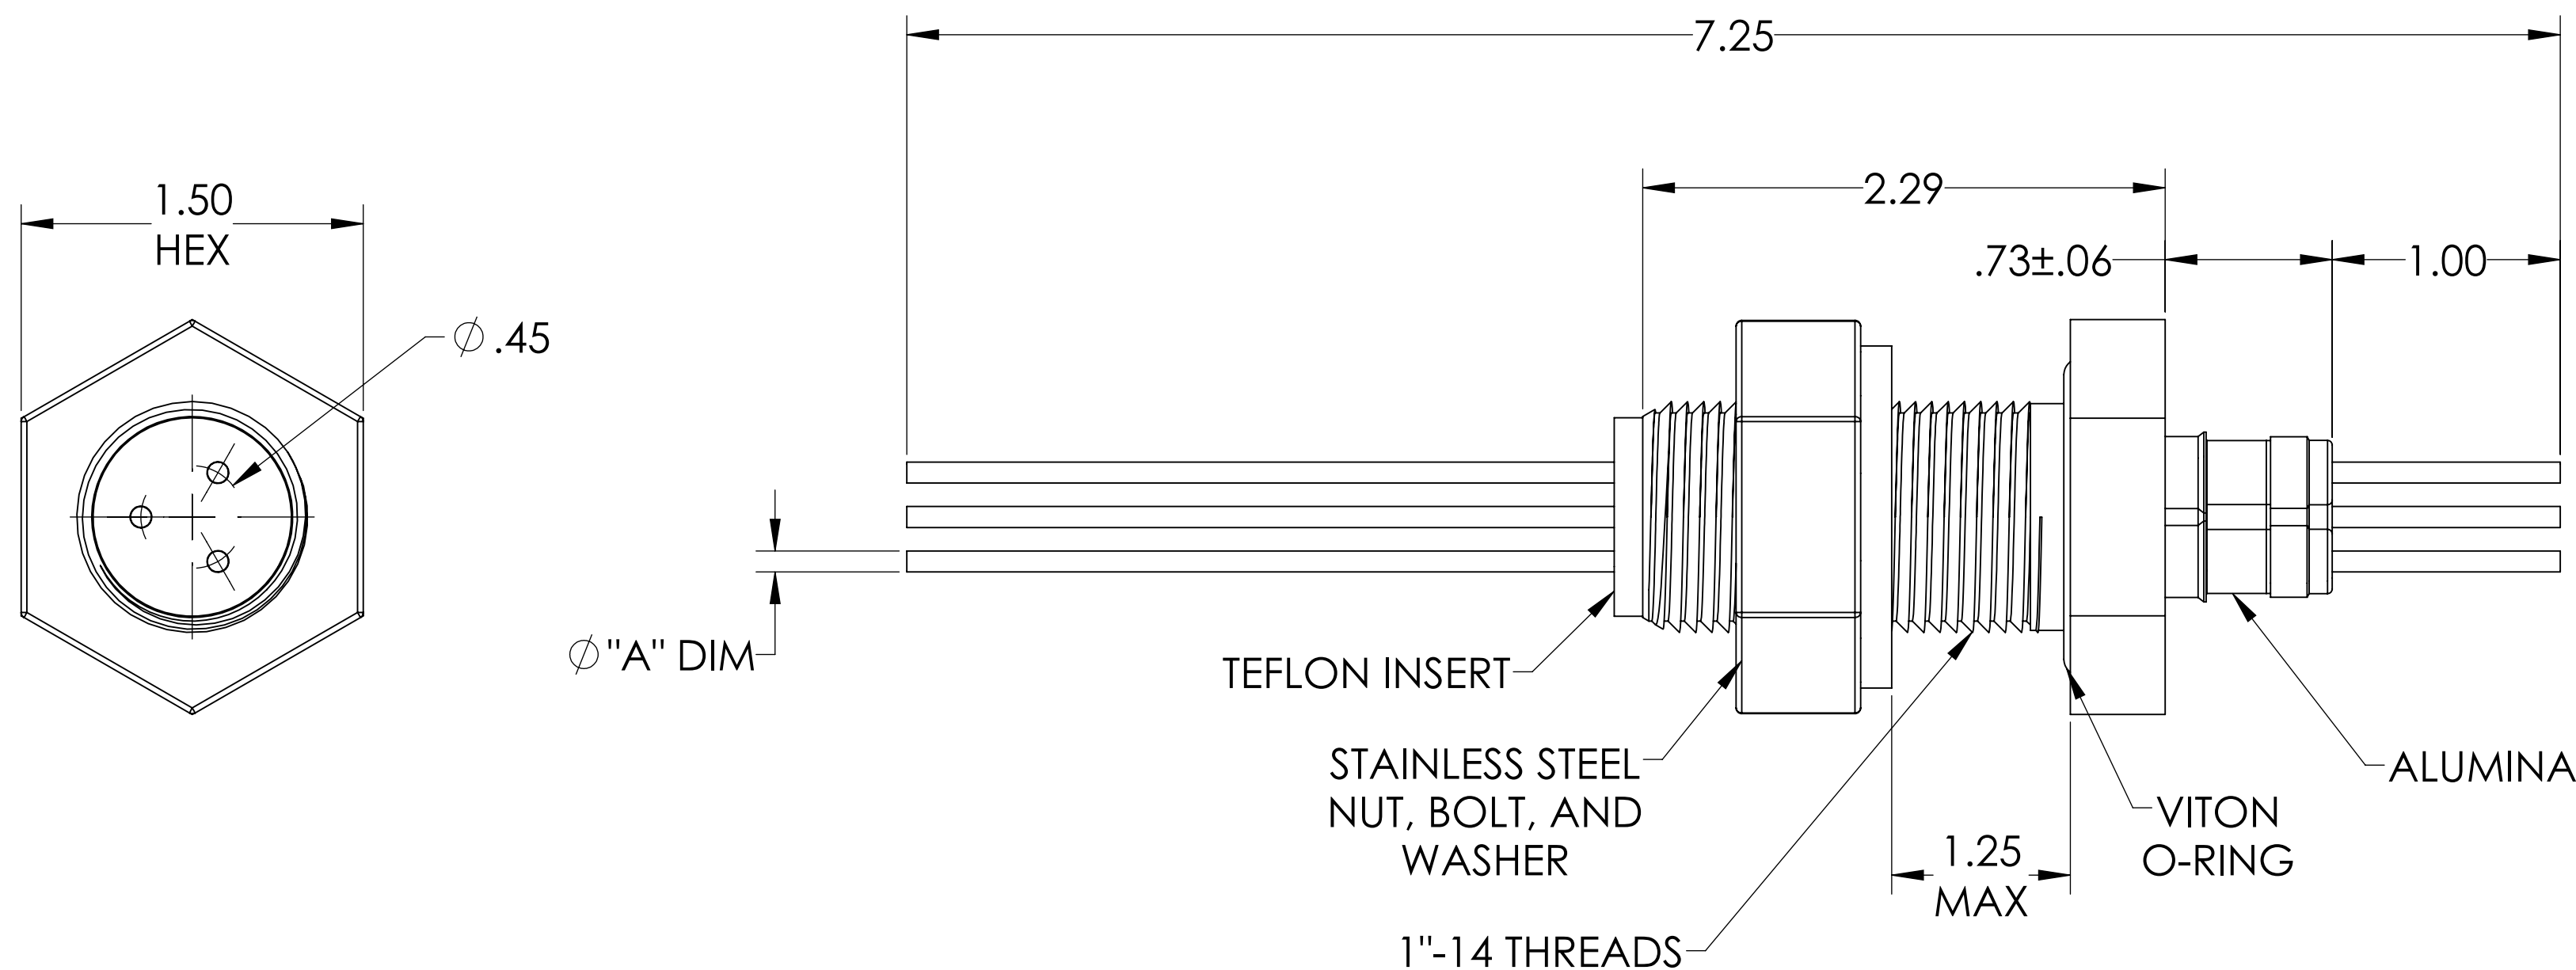


MPF PRODUCTS INC.

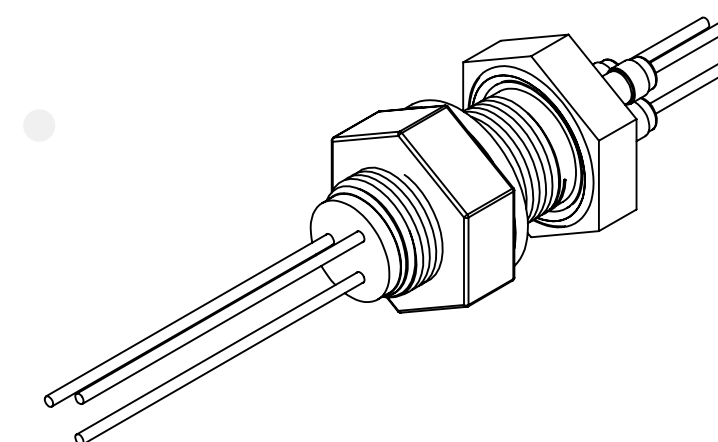

PART #	CONDUCTOR MATERIAL	"A" DIM	CURRENT RATING
A0527-1-BP	OFHC COPPER	.094	50 AMPS
A0527-2-BP	NICKEL	.092	15 AMPS
A0527-3-BP	STN STL	.094	3 AMPS

NOTE:

1. VOLTAGE: 2,000 VOLTS DC
2. CURRENT: SEE TABLE
3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 2000 Volts, 3 Pins, 1" Baseplate Bolt, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		POWER FEEDTHROUGH, 2000 VOLTS, 3 PINS, 1" BASEPLATE	
FINISH		APPLICATION			
PLATING		NEXT ASSY USED ON			
		SURFACE FINISH: 63 OR BETTER			
		UNLESS OTHERWISE SPECIFIED:		DOWNLOADED FROM MPFPI.COM	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		DWG. NO. A0527	
				REV	
				Tuesday, January 22, 2019 10:42:47 AM	