
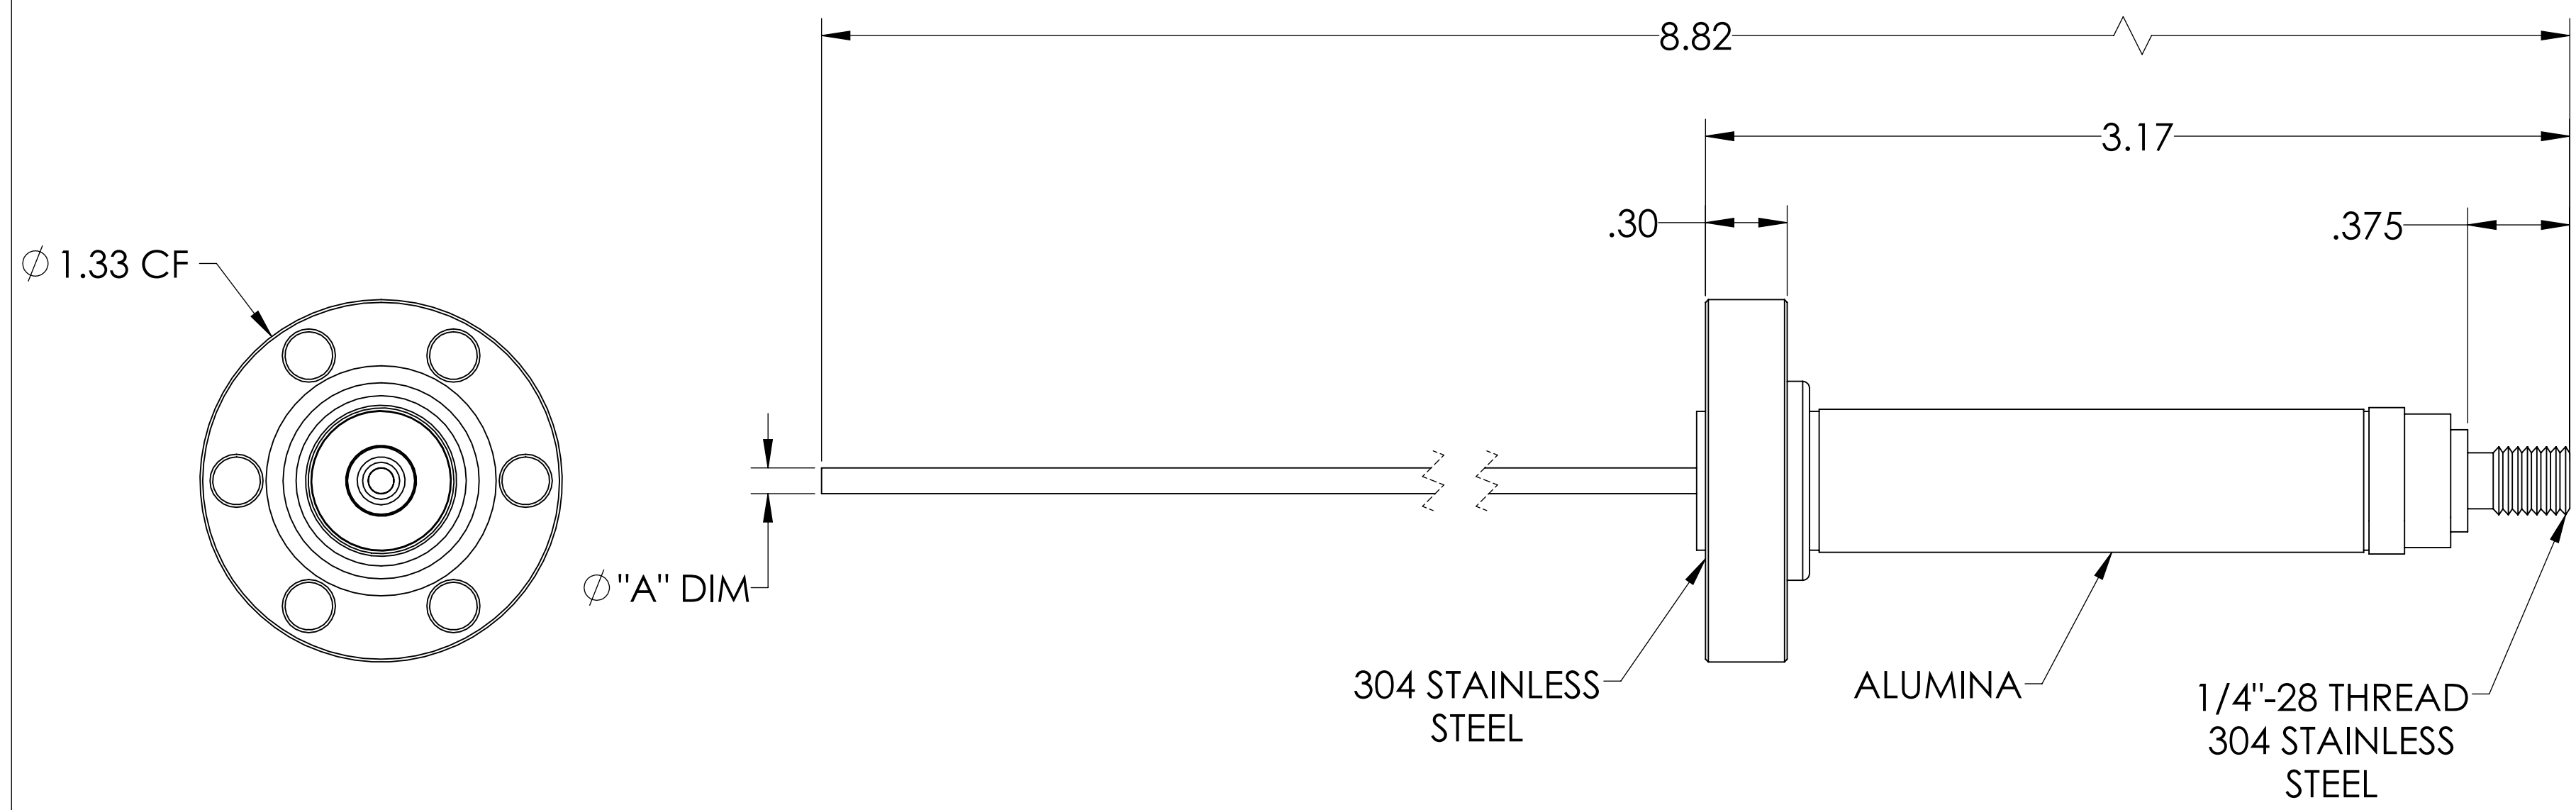


# MPF PRODUCTS INC.

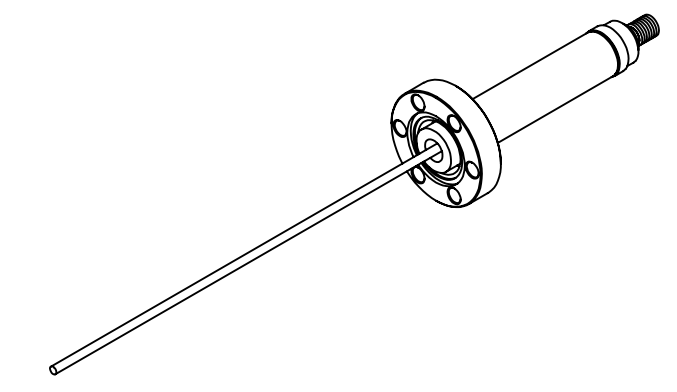

PART #	Ø "A" DIM	CONDUCTOR MATERIAL	CURRENT RATING
A0533-1-CF	.092	NICKEL 200	15 AMPS
A0533-2-CF	.094	OFHC COPPER	50 AMPS

- NOTE:
1. VOLTAGE: 20,000 VOLTS DC
  2. CURRENT: SEE TABLE
  3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 20 KV, 1 Pin, 1.33" Conflat Flange, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	<b>MPF PRODUCTS INC.</b> TITLE: <b>POWER FEEDTHROUGH,                  20 KV, 1 PIN, 1.33"                  CONFLAT FLANGE</b>	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		DOWNLOAD FROM MPFPI.COM DWG. NO.	
FINISH					
PLATING		APPLICATION: NEXT ASSY      USED ON			
SURFACE FINISH:		63 OR BETTER		A0533      REV	
UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Tuesday, January 22, 2019 10:37:57 AM	