
MPF PRODUCTS INC

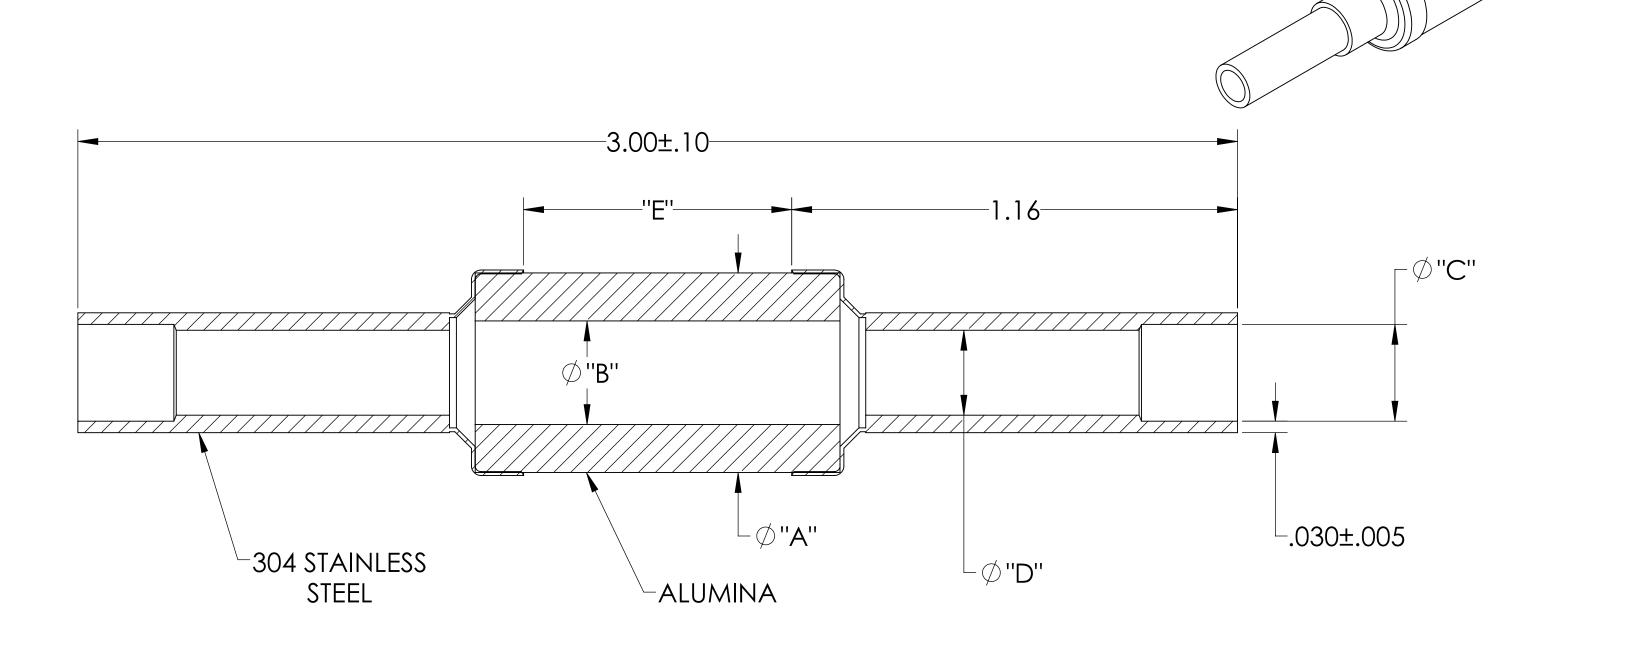

PART #	Ø"A"	Ø''B''	Ø"C"+.002/000	"D"	"E" ± .030
A0573-1-W	.51	.27	252	.22	.67
A0573-2-W	.75	.44	.377	.35	.67

SPECIFICATIONS:

1. VOLTAGE: 10KV

2. TEMPERATURE: -200°C TO 450°C3. LEAK RATE < 1X10-9 ATM CC/SEC HE

Break, 10KV Isolation, Stainless Steel Tube Adapters, High Voltage Isolation, Thermal Isolation, Weldable Tube Ends, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTA	TION		/A		
DIMENSIONS ARE IN INCHES		NAME		-		
TOLERANCES:	DRAWN	WJ	9/11/2015	MPF PR	ODUCTS I	NC.
ANIGURAD AAA GU . 170°	CHECKED		9/11/2015	TITLE:		
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030	ENG APPR.	WJ	9/11/2015			
THREE PLACE DECIMAL ± .015	THIRD ANGLE:		BREAK, 10KV			
MATERIAL			ISOLATION, STAINLESS STEEL TUBE ADAPTERS			
	APPLICATION NEXT ASSY USED ON		JILLE 10		IV.J	
				DOWNLOADED	FROM MPFPI.CC	M
FINISH	SURFACE FINIS	SH:	OR BETTER	DWG. NO.		REV
PLATING	UNLESS OTHERWISE SPECIFIED:		A0573			
PLATING	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Wednesday, March 31, 2021 11:22:17 AM			