

MPF PRODUCTS INC



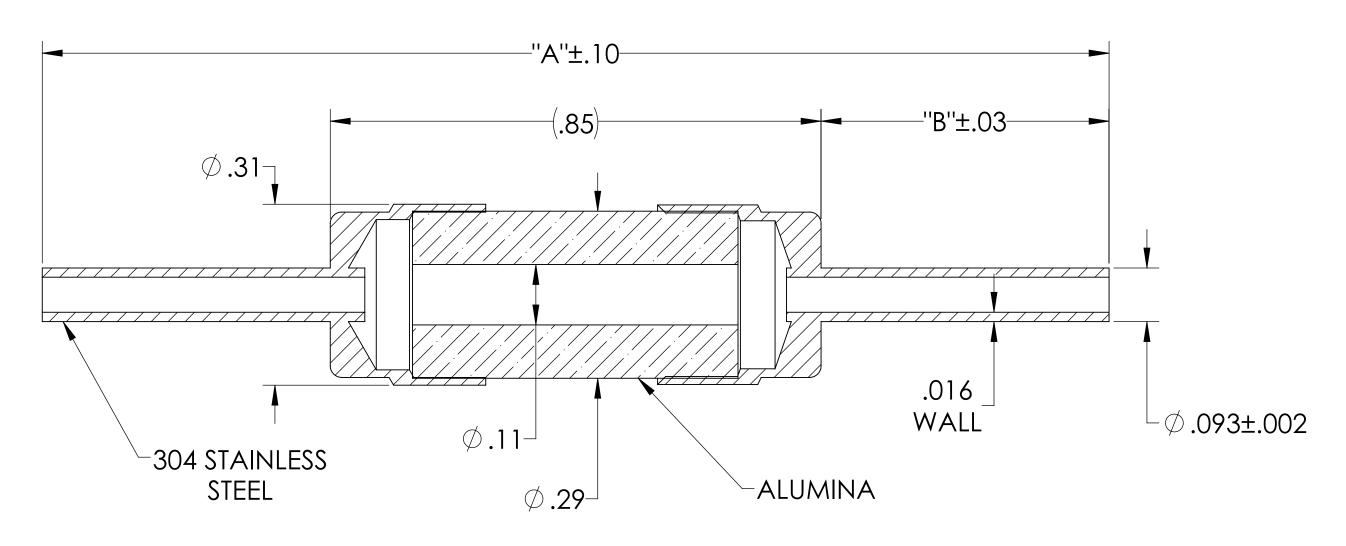

PART #	"A"±.10	"B"±.03
A0574-1-W	1.80	.475
A0574-2-W	2.30	.725

SPECIFICATIONS:

1. VOLTAGE: 5KV

2. TEMPERATURE: -200°C TO 450°C

3. LEAK RATE < 1X10-9 ATM CC/SEC HE

Break, 5KV Isolation, 0.093" Dia Stainless Steel Tube Adapters, High Voltage Isolation, Thermal Isolation, Weldable Tube Ends, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTA	MOIT		N/A		
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	1//		
	DRAWN	WJ	9/11/2015	MP	F PRODUCT	s inc
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015	CHECKED		9/11/2015	TITLE:		
	ENG APPR.	WJ	9/11/2015		BREAK, 5KV	/
	THIRD ANGLE:		•			
A A TERIAL			ISOLATION, 0.093" DIA			
MATERIAL			STAINLESS STEEL TUBE			
	APPLICATION NEXT ASSY USED ON		ADAPTERS			
				DOWNL	OADED FROM MPFP	I.COM
FINISH	SURFACE FINIS	SH: 6	3 OR BETTER	DWG. N	10.	RE\
	UNLESS OTH	UNLESS OTHERWISE SPECIFIED:		A0574		
PLATING	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Monday, October 7, 2019 10:43:38 AM			