
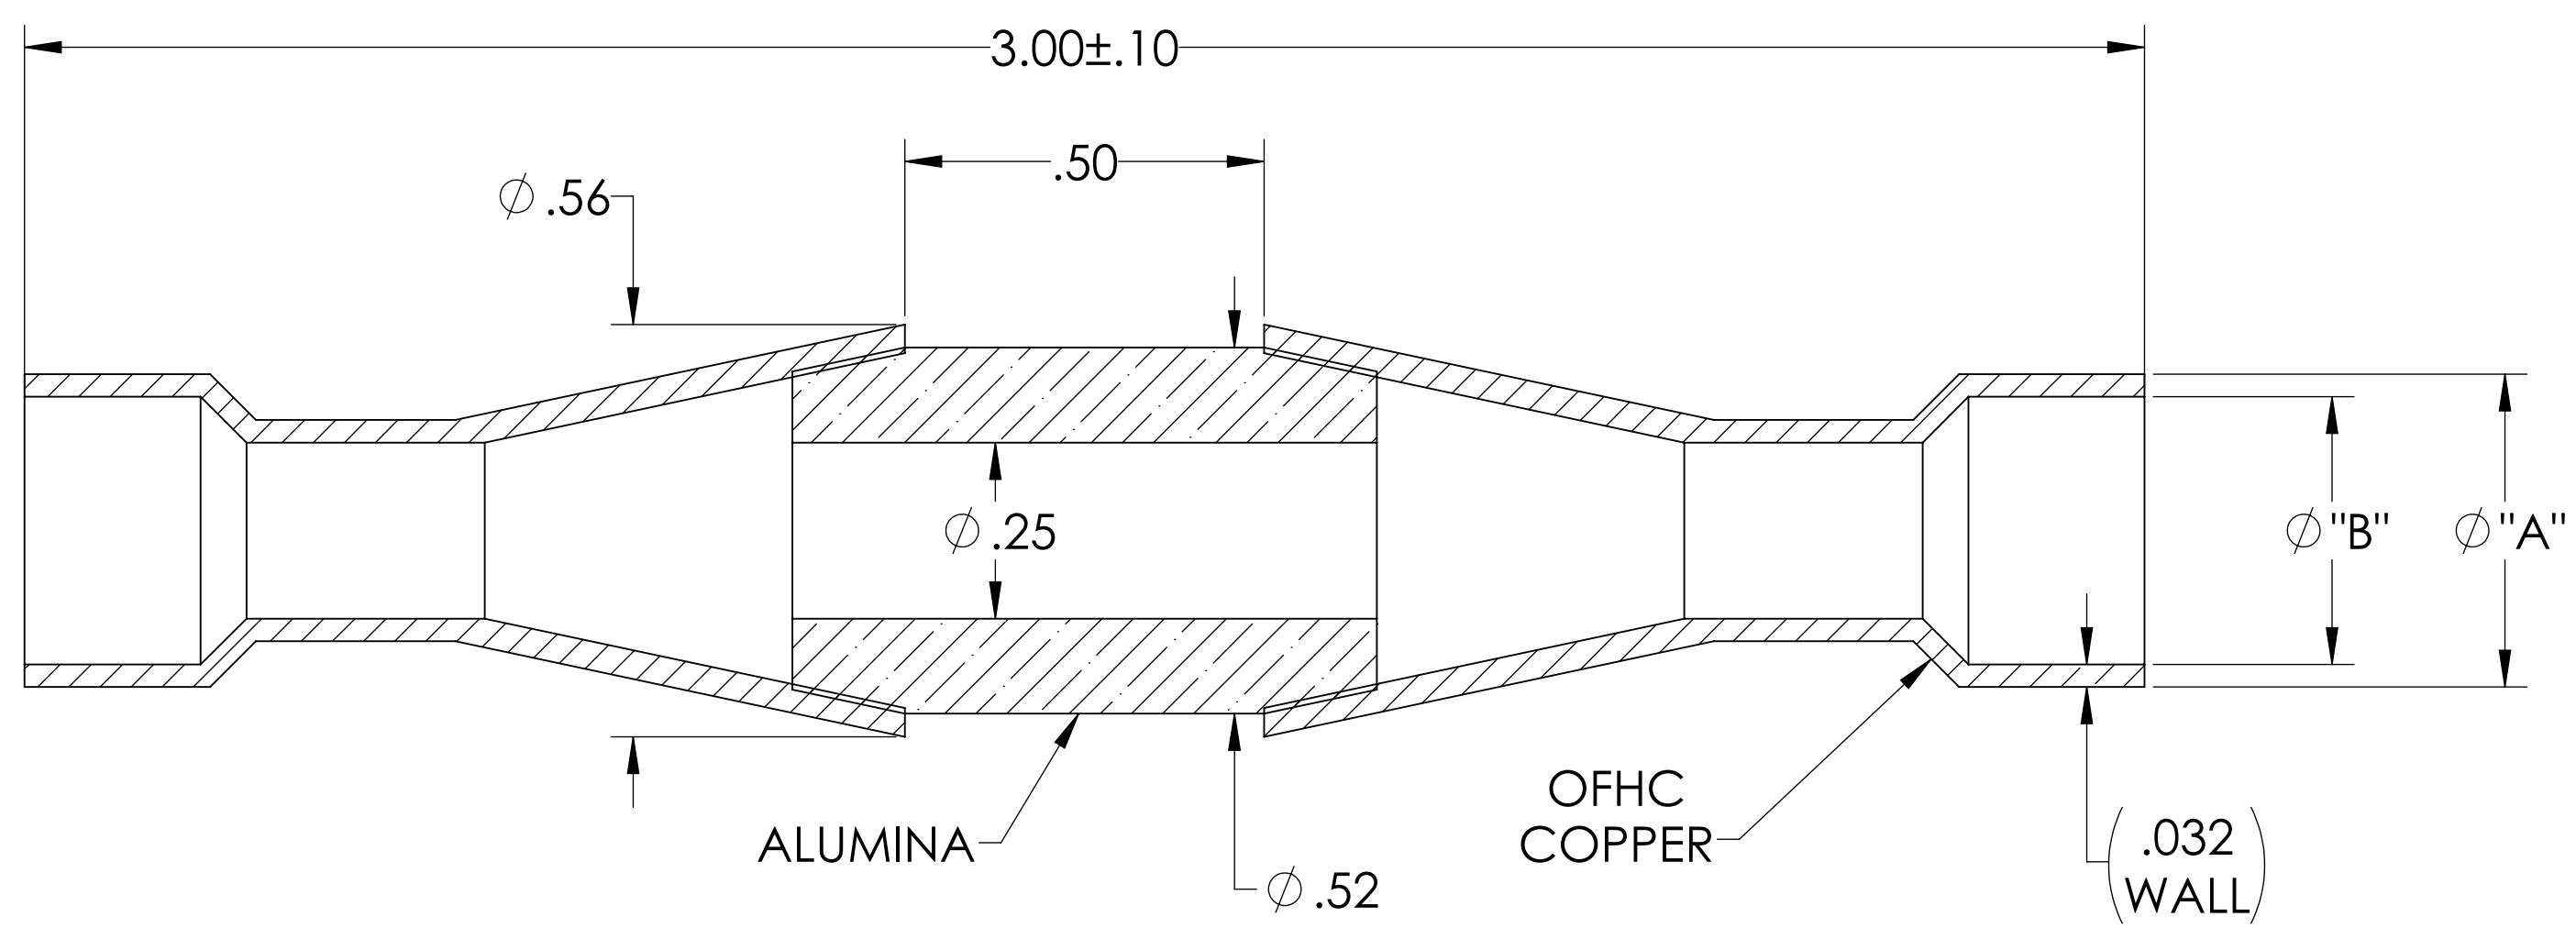


MPF PRODUCTS INC.

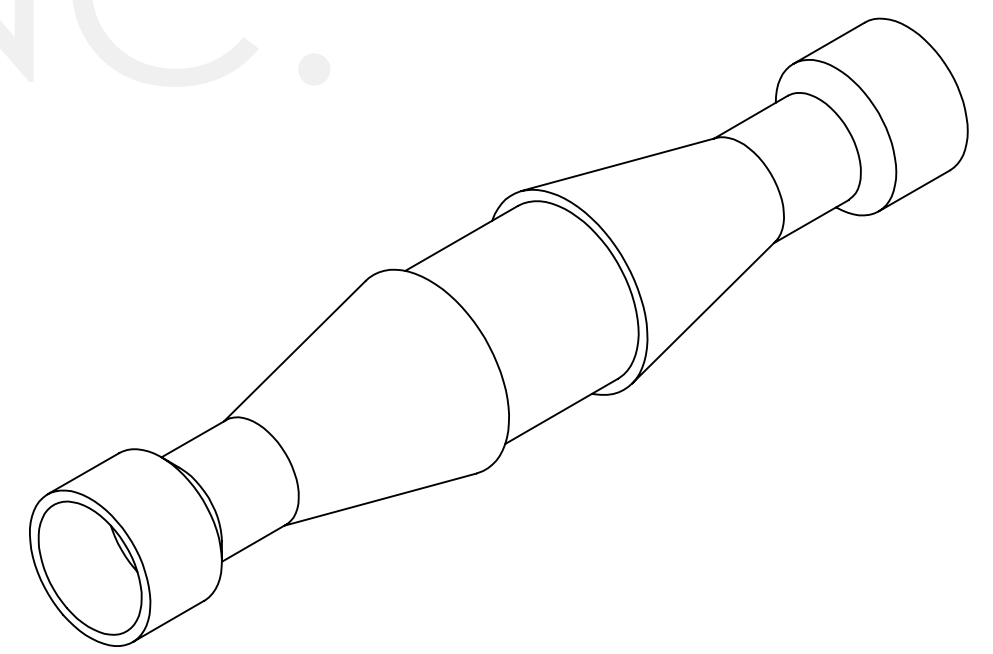

PART #	Ø"A"	Ø"B"
A0579-1-W	.44	.380
A0579-2-W	.32	.255

SPECIFICATIONS:

1. VOLTAGE: 5KV
2. TEMPERATURE: 0°C TO 250°C
3. LEAK RATE < 1X10-9 ATM CC/SEC HE

Break, 5KV Isolation, Copper Tube Adapters, High Voltage Isolation, Brazable Tube Ends, UHV Compatible

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		BREAK, 5KV ISOLATION, COPPER TUBE ADAPTERS	
FINISH		APPLICATION			
PLATING		NEXT ASSY USED ON			
SURFACE FINISH: 63 OR BETTER		UNLESS OTHERWISE SPECIFIED:		DOWNLOADED FROM MPFPI.COM	
ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		DWG. NO.		REV	
		A0579		A0579	
		Tuesday, September 10, 2019 4:07:09 PM			