
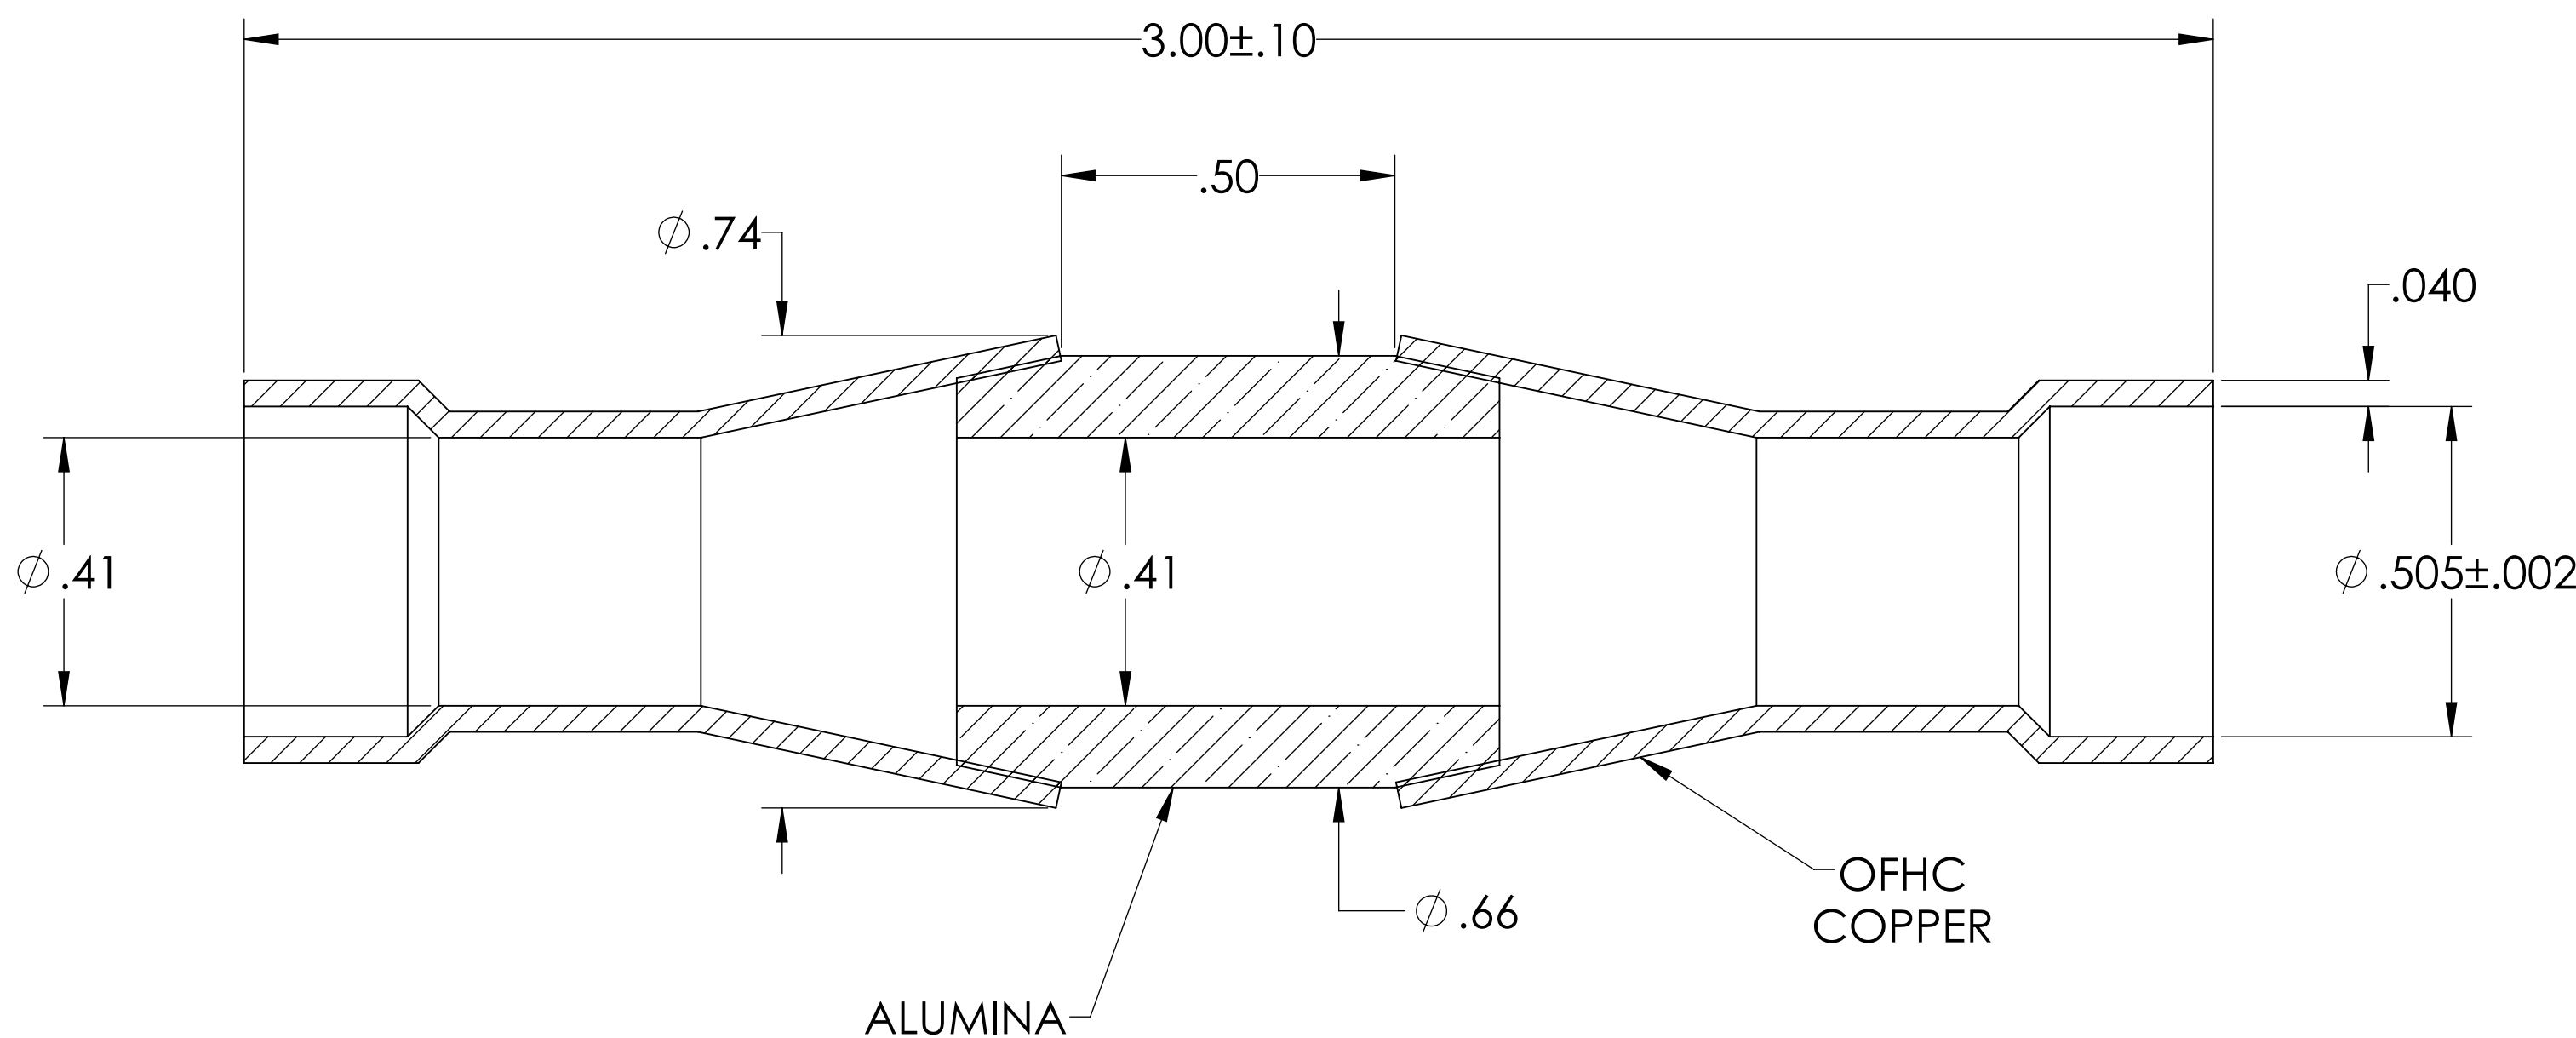


# MPF PRODUCTS INC.

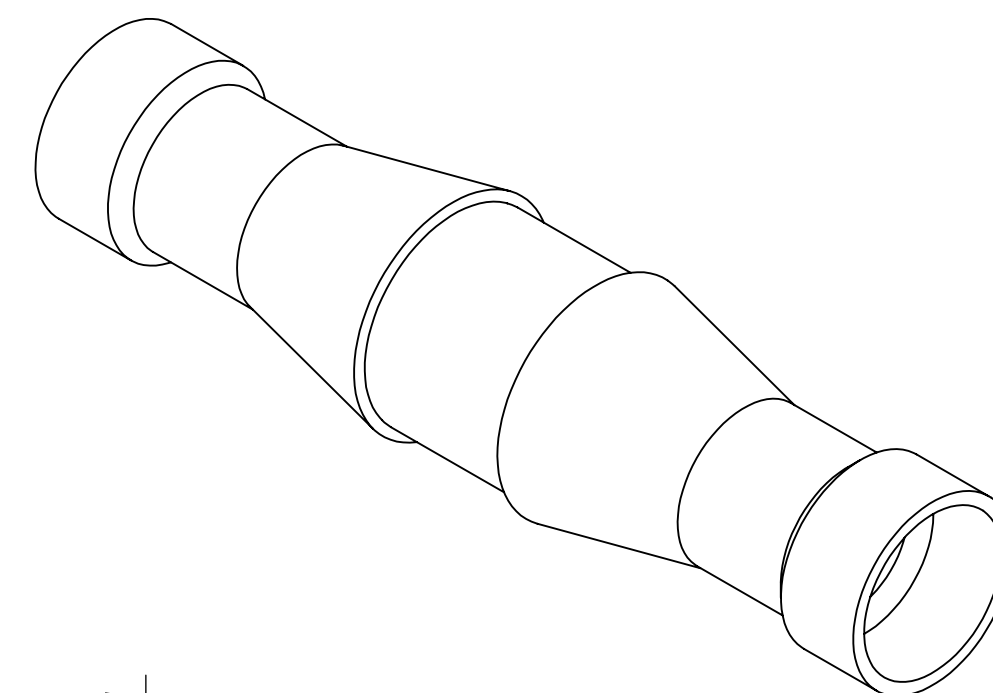

**SPECIFICATIONS:**

1. VOLTAGE: 5KV
2. TEMPERATURE: 0°C TO 250°C
3. LEAK RATE <math>< 1 \times 10^{-9}</math> ATM CC/SEC HE

Break, 5KV Isolation, 0.59" Dia Copper Tube Adapters (0.505" ID Socket), High Voltage Isolation, Brazable Tube Ends

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	NAME	DATE
ANGULAR: MACH $\pm 1/2^\circ$	WJ	WJ	9/11/2015
TWO PLACE DECIMAL $\pm .030$	CHECKED		9/11/2015
THREE PLACE DECIMAL $\pm .015$	ENG APPR.	WJ	9/11/2015
MATERIAL	THIRD ANGLE:		
FINISH	APPLICATION		
PLATING	NEXT ASSY	USED ON	
	SURFACE FINISH: $\sqrt{63}$ OR BETTER		
	UNLESS OTHERWISE SPECIFIED:		
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		
	TITLE:		REV
	BREAK, 5KV ISOLATION, 0.59" DIA COPPER TUBE ADAPTERS (0.505" ID SOCKET)		
	DWG. NO.		
	A0580-1-W		
	Friday, January 25, 2019 8:52:28 AM		