
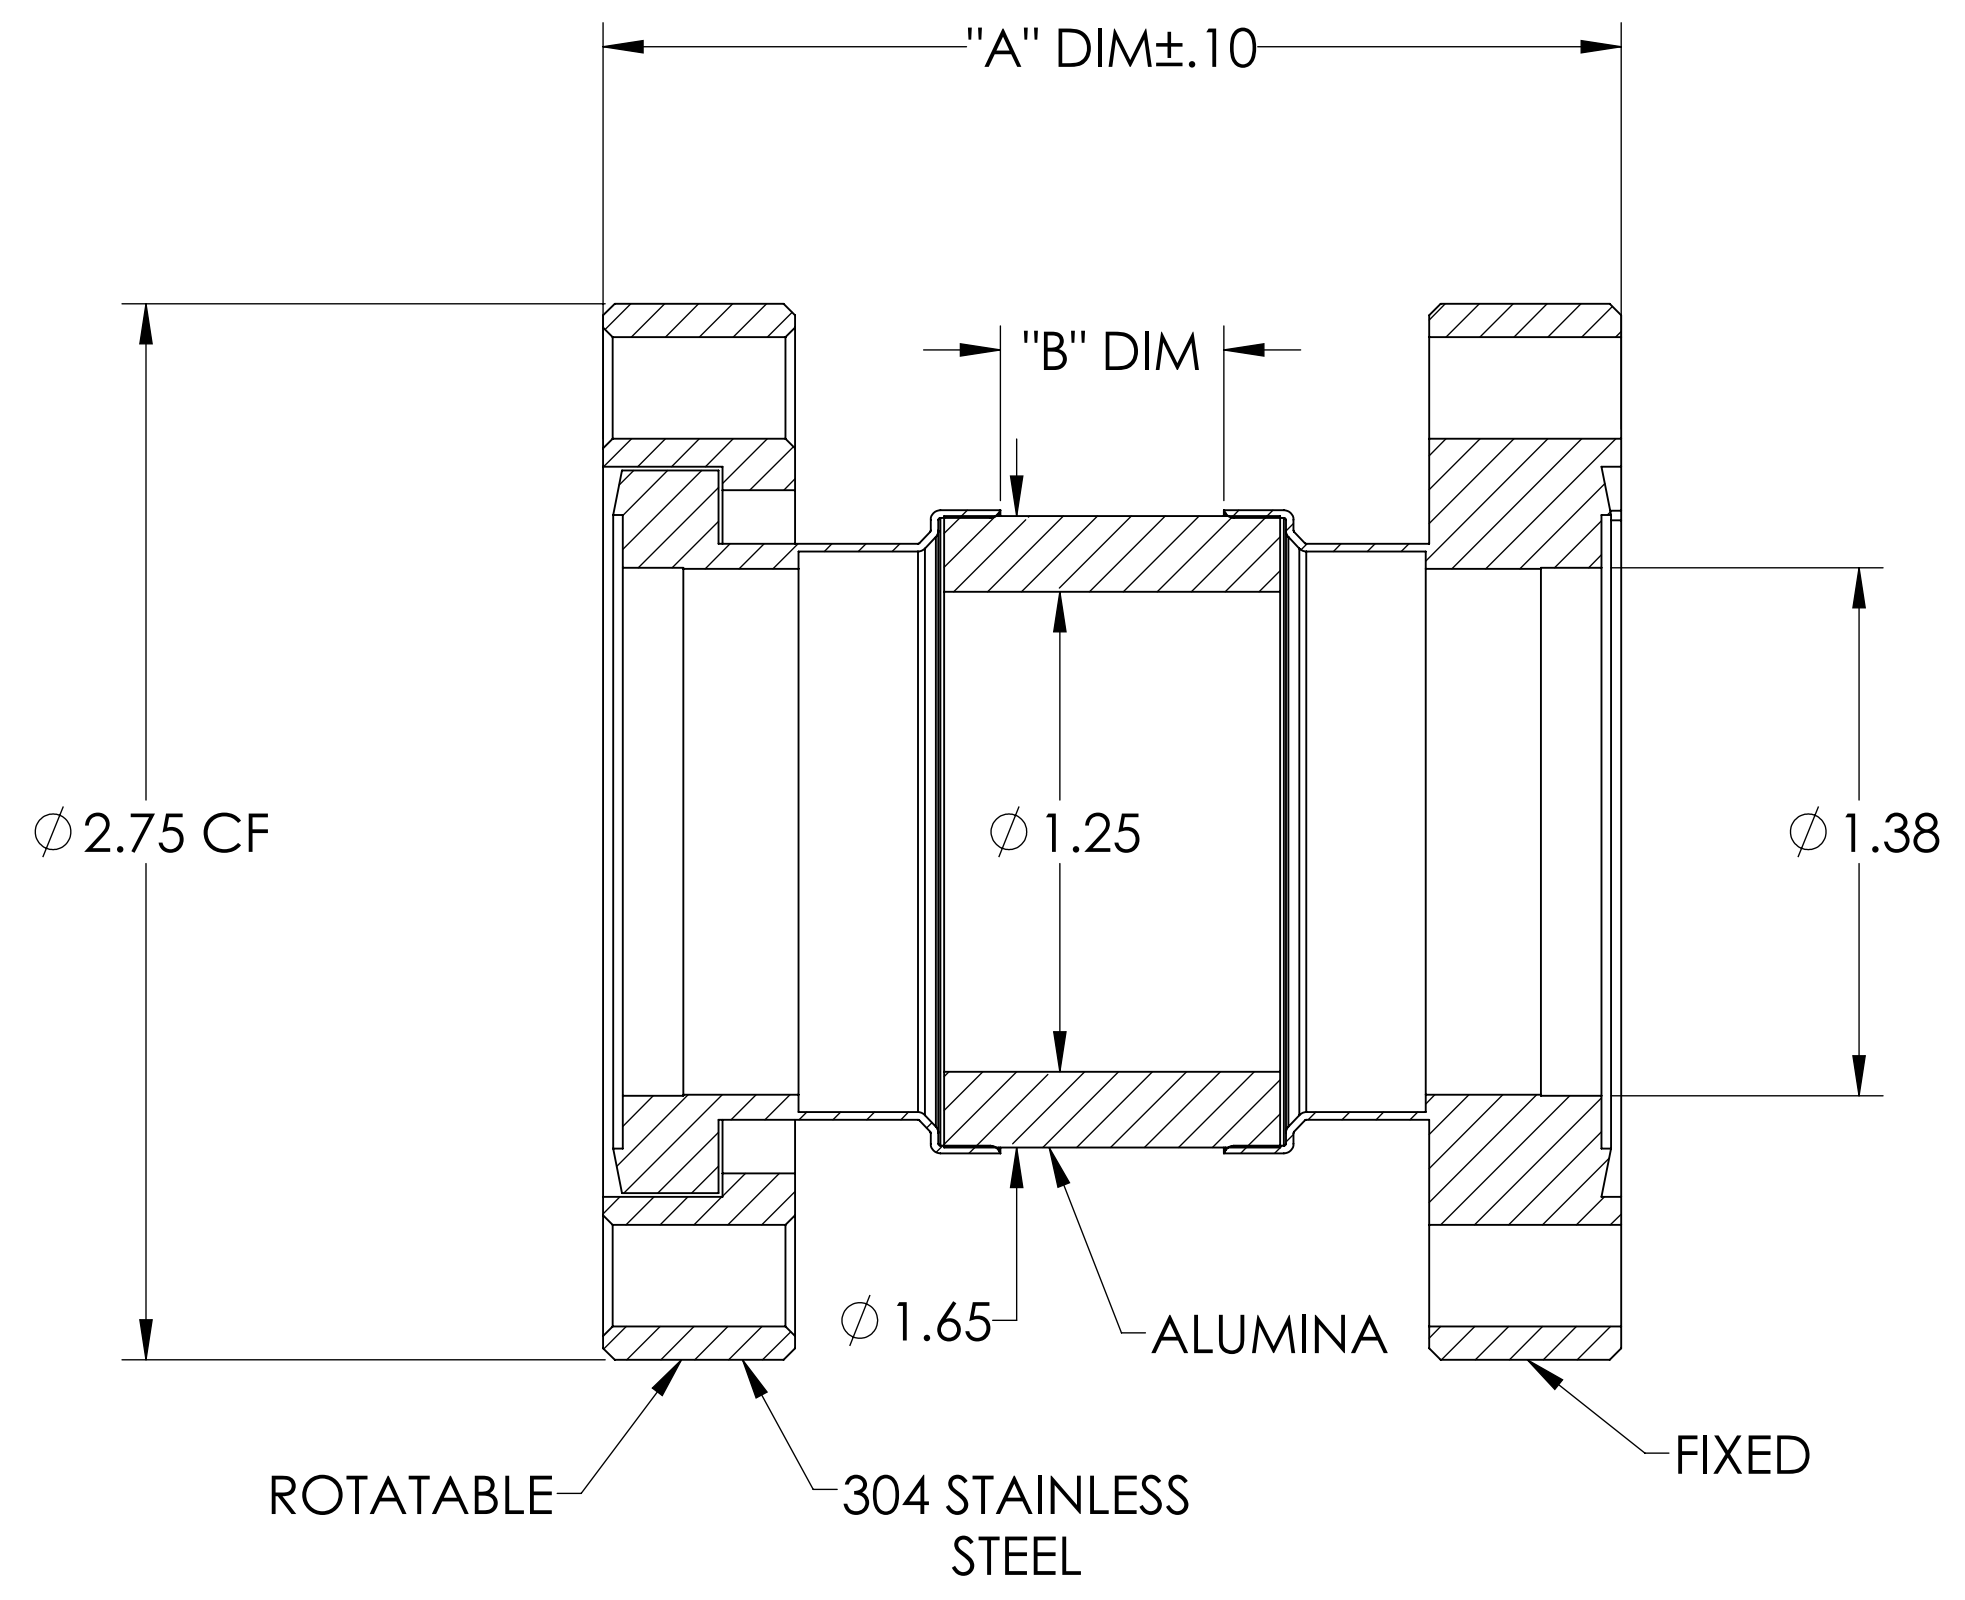


MPF PRODUCTS INC.

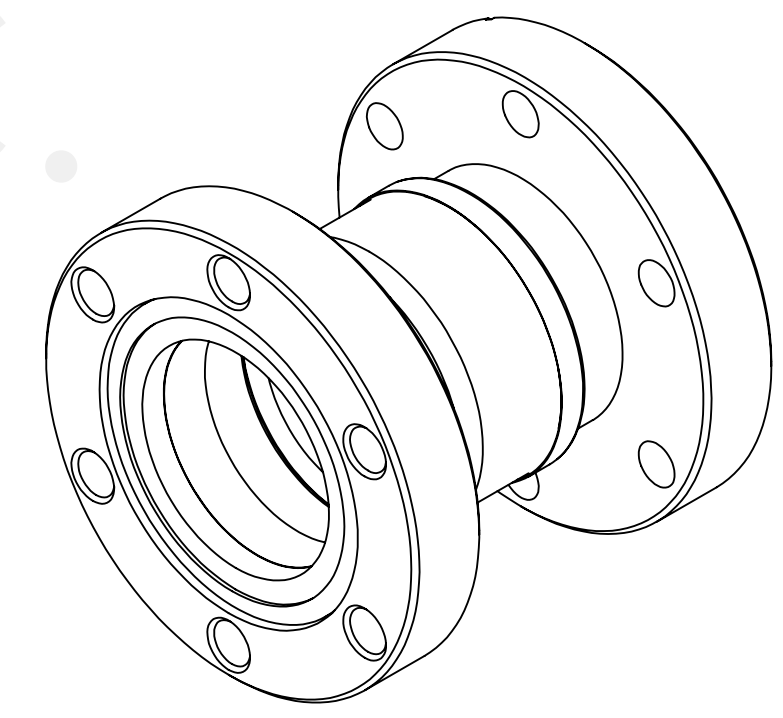

PART #	"A" ±.10	("B") MIN	KV RATING
A0595-1-CF	2.70	.32	5
A0595-2-CF	4.30	2.00	30
A0595-3-CF	6.40	4.00	60

SPECIFICATIONS:

1. VOLTAGE: 5, 30, 60KV
2. TEMPERATURE: -200°C TO 450°C
3. LEAK RATE < 1X10-9 ATM CC/SEC HE

Break, 5KV Isolation, 1.25" Inner Dia, 2.75" Conflat Flange, High Voltage Isolation, Thermal Isolation, Rotatable Conflat Flange, UHV Compatible

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A		
DIMENSIONS ARE IN INCHES		NAME	DATE	MPF PRODUCTS INC. TITLE: BREAK, 5, 30, 60KV ISOLATION, 1.25" INNER DIA, 2.75" CONFLAT FLANGE DOWNLOAD FROM MPFPI.COM		
TOLERANCES:		DRAWN	WJ			9/11/2015
ANGULAR: MACH ± 1/2°		CHECKED				9/11/2015
TWO PLACE DECIMAL ± .030		ENG APPR.	WJ			9/11/2015
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		DWG. NO. A0595		
MATERIAL				REV		
FINISH		APPLICATION		Friday, January 25, 2019 11:57:34 AM		
PLATING		NEXT ASSY		USED ON		
		SURFACE FINISH:		UNLESS OTHERWISE SPECIFIED:		
		63/ OR BETTER		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		