


# MPF PRODUCTS INC.

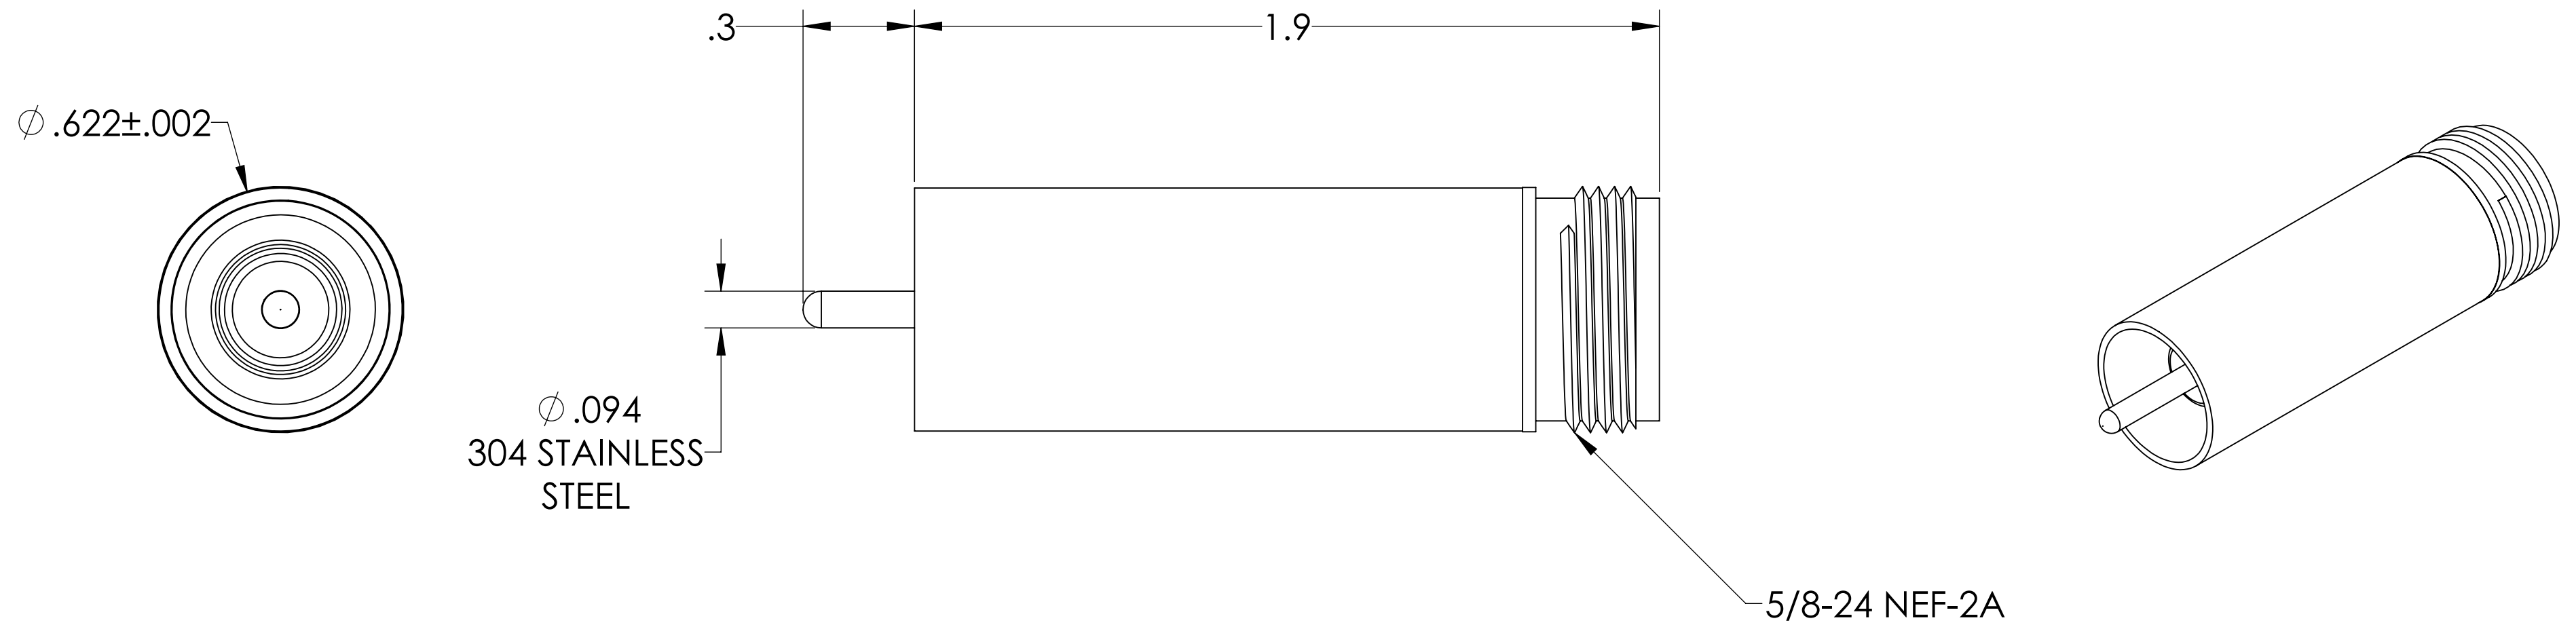

PART #	AIRSIDE CONNECTOR INCLUDED
A0654-1-W	YES
A0654-2-W	NO

**NOTE:**

1. SHIELD: GROUNDING
2. VOLTAGE: 500 VOLTS DC
3. CURRENT: 3 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

Type-N Coaxial Feedthrough, 1 Pin, Grounded Shield, 0.622" Dia SS Weld Adapter, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH $\pm 1/2^\circ$	DRAWN	9/11/2015
TWO PLACE DECIMAL $\pm .030$	CHECKED	9/11/2015
THREE PLACE DECIMAL $\pm .015$	ENG APPR.	9/11/2015
MATERIAL	THIRD ANGLE:	
FINISH	APPLICATION	
PLATING	NEXT ASSY	USED ON
	SURFACE FINISH:	63 OR BETTER
	UNLESS OTHERWISE SPECIFIED:	
	ALL DIAMETERS CONCENTRIC WITHIN .005.	
	REMOVE ALL BURRS AND SHARP EDGES	
	TITLE:	MPF PRODUCTS INC.
		TYPE-N COAXIAL FEEDTHROUGH, 1 PIN, GROUNDING SHIELD, 0.622" DIA SS WELD ADAPTER
	DOWNLOADED FROM MPFPI.COM	
	DWG. NO.	A0654
	REV	
	Friday, January 18, 2019 9:47:26 AM	