


MPF PRODUCTS INC.

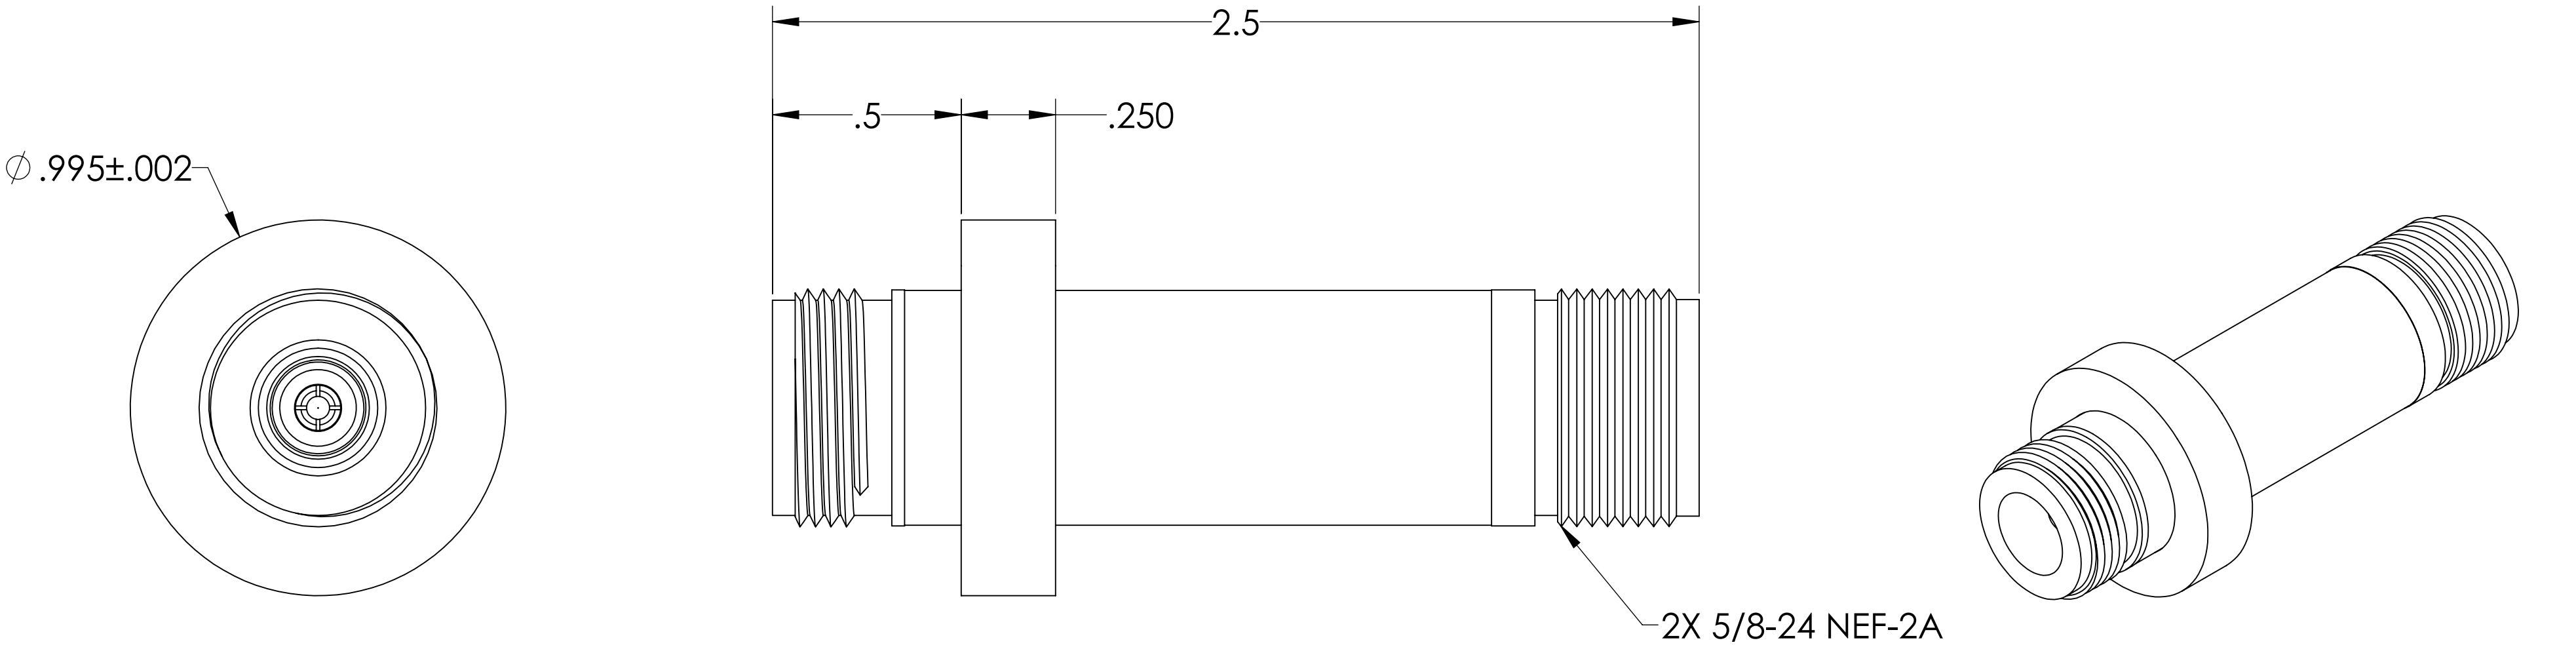

PART #	AIRSIDE CONNECTOR INCLUDED
A0659-1-W	YES
A0659-2-W	NO

- NOTE:
- 1. SHIELD: GROUNDED
  - 2. VOLTAGE: 500 VOLTS DC
  - 3. CURRENT: 3 AMPS
  - 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
  - 5. IMPEDANCE: NON-CONSTANT

Type-N Coaxial Feedthrough, 1 Pin, Grounded Shield, Double Ended, 0.995" Dia SS Weld Adapter, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES TOLERANCES:  ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015	DRAWN	WJ	9/11/2015
	CHECKED		9/11/2015
	ENG APPR.	WJ	9/11/2015
	THIRD ANGLE: 		
MATERIAL	APPLICATION NEXT ASSY USED ON		
FINISH	SURFACE FINISH: 63/ OR BETTER		
PLATING	UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		
TITLE: TYPE-N COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, DOUBLE ENDED, 0.995" DIA SS WELD ADAPTER		DWG. NO. A0659 REV	
DOWNLOADED FROM MPFPI.COM		Friday, January 18, 2019 9:49:10 AM	