
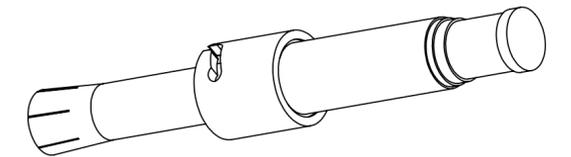
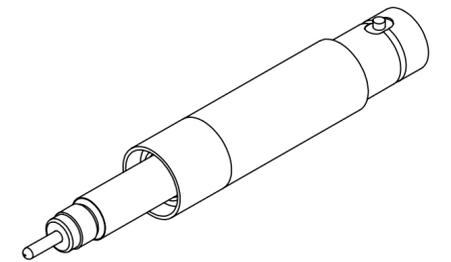


# MPF PRODUCTS INC.

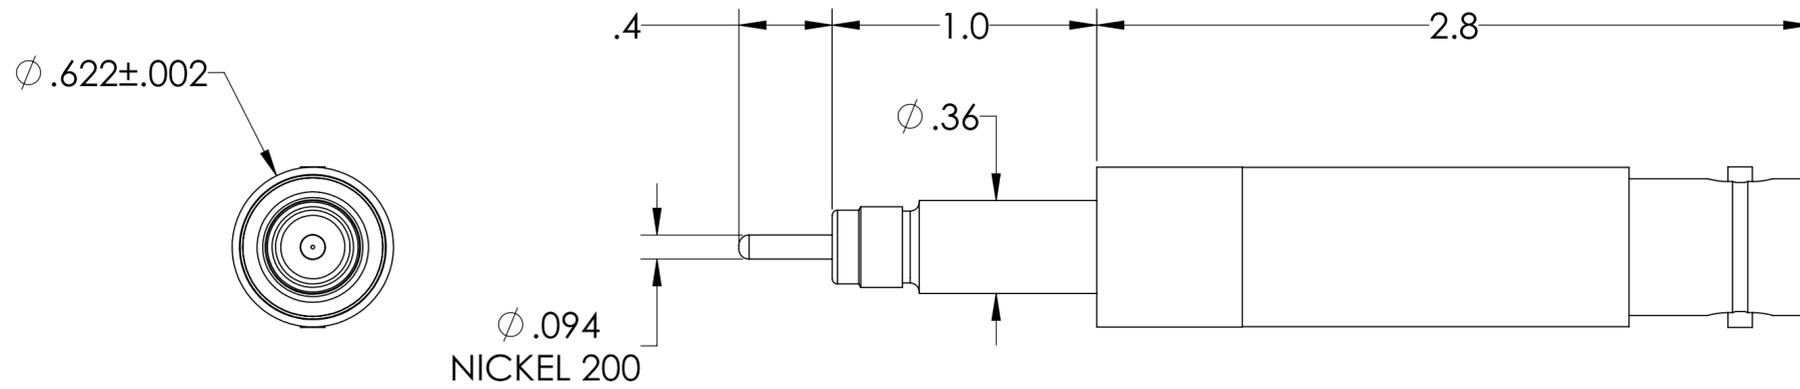

PART #	AIRSIDE CONNECTOR INCLUDED
A0702-1-W	YES
A0702-2-W	NO

**NOTE:**

1. SHIELD: GROUNDED
2. VOLTAGE: 20,000 VOLTS DC
3. CURRENT: 15 AMP
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C ( AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

SHV-20 Coaxial Feedthrough, 1 Pin, Grounded Shield, Exposed Insulator, 0.620" Dia SS Weld Adapter, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH $\pm 1/2^\circ$	WJ	9/11/2015
TWO PLACE DECIMAL $\pm .030$	CHECKED	9/11/2015
THREE PLACE DECIMAL $\pm .015$	ENG APPR.	WJ 9/11/2015
MATERIAL	THIRD ANGLE:	
	APPLICATION	
	NEXT ASSY	USED ON
FINISH	SURFACE FINISH:	63/ OR BETTER
PLATING	UNLESS OTHERWISE SPECIFIED:	
	ALL DIAMETERS CONCENTRIC WITHIN .005.	REMOVE ALL BURRS AND SHARP EDGES
	TITLE:	SHV-20 COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, EXPOSED, 0.620" DIA SS WELD ADAPTER
	DOWNLOADED FROM MPFPI.COM	
	DWG. NO.	A0702
	REV	
	Monday, October 8, 2018 8:38:44 AM	