
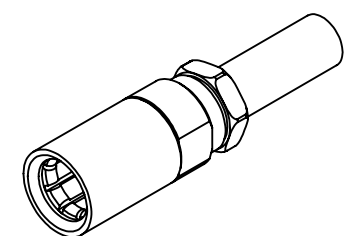
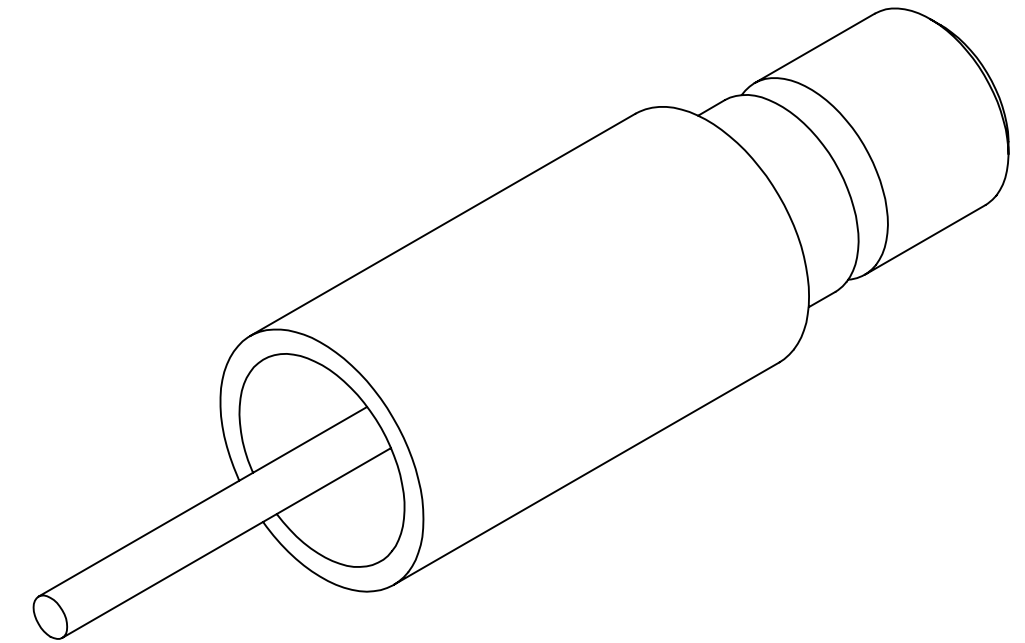


MPF PRODUCTS INC.

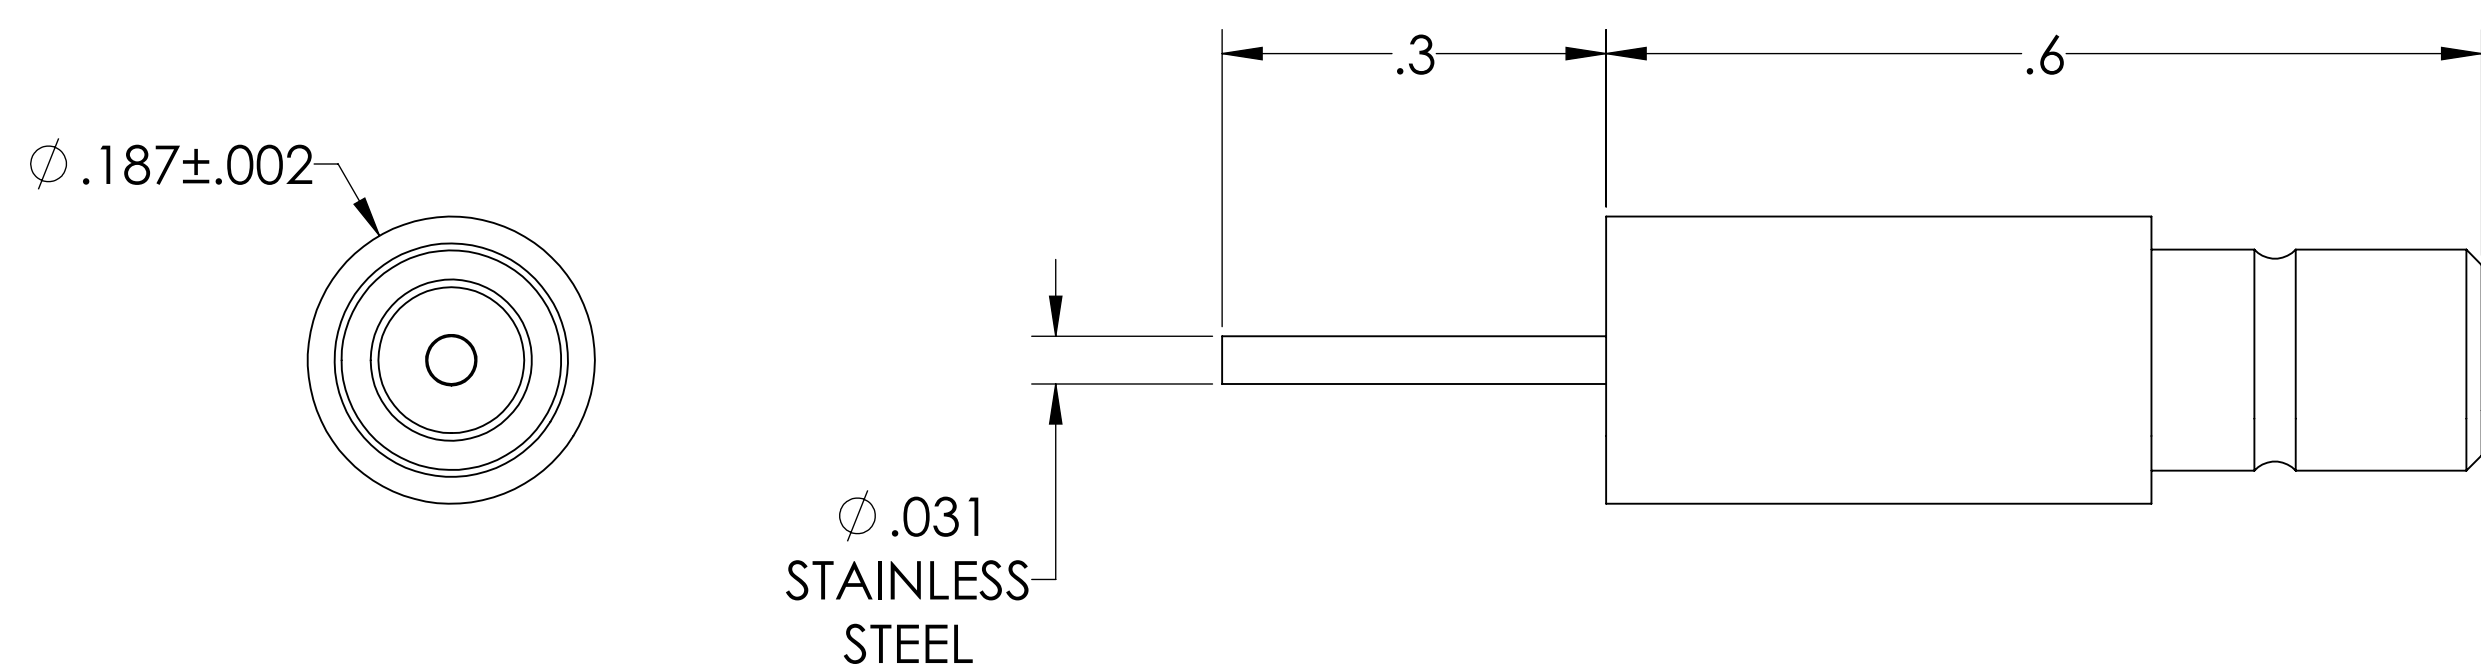

PART #	AIRSIDE CONNECTOR INCLUDED
A0717-1-W	YES
A0717-2-W	NO

NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 375 VOLTS DC
3. CURRENT: 1.4 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

SMB Coaxial Feedthrough, 1 Pin, Grounded Shield, 0.187" Dia SS Weld Adapter, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A					
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	NAME	DATE				
ANGULAR: MACH $\pm 1/2^\circ$	WJ	WJ	9/11/2015				
TWO PLACE DECIMAL $\pm .030$	CHECKED		9/11/2015				
THREE PLACE DECIMAL $\pm .015$	ENG APPR.	WJ	9/11/2015				
MATERIAL	THIRD ANGLE:						
FINISH	APPLICATION	<table border="1"> <tr> <th>NEXT ASSY</th> <th>USED ON</th> </tr> <tr> <td> </td> <td> </td> </tr> </table>		NEXT ASSY	USED ON		
NEXT ASSY	USED ON						
PLATING	SURFACE FINISH:	$\sqrt{63}$ OR BETTER					
	UNLESS OTHERWISE SPECIFIED:	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES					
	TITLE:	MPF PRODUCTS INC. SMB COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, 0.187" DIA SS WELD ADAPTER					
	DOWNLOADED FROM MPFPI.COM	DWG. NO. A0717 REV					
	Friday, April 5, 2019 9:05:51 AM	SHEET 1 OF 1					