


MPF PRODUCTS INC.

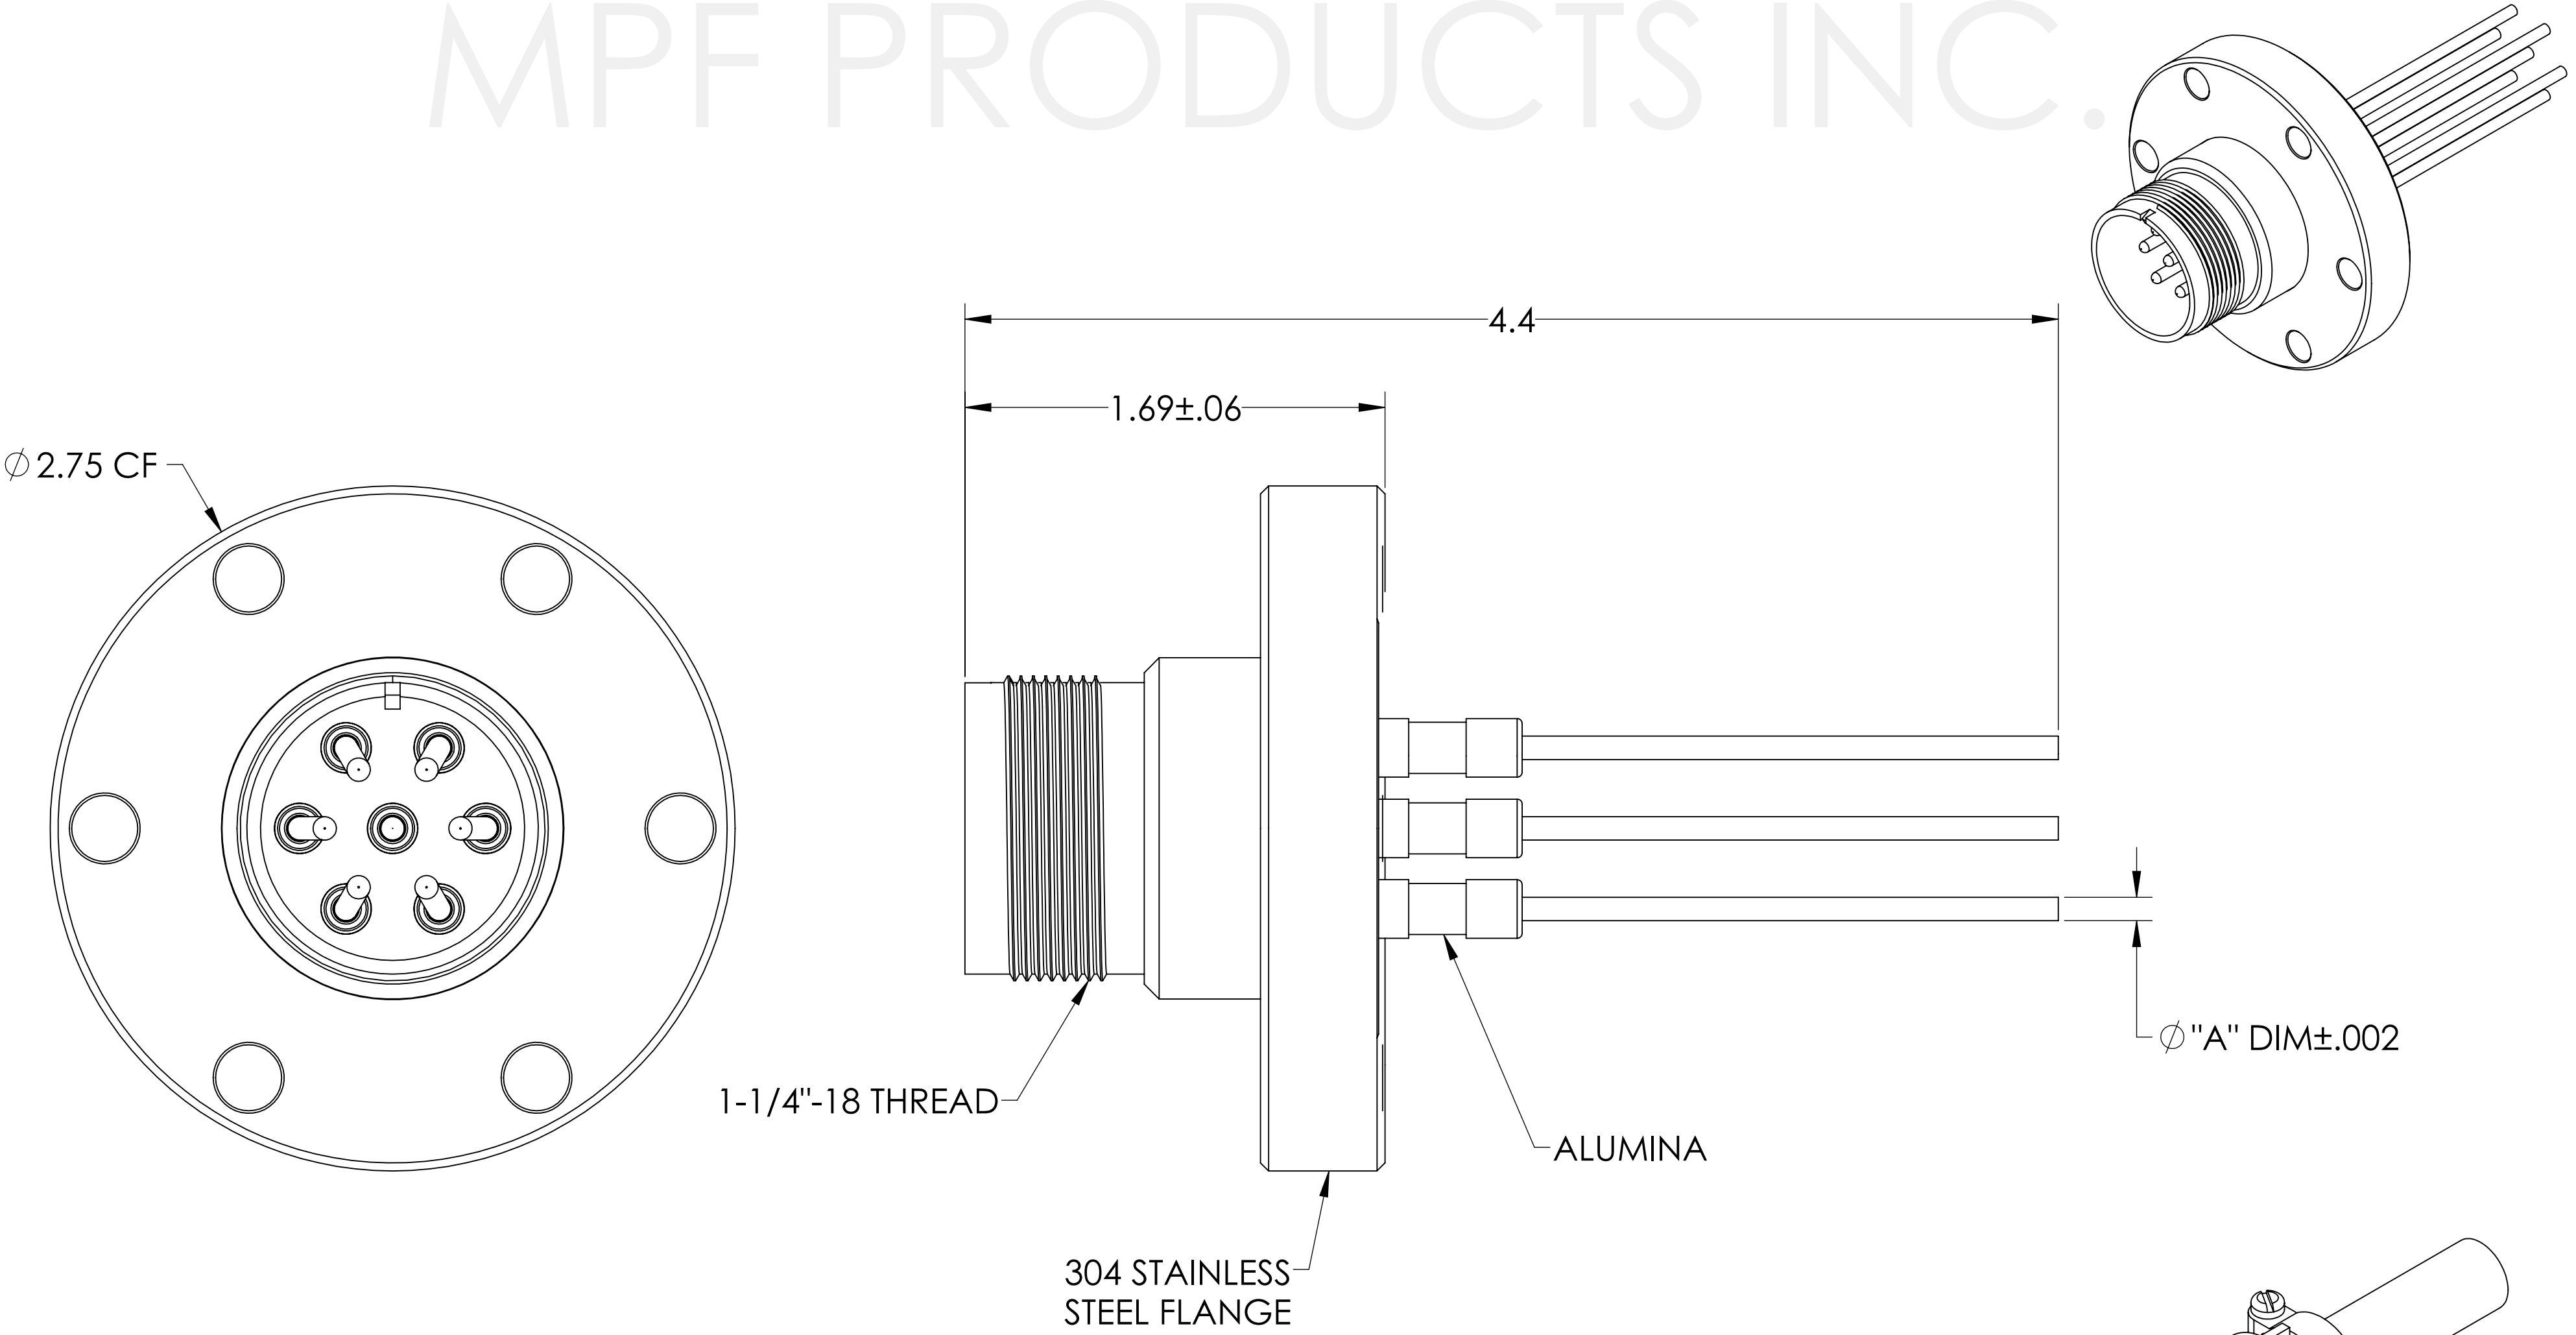

PART #	"A" DIM	CONDUCTOR MATERIAL	CURRENT RATING (PER PIN)
A0752-1-CF	.094	OFHC COPPER	23 AMPS
A0752-2-CF	.092	NICKEL 200	15 AMPS

- SPECIFICATIONS:
- 1. VOLTAGE: 700 VOLTS DC
 - 2. CURRENT: SEE TABLE
 - 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
 - 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough, 7 Pins, 700 Volts, w/ Air-side Connector, 2.75" Conflat Flange

UNLESS OTHERWISE SPECIFIED:		QUOTATION #	
DIMENSIONS ARE IN INCHES TOLERANCES:		N/A	
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015	DRAWN	NAME	DATE
	CHECKED	WJ	9/11/2015
	ENG APPR.	WJ	9/11/2015
	THIRD ANGLE:		
MATERIAL	APPLICATION		
	NEXT ASSY USED ON		
FINISH	SURFACE FINISH: 63/ OR BETTER		
PLATING	UNLESS OTHERWISE SPECIFIED:		
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
		Friday, January 25, 2019 9:41:40 AM	

MPF PRODUCTS INC.

TITLE:

MULTIPIN, 7 PINS, 700V, 275CF

DOWNLOADED FROM MPFPI.COM

DWG. NO.

A0752

REV