


MPF PRODUCTS INC.

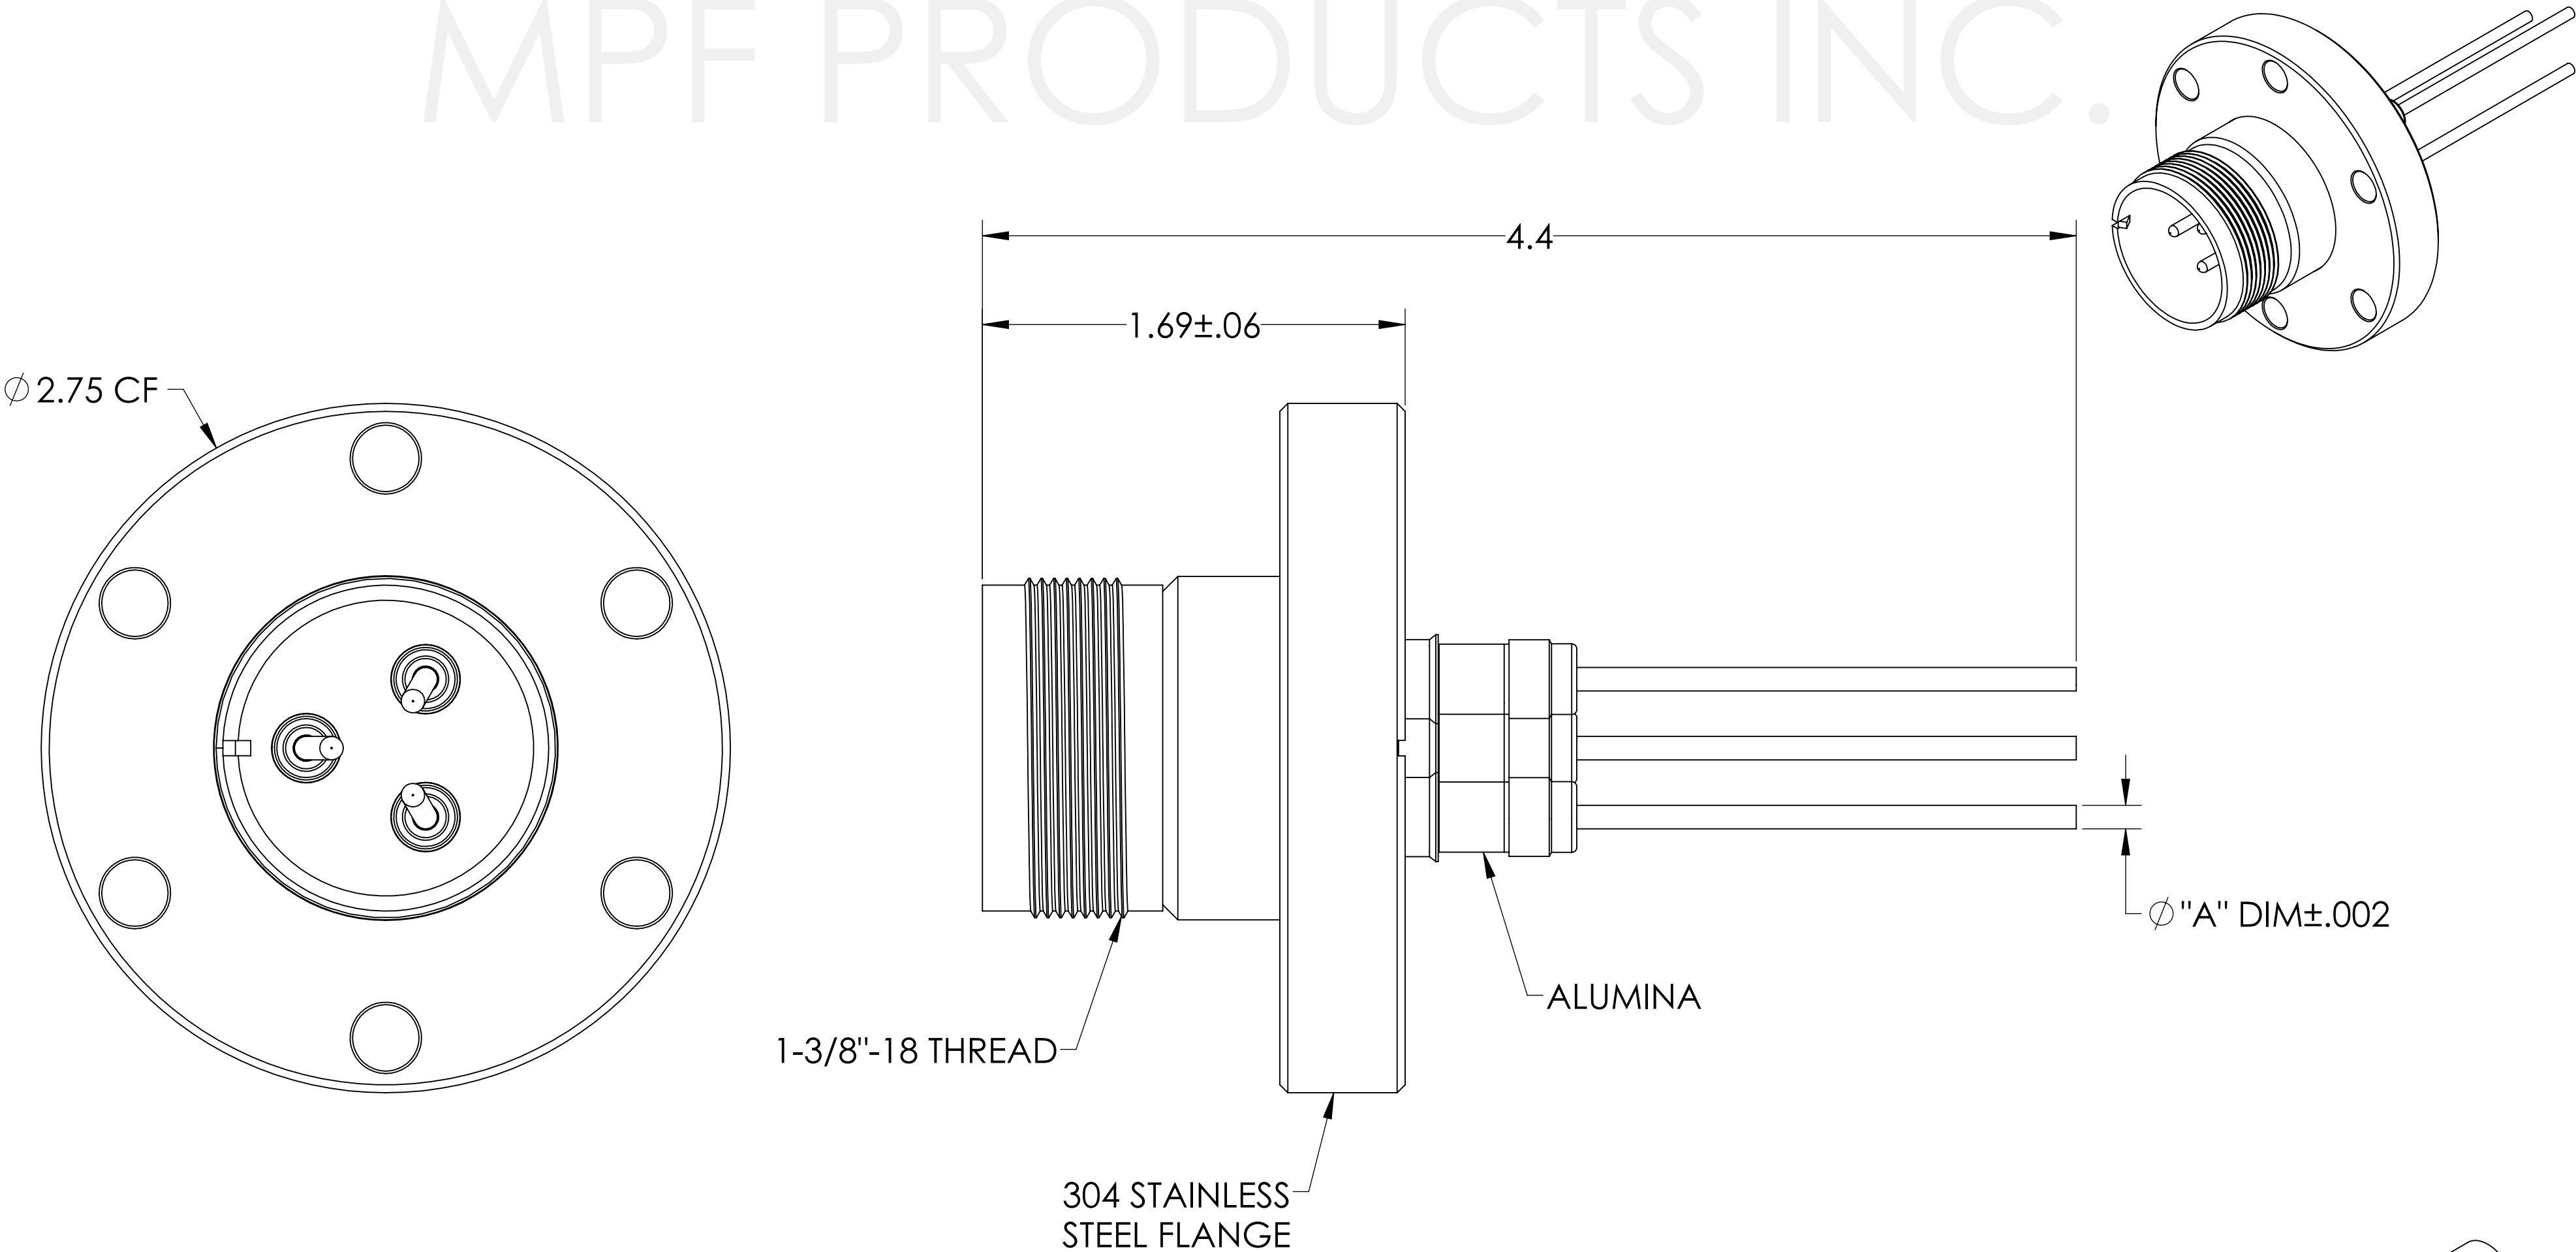




PART #	"A" DIM	CONDUCTOR MATERIAL	CURRENT RATING (PER PIN)
A0753-1-CF	.094	OFHC COPPER	23 AMPS
A0753-2-CF	.092	NICKEL 200	15 AMPS

SPECIFICATIONS:

- 1. VOLTAGE: 700 VOLTS DC
- 2. CURRENT: SEE TABLE
- 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
- 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough, 3 Pins, 700 Volts, w/ Air-side Connector, 2.75" Conflat Flange

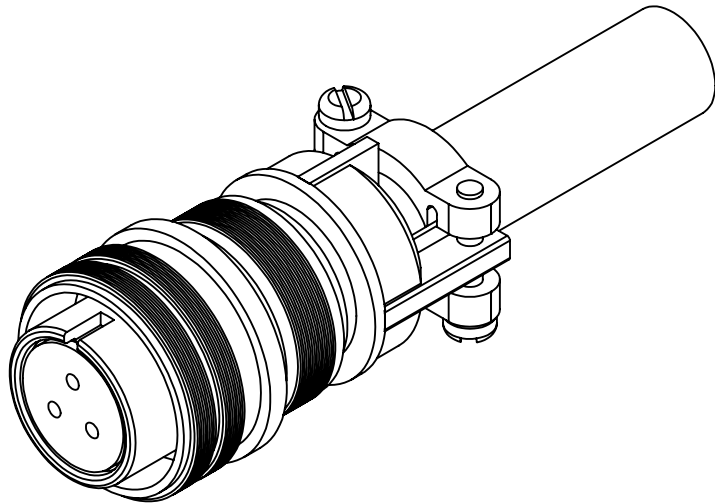

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC.
		DRAWN	WJ	9/11/2015	
		CHECKED		9/11/2015	
		ENG APPR.	WJ	9/11/2015	
MATERIAL		THIRD ANGLE:			TITLE: MULTIPIN, 3 PINS, 700V, 275CF
					
		APPLICATION			
		NEXT ASSY USED ON			
FINISH		SURFACE FINISH:  OR BETTER			DOWNLOADED FROM MPFPI.COM
		UNLESS OTHERWISE SPECIFIED:			
PLATING		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			DWG. NO. A0753 REV
Wednesday, October 11, 2023 3:08:03 PM					