
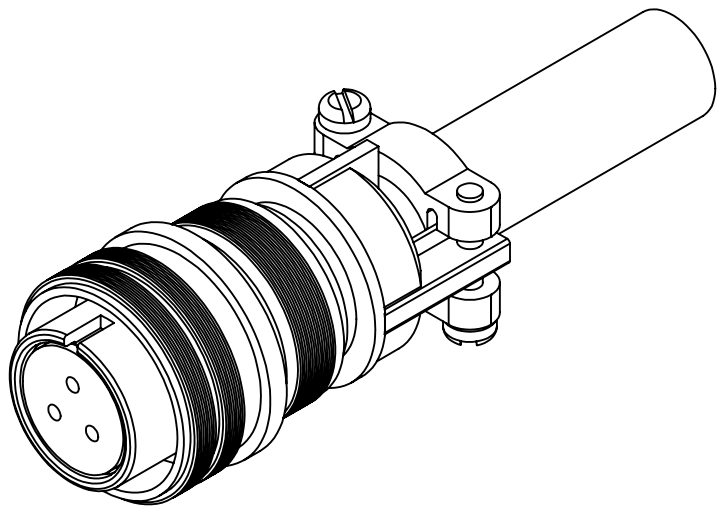
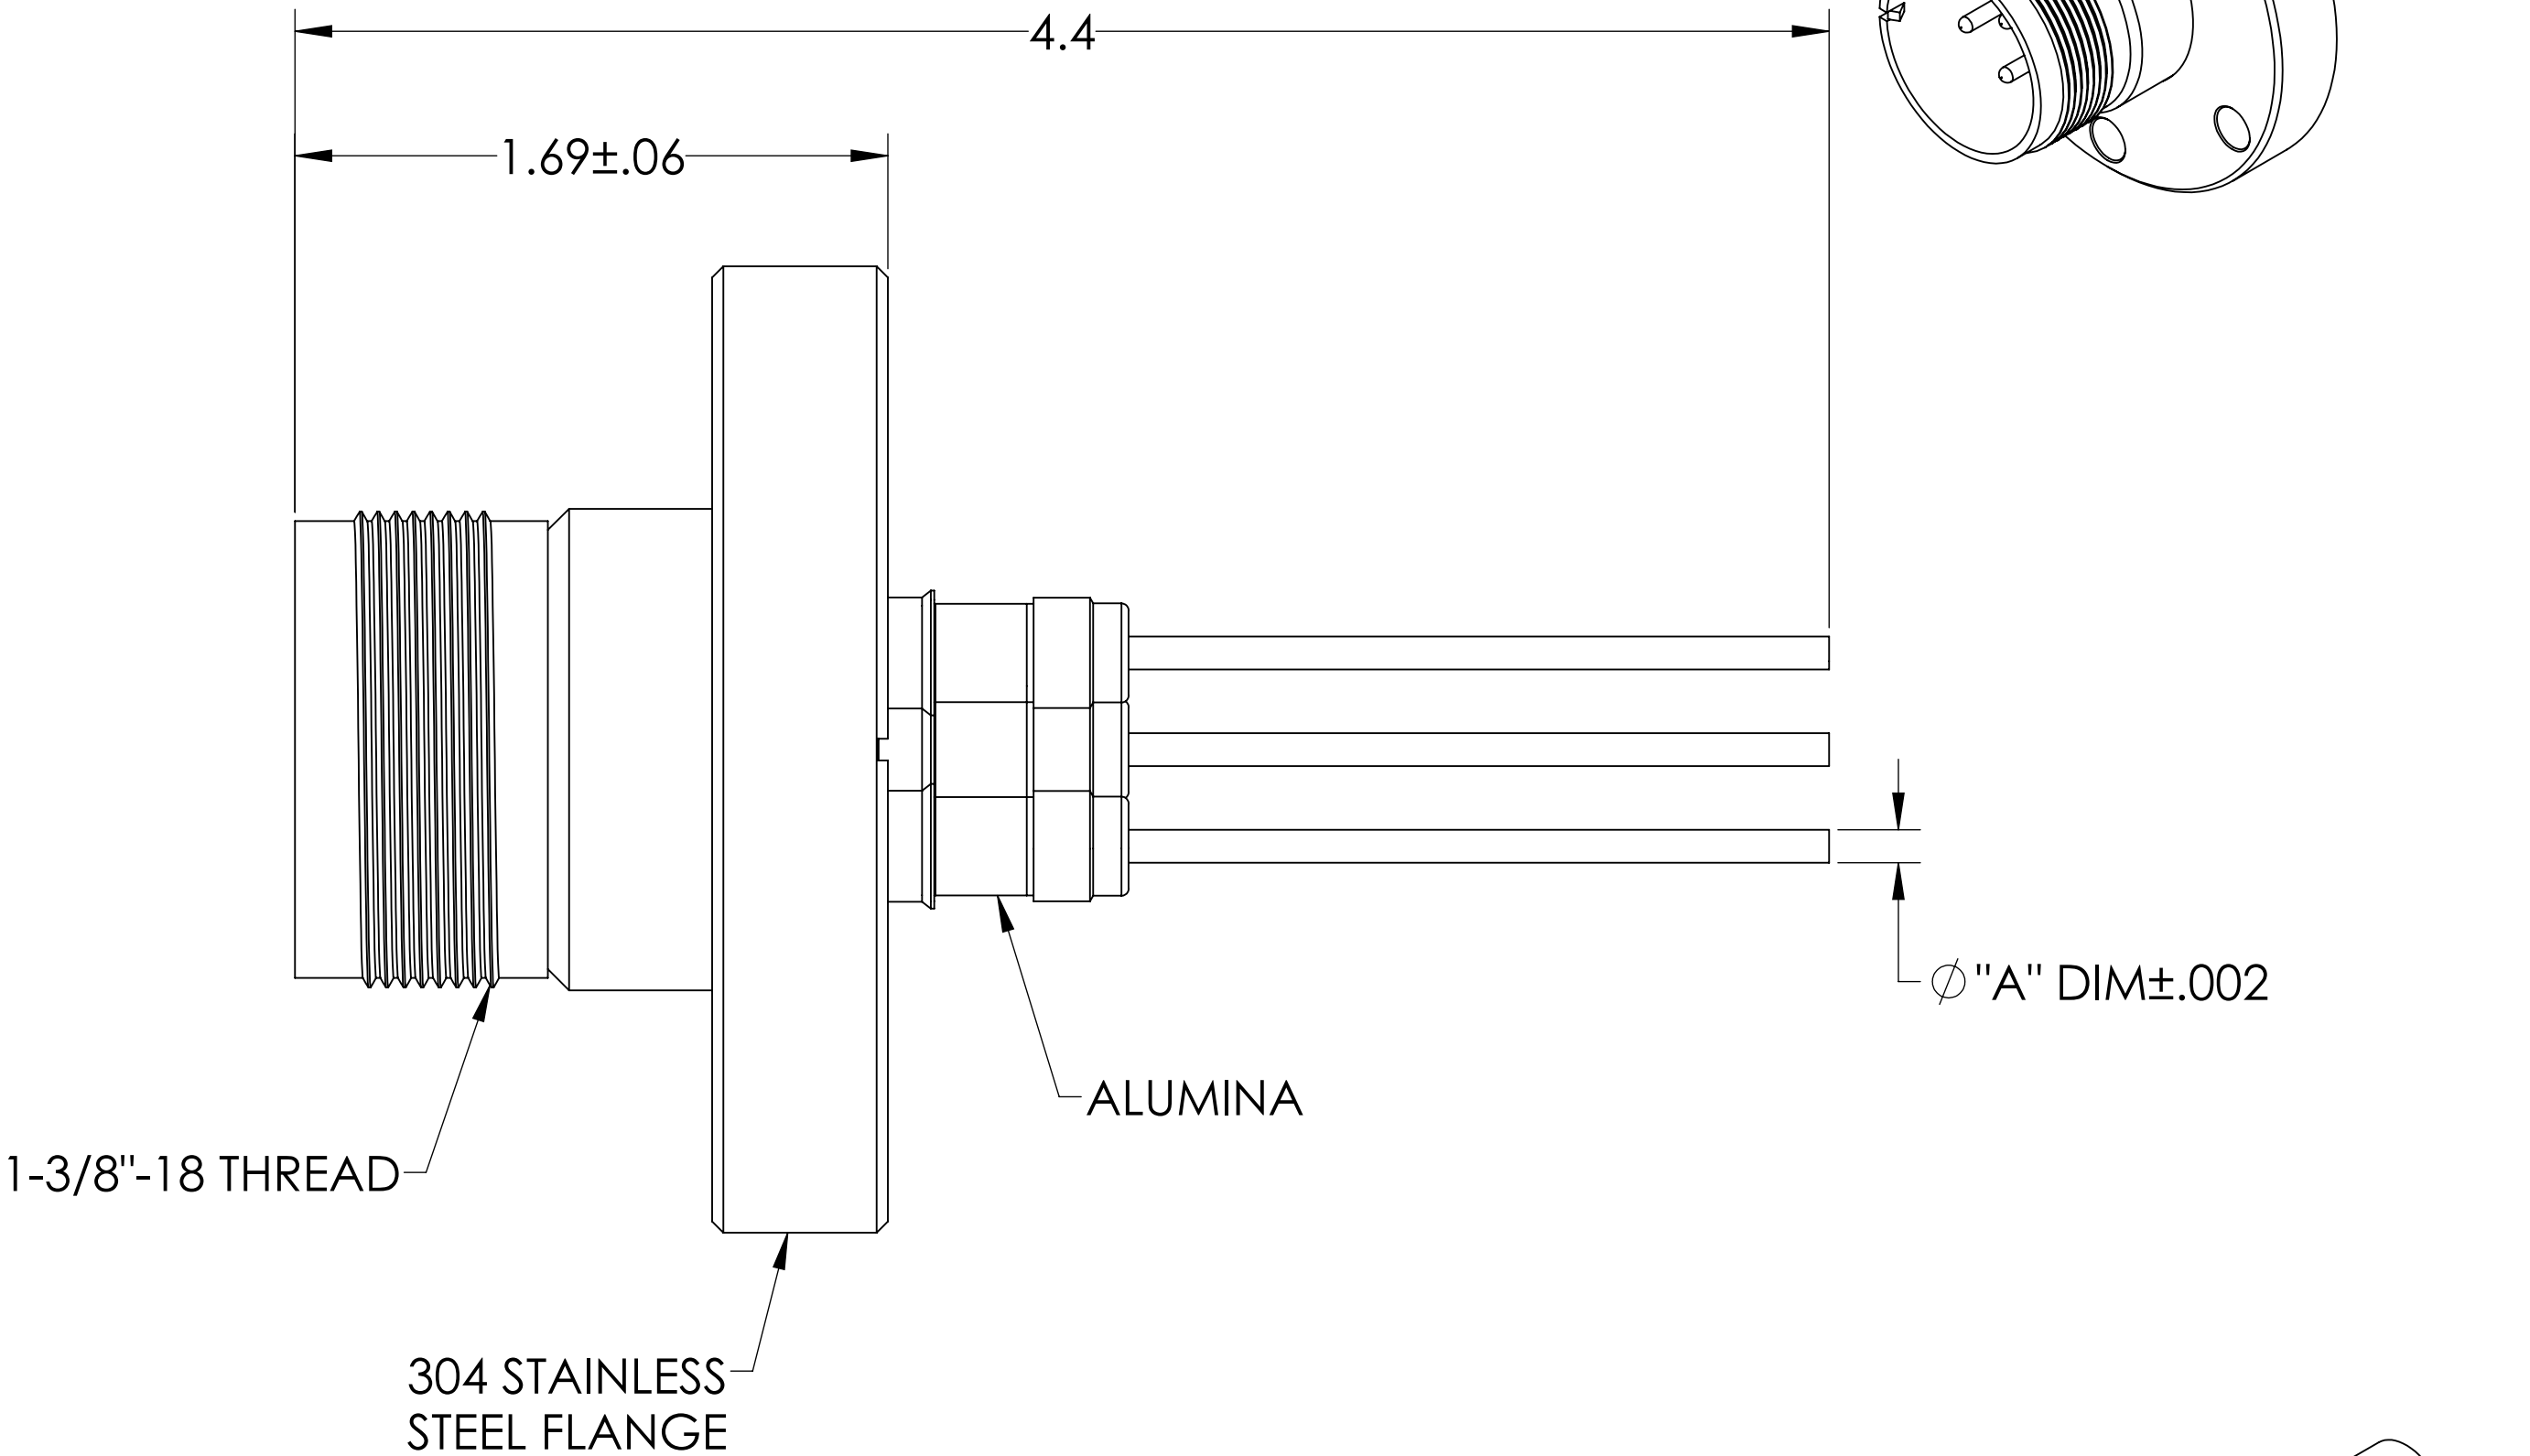


MPF PRODUCTS INC.

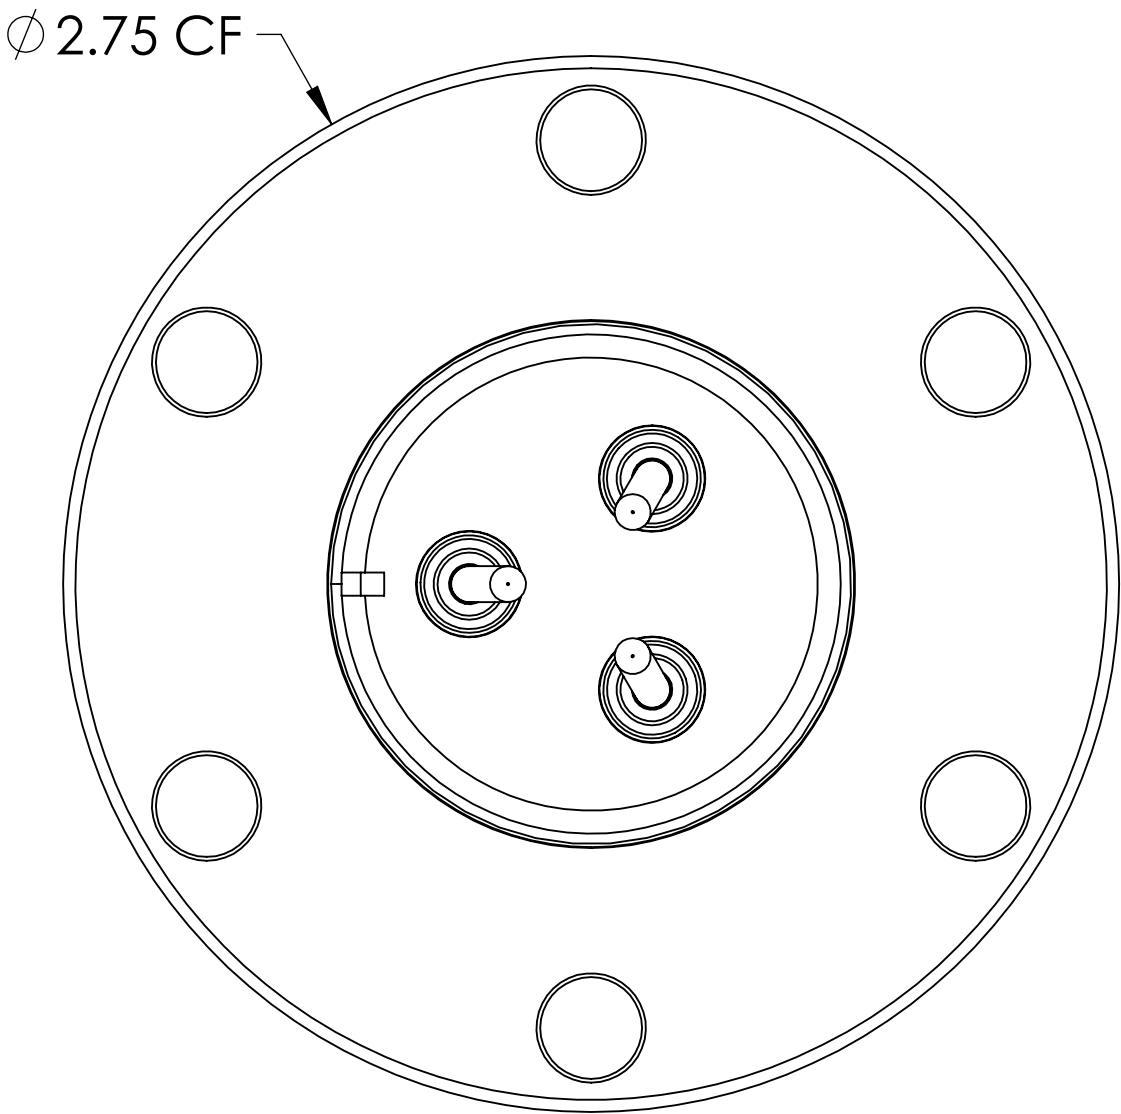

PART #	"A" DIM	CONDUCTOR MATERIAL	CURRENT RATING (PER PIN)
A0753-1-CF	.094	OFHC COPPER	23 AMPS
A0753-2-CF	.092	NICKEL 200	15 AMPS

- SPECIFICATIONS:
- 1. VOLTAGE: 1750 VOLTS DC
  - 2. CURRENT: SEE TABLE
  - 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
  - 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough, 3 Pins, 1750 Volts, w/ Air-side Connector, 2.75" Conflat Flange

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	WJ	9/11/2015	TITLE:
TWO PLACE DECIMAL ± .030		CHECKED		9/11/2015	
THREE PLACE DECIMAL ± .015		ENG APPR.	WJ	9/11/2015	
MATERIAL		THIRD ANGLE:		MULTIPIN, 3 PINS, 1750V, 275CF	
				DOWNLOADED FROM MPFPI.COM	
		APPLICATION		DWG. NO.	
		NEXT ASSY		USED ON	
FINISH		SURFACE FINISH:		REV	
PLATING		UNLESS OTHERWISE SPECIFIED:		A0753	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Friday, January 25, 2019 2:20:11 PM	