
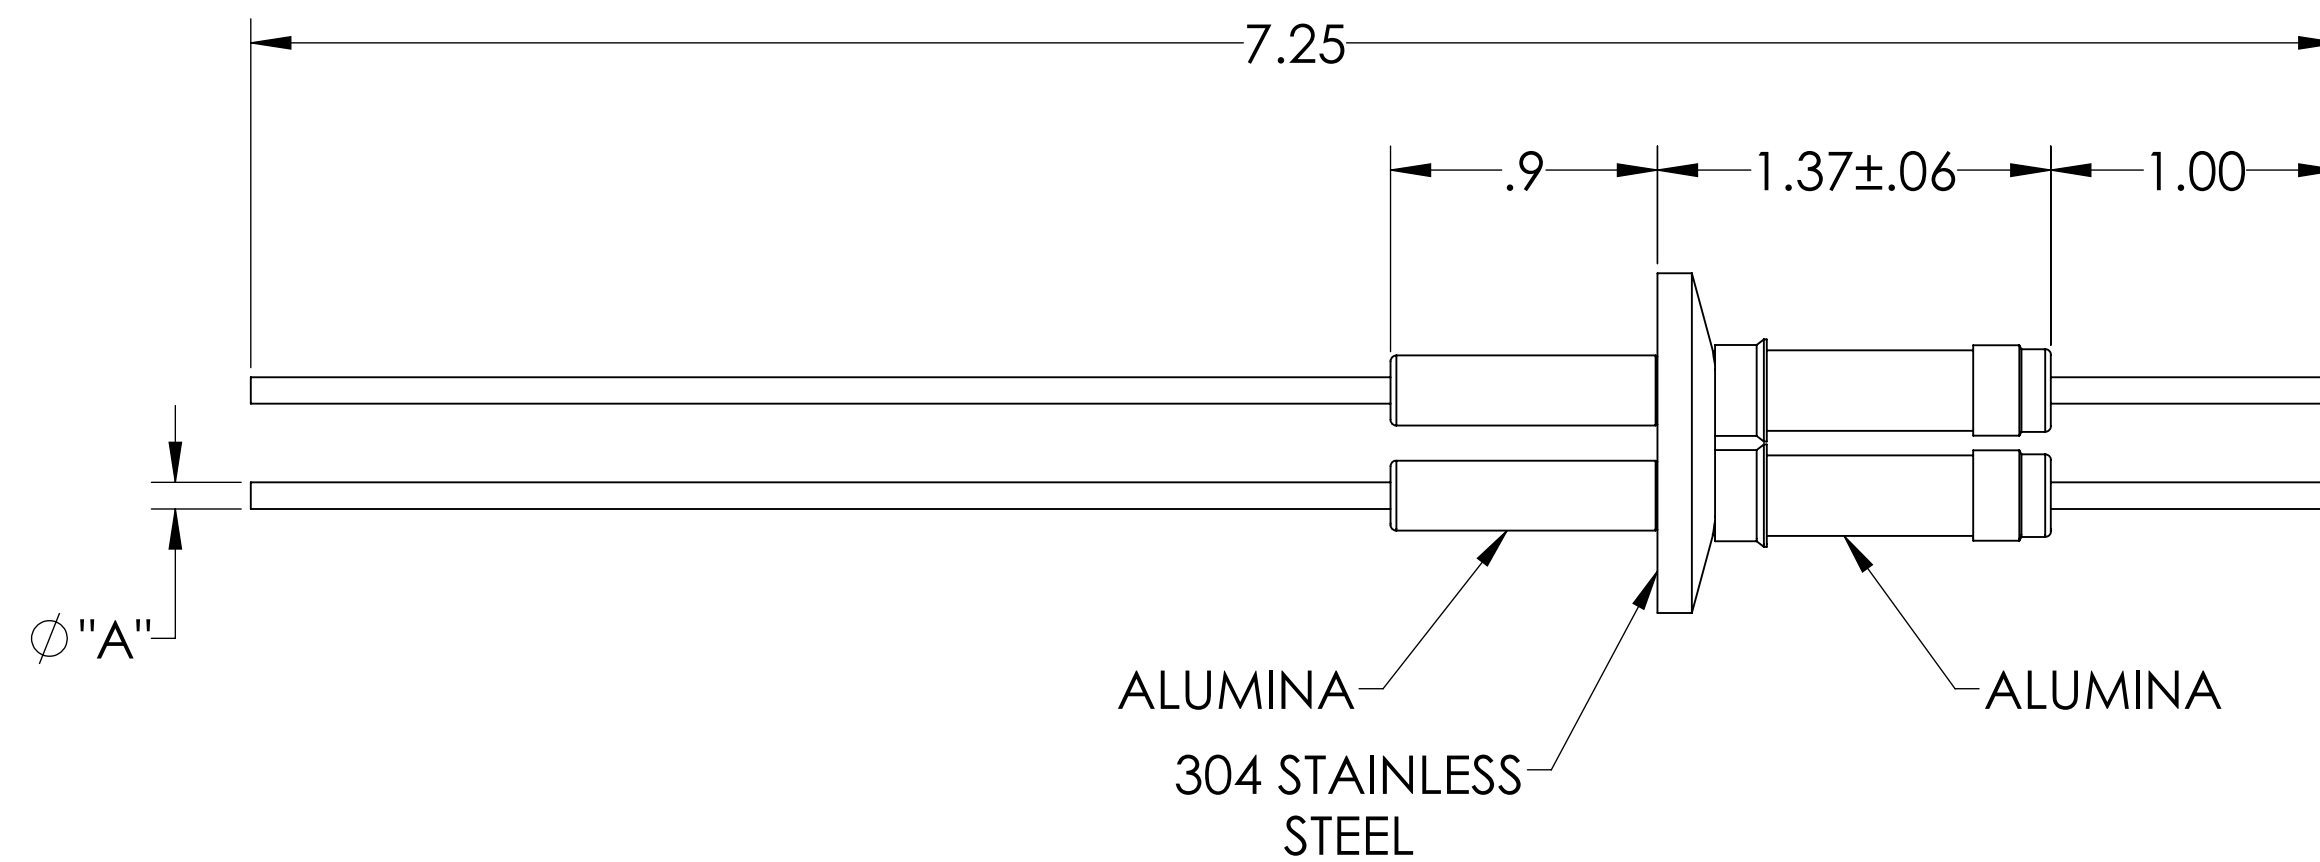
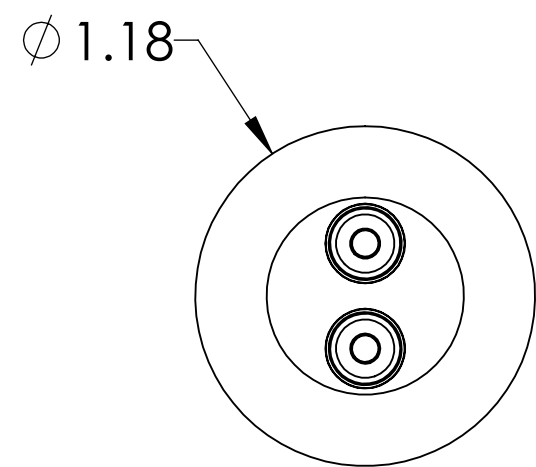


MPF PRODUCTS INC.

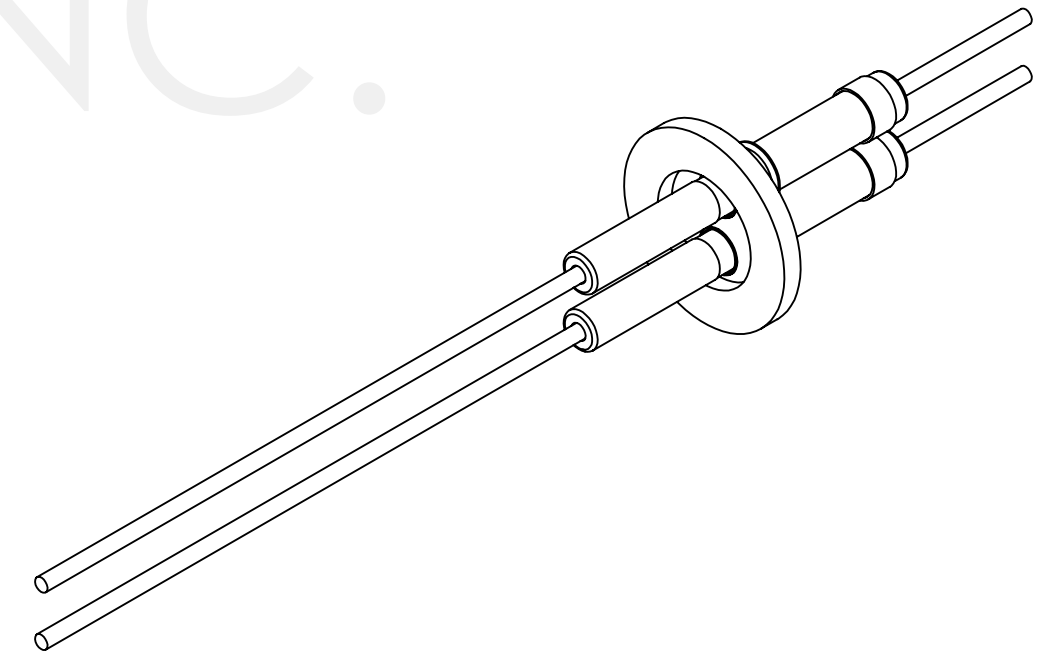

PART #	Ø "A"	CONDUCTOR MATERIAL	CURRENT RATING
A0781-1-QF	.092	NICKEL 200	15 AMPS
A0781-2-QF	.094	OFHC COPPER	50 AMPS
A0781-5-QF	.094	304 STN. STL.	3 AMPS

NOTE:

1. VOLTAGE: 14,000 VOLTS DC
2. CURRENT: SEE TABLE
3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 14 KV, 2 Pins, 1.18" QF/KF, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:	DRAWN	NAME	DATE
ANGULAR: MACH ± 1/2°	WJ	WJ	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED		9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ	9/11/2015
MATERIAL	THIRD ANGLE:		
FINISH	APPLICATION	TITLE: POWER FEEDTHROUGH, 14 KV, 2 PINS, 1.18" QF/KF	
PLATING	SURFACE FINISH:	DOWNLOADED FROM MPFPI.COM DWG. NO.	
	UNLESS OTHERWISE SPECIFIED:	A0781	
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	REV	
		Tuesday, January 22, 2019 10:57:03 AM	