


MPF PRODUCTS INC




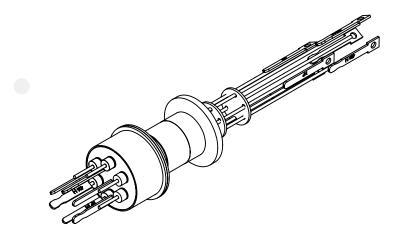



PART #	T/C TYPE
A0782-1-QF	K
A0782-2-QF	J
A0782-3-QF	E
A0782-4-QF	С

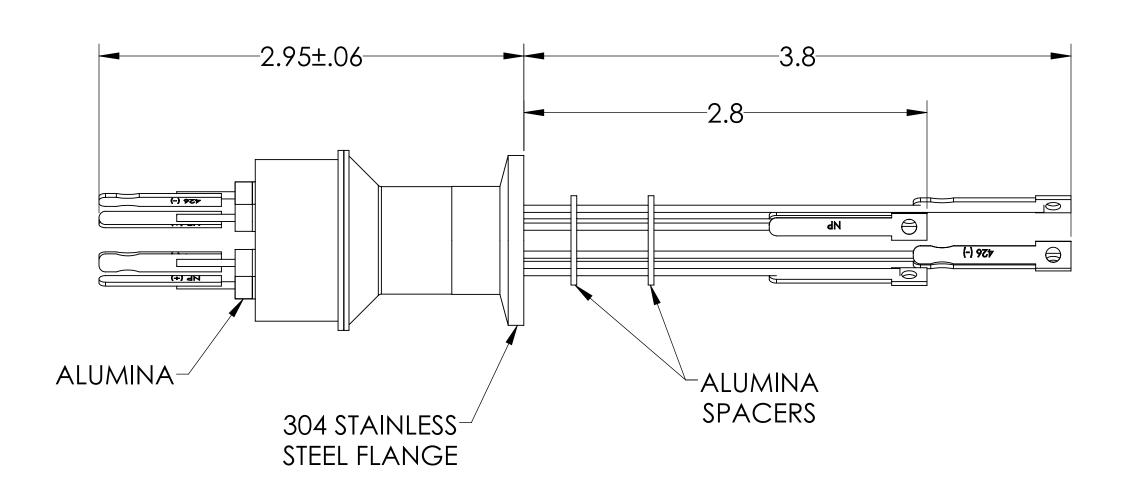



SPECIFICATIONS:

- 1. TEMPERATURE RATING: -100 TO 450°C
- 2. LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple Feedthrough, 3 Pairs, Miniature Connector, 1.18" QF/KF

UNLESS OTHERWISE SPECIFIED:	QUOTA	NOIT					
	N/A						
DIMENSIONS ARE IN INCHES		NAME	DATE		ADE DOODLIGTS II		
TOLERANCES:	DRAWN	WJ	9/11/2015	\sim	MPF PRODUCTS II	VC.	
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030	CHECKED		9/11/2015	TITL	E:		
	ENG APPR.	WJ	9/11/2015				
THREE PLACE DECIMAL ± .015	THIRD ANGLE:						
MATERIAL			THERMOCOUPLE, 3 PAIRS, CONNECTOR, 1.18" QF/KF				
	APPLICATION NEXT ASSY USED ON						
				DOV	WNLOADED FROM MPFPI.CO	Μ	
FINISH	SURFACE FINIS	SH:	OR BETTER	DWC	G. NO.	REV	
PLATING	UNLESS OTHERWISE SPECIFIED:			A0782			
I LATINO	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		F	Friday, February 8, 2019 8:31:22 AM			
WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED. SHEET 1 OF 1							