



MPF PRODUCTS INC

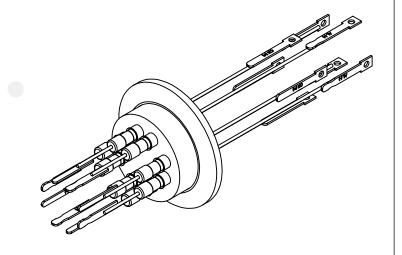


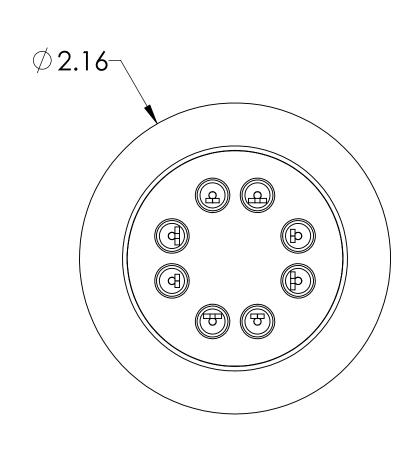

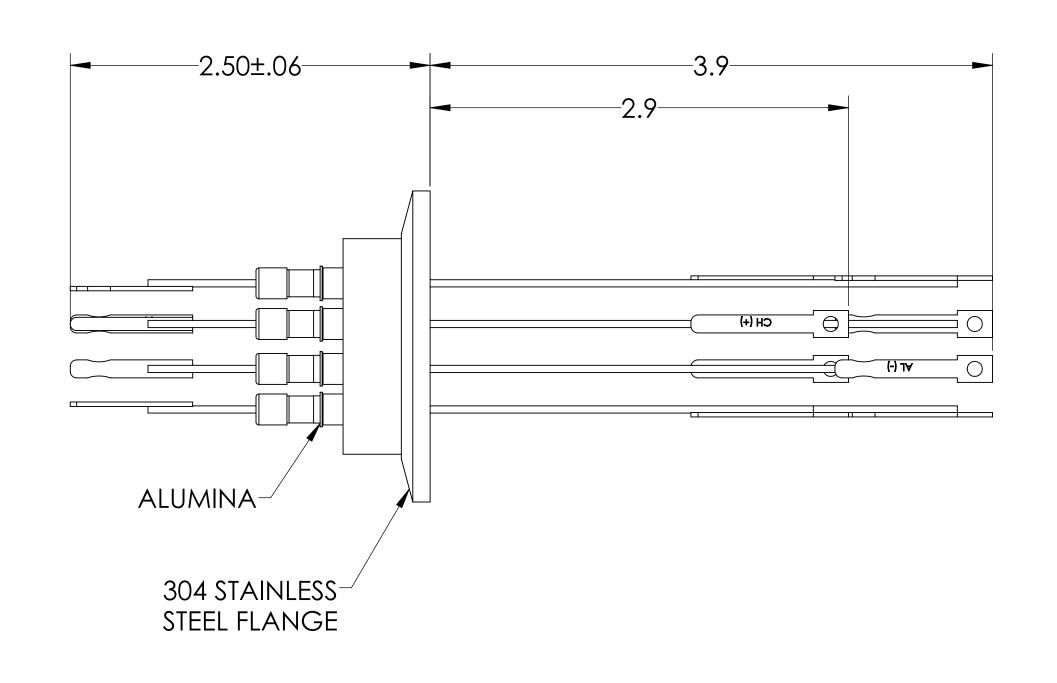

PART #	T/C TYPE
A0784-1-QF	С
A0784-2-QF	E
A0784-3-QF	J
A0784-4-QF	K





SPECIFICATIONS:

- 1. TEMPERATURE RATING: -100 TO 450°C
- 2. LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple Feedthrough, 4 Pairs, Miniature Connector, 2.16" QF/KF

UNLESS OTHERWISE SPECIFIED:	QUOTA	MOIT		N I / A					
	N/A								
DIMENSIONS ARE IN INCHES		NAME	DATE	l .	AADE DDODLIGTS INIC				
TOLERANCES:	DRAWN	WJ	9/11/2015	MPF PRODUCTS INC		VC.			
NICHII ADAAACH . 170°	CHECKED		9/11/2015	TITL	E:				
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030	ENG APPR.	WJ	9/11/2015						
THREE PLACE DECIMAL ± .015	THIRD AND	E:							
MATERIAL			THERMOCOUPLE, 4 PAIRS, CONNECTOR, 2.16" QF/KF						
	APPLICATION NEXT ASSY USED ON								
				DOV	WNLOADED FROM MPFPI.CC	Μ			
FINISH	SURFACE FINIS	SH:	OR BETTER	DWC	G. NO.	REV			
PLATING	UNLESS OTHERWISE SPECIFIED:		A0784						
. 5 3	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Friday, February 8, 2019 8:28:56 AM						
E WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED. SHEET 1 OF 1									