


## MPF PRODUCTS INC.





PART #	T/C TYPE
A0798-1-CF	K
A0798-2-CF	С
A0798-3-CF	J
A0798-4-CF	Е

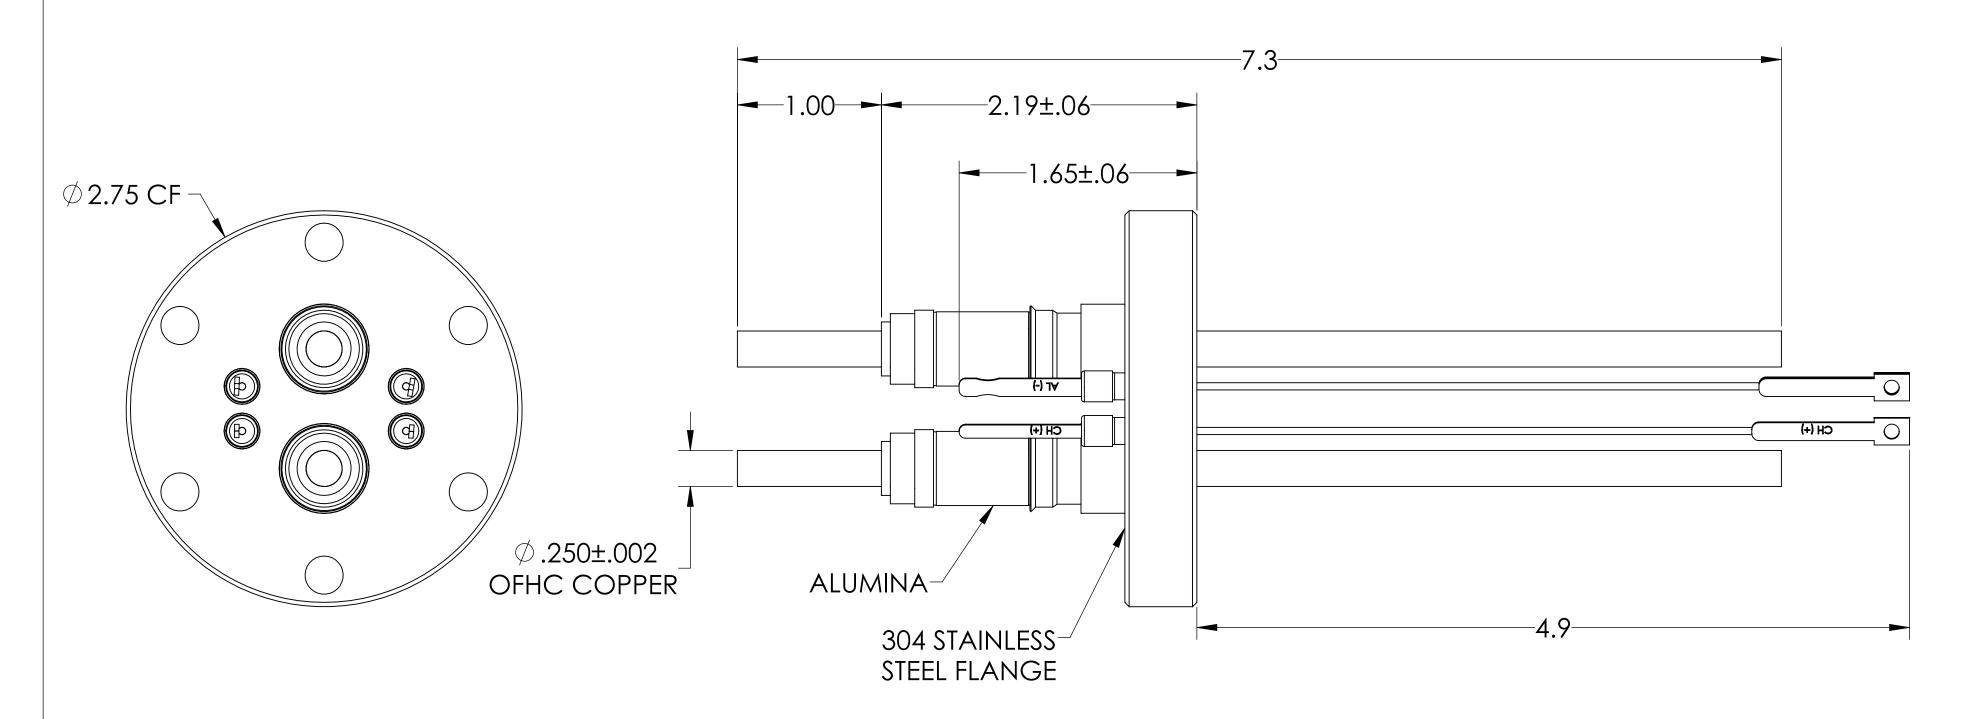



## SPECIFICATIONS:

1. VOLTAGE: 5000 VOLTS DC

2. CURRENT: 180 AMPS

3. TEMPERATURE RATING: -100 TO 450°C 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple-Power Feedthrough, 2 Pairs, w/ Miniature TC Connector, 5000 Volts, 180 Amps, 2 Pins, 2.75" Conflat Flange

UNLESS OTHERWISE SPECIFIED:	QUOTATION #								
5.1.15.10.10.10.15.15.11.11.10.150	N/A								
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE		MPF PRODUCTS INC.				
TOLERANCES.	DRAWN	W٦	9/11/2015	l IV					
ANICHI AD AAACH 170°	CHECKED		9/11/2015	TITL	_E:				
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030	ENG APPR.	WJ	9/11/2015						
THREE PLACE DECIMAL ± .015	THIRD ANGLE:		<b> </b> _	THERMOCOUPLE-POWER, 2 PAIRS, 5000V, 180A, 2 PINS, 275CF					
			l						
MATERIAL									
	APPLICATION		]	211113, 27301					
	NEXT ASSY		USED ON						
				DOV	WNLOADED FROM MPFPI.CC	M			
FINISH	SURFACE FINIS	SH:	OR BETTER	DWC	G. NO.	REV			
	UNLESS OTHERWISE SPECIFIED:		-	A0798					
PLATING	ALL DIAMETERS CONCENTRIC WITHIN .005.		511 11 0 0010 0 51 51 51						
	REMOVE ALL BURRS AND SHARP EDGES			Friday, November 8, 2019 3:51:51 PM					
E WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED. SHEET 1 OF 1									