
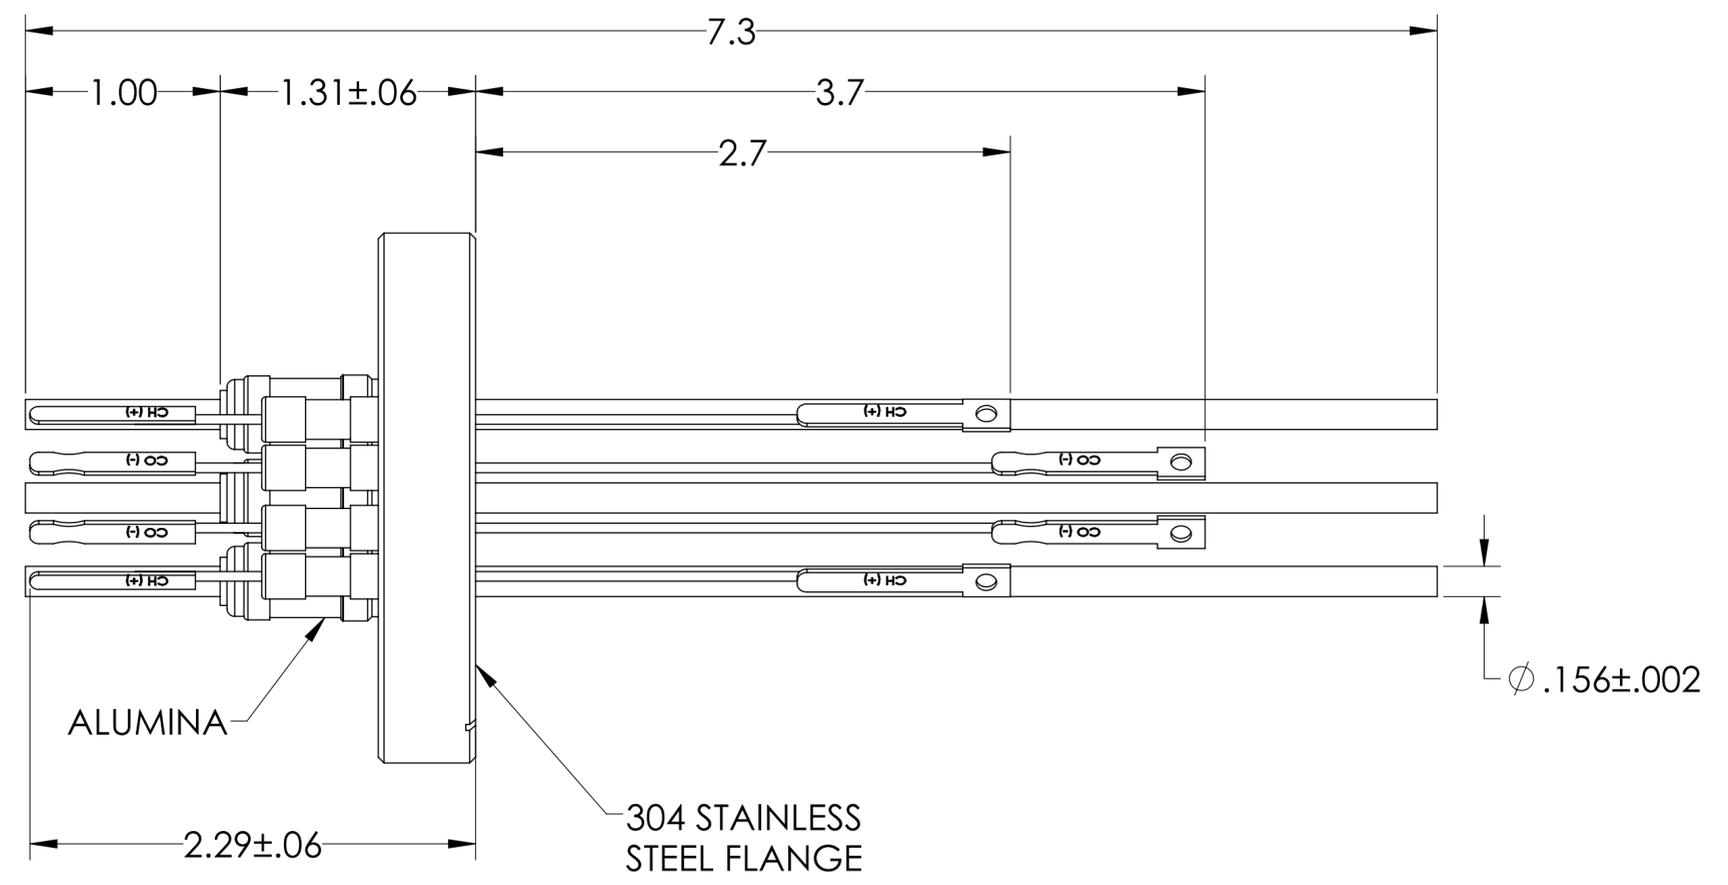
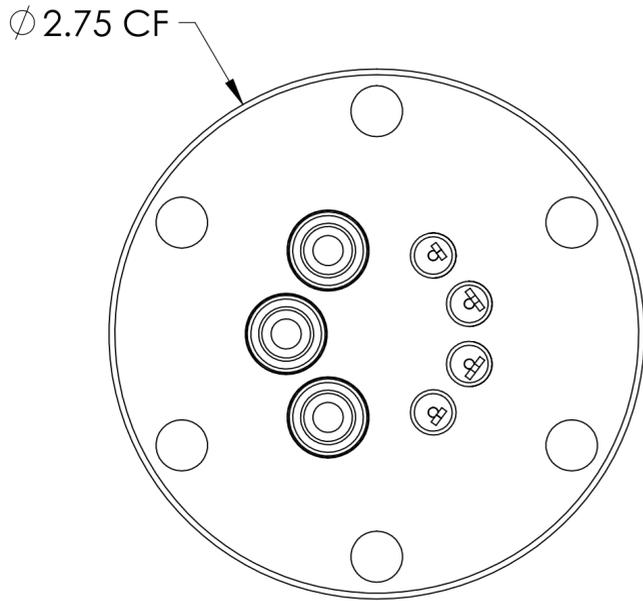


MPF PRODUCTS INC.

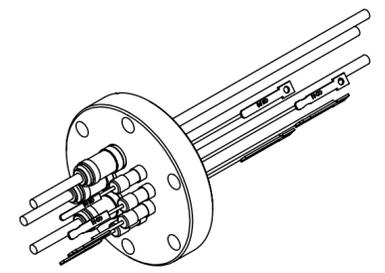


PART #	T/C TYPE
A0800-1-CF	J
A0800-2-CF	K
A0800-3-CF	C
A0800-4-CF	E

SPECIFICATIONS:

1. VOLTAGE: 5000 VOLTS DC
2. CURRENT: 60 AMPS
3. TEMPERATURE RATING: -100 TO 450°C
4. LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple-Power Feedthrough, 2 Pairs , w/ Miniature TC Connector, 5000 Volts, 60 Amps, 3 Pins, 2.75" Conflat Flange

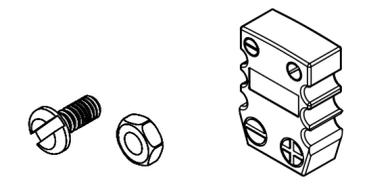

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	NAME	DATE	MPF PRODUCTS INC. TITLE: THERMOCOUPLE-POWER, 2 PAIRS, 5000V, 60A, 2 PINS, 275CF
ANGULAR: MACH ± 1/2°		WJ	WJ	9/11/2015	
TWO PLACE DECIMAL ± .030		CHECKED	WJ	9/11/2015	
THREE PLACE DECIMAL ± .015		ENG APPR.	WJ	9/11/2015	
MATERIAL		THIRD ANGLE:			
		APPLICATION			
		NEXT ASSY	USED ON		
FINISH		SURFACE FINISH: 63/ OR BETTER			DOWNLOADED FROM MPFPI.COM
PLATING		UNLESS OTHERWISE SPECIFIED:			DWG. NO. A0800
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			REV
		Friday, February 8, 2019 9:38:10 AM			