
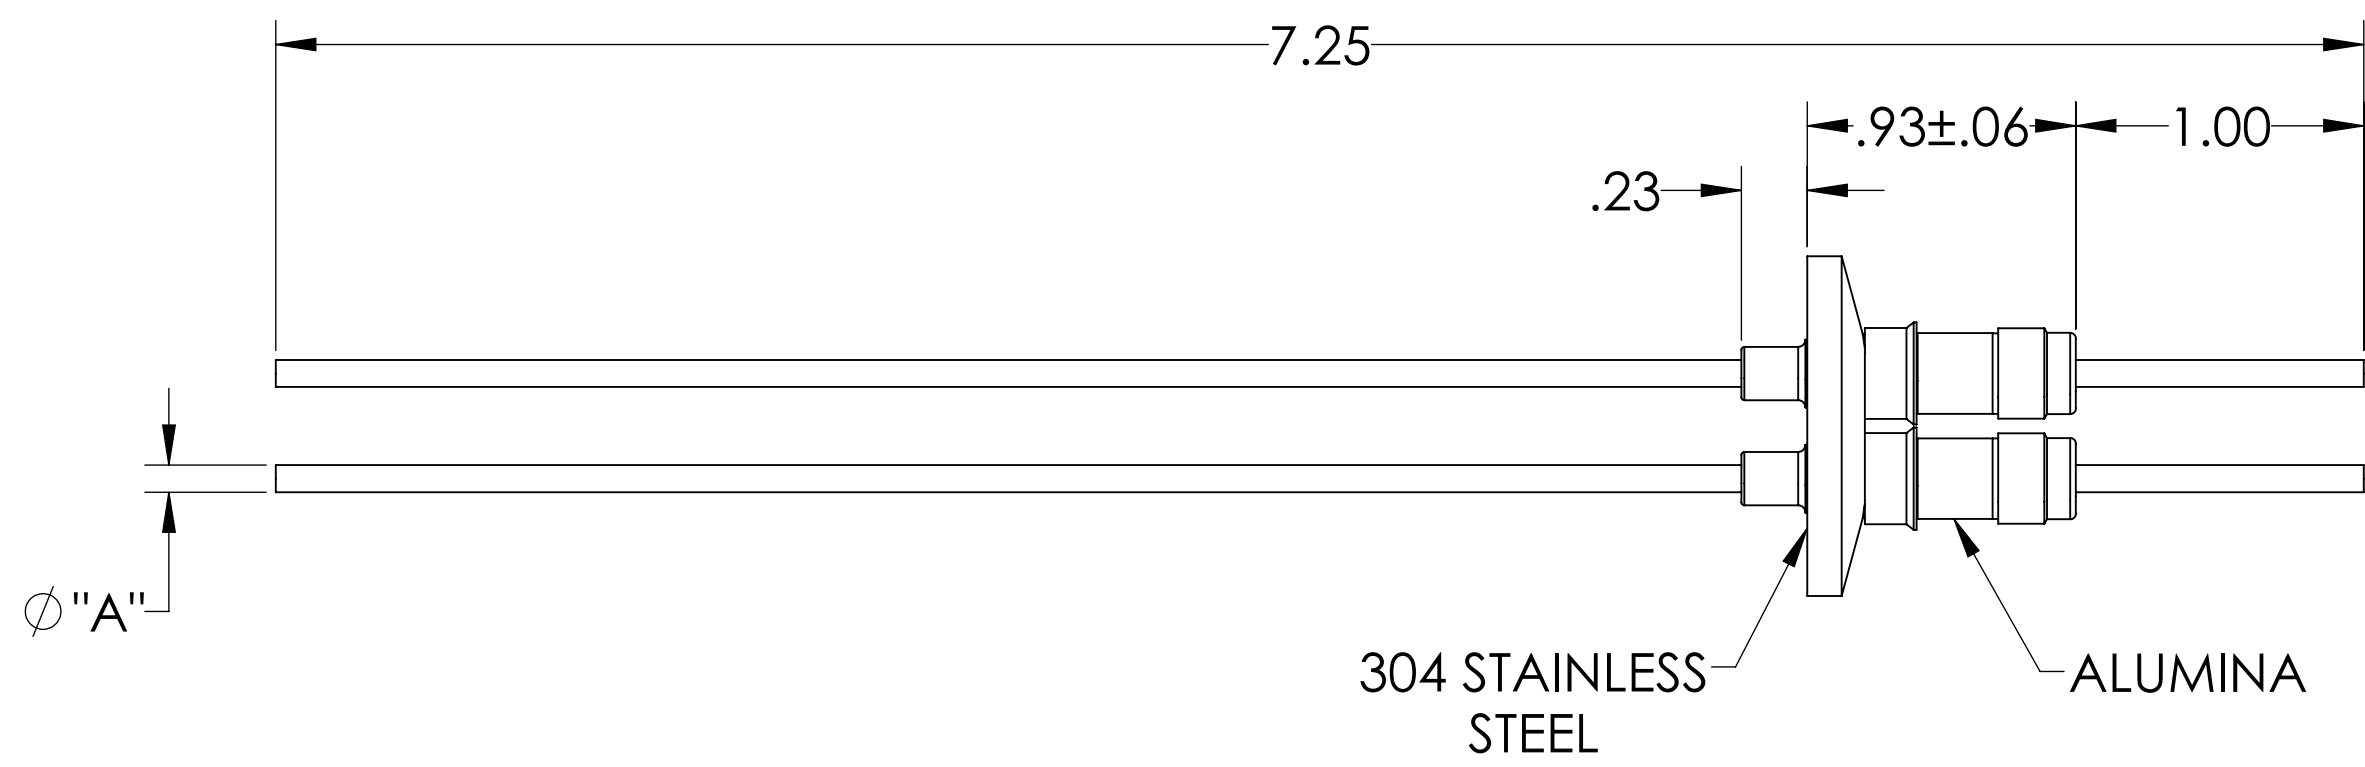
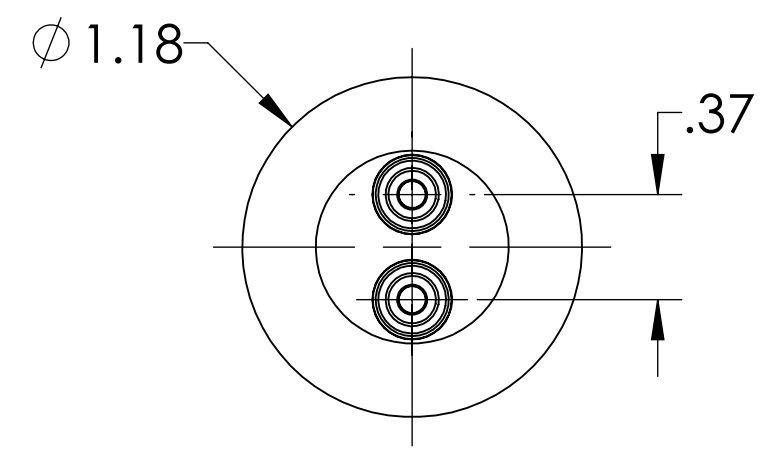


MPF PRODUCTS INC.

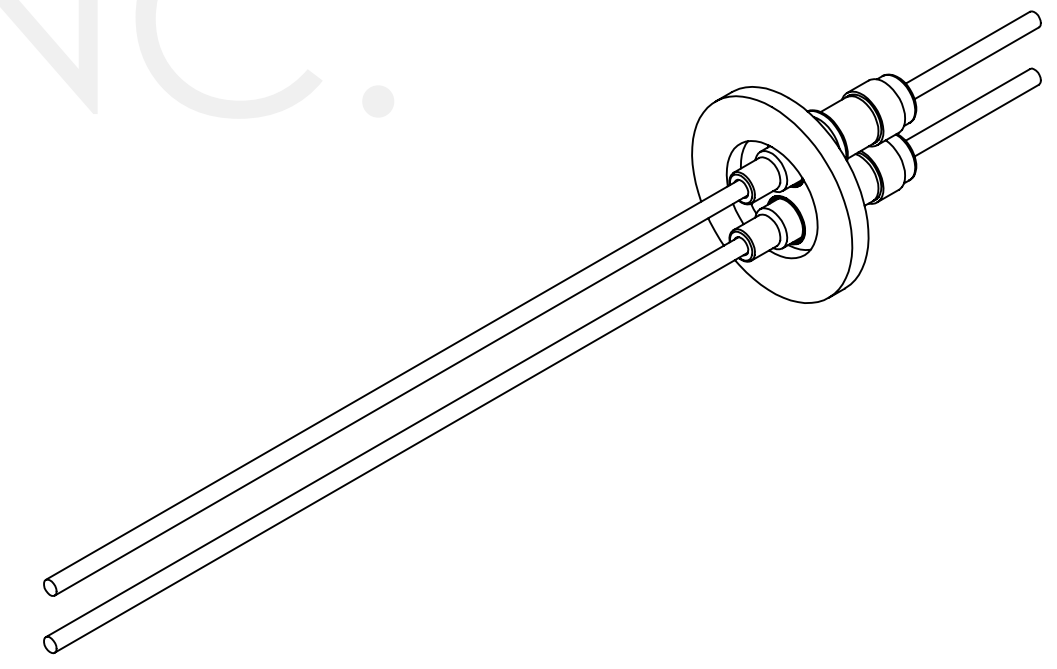

PART #	Ø "A"	CONDUCTOR MATERIAL	CURRENT RATING
A0818-1-QF	.092	NICKEL 200	15 AMPS
A0818-2-QF	.094	OFHC COPPER	50 AMPS
A0818-7-QF	.094	MOLYBDENUM	28 AMPS

- NOTE:
- VOLTAGE: 5,000 VOLTS DC
 - CURRENT: SEE TABLE
 - TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 5000 Volts, 2 Pins, 1.18" QF/KF, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015
MATERIAL	THIRD ANGLE:	
FINISH	APPLICATION	
PLATING	NEXT ASSY USED ON	
	SURFACE FINISH:	63/ OR BETTER
	UNLESS OTHERWISE SPECIFIED:	
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES	
	TITLE: POWER FEEDTHROUGH, 5000 VOLTS, 2 PINS, 1.18" QF/KF	
	DWG. NO. A0818	
	REV	
	Friday, December 7, 2018 2:17:29 PM	