


MPF PRODUCTS INC.

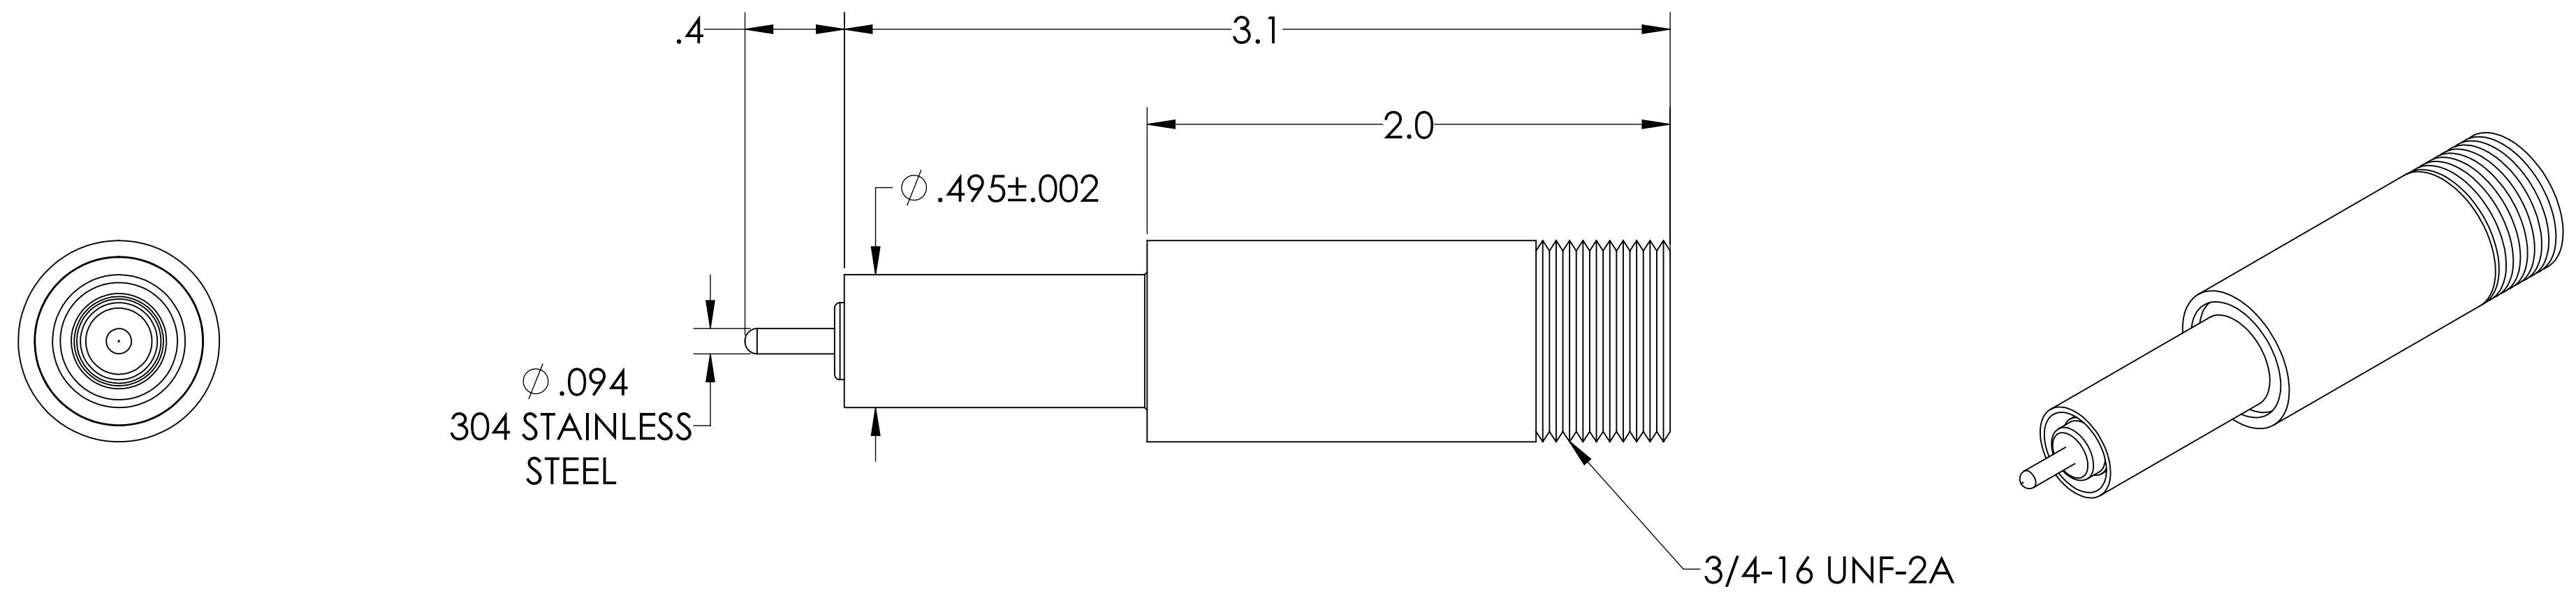

PART #	AIRSIDE CONNECTOR INCLUDED
A0836-1-W	YES
A0836-2-W	NO

NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 7500 VOLTS DC
3. CURRENT: 3 AMP
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), -200 TO 300°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

SHV-B (Bakeable) Coaxial Feedthrough, 1 Pin, Grounded Shield, 0.622" Dia SS Weld Adapter, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH ± 1/2°	WJ	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015
MATERIAL	THIRD ANGLE:	
FINISH	APPLICATION	
PLATING	NEXT ASSY	USED ON
	SURFACE FINISH:	63/ OR BETTER
	UNLESS OTHERWISE SPECIFIED:	
	ALL DIAMETERS CONCENTRIC WITHIN .005.	REMOVE ALL BURRS AND SHARP EDGES
	TITLE:	SHV-B COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, 0.622" DIA SS WELD ADAPTER
	DOWNLOADED FROM MPFPI.COM	
	DWG. NO.	A0836
	REV	
	Tuesday, October 9, 2018 1:41:43 PM	