


MPF PRODUCTS INC.

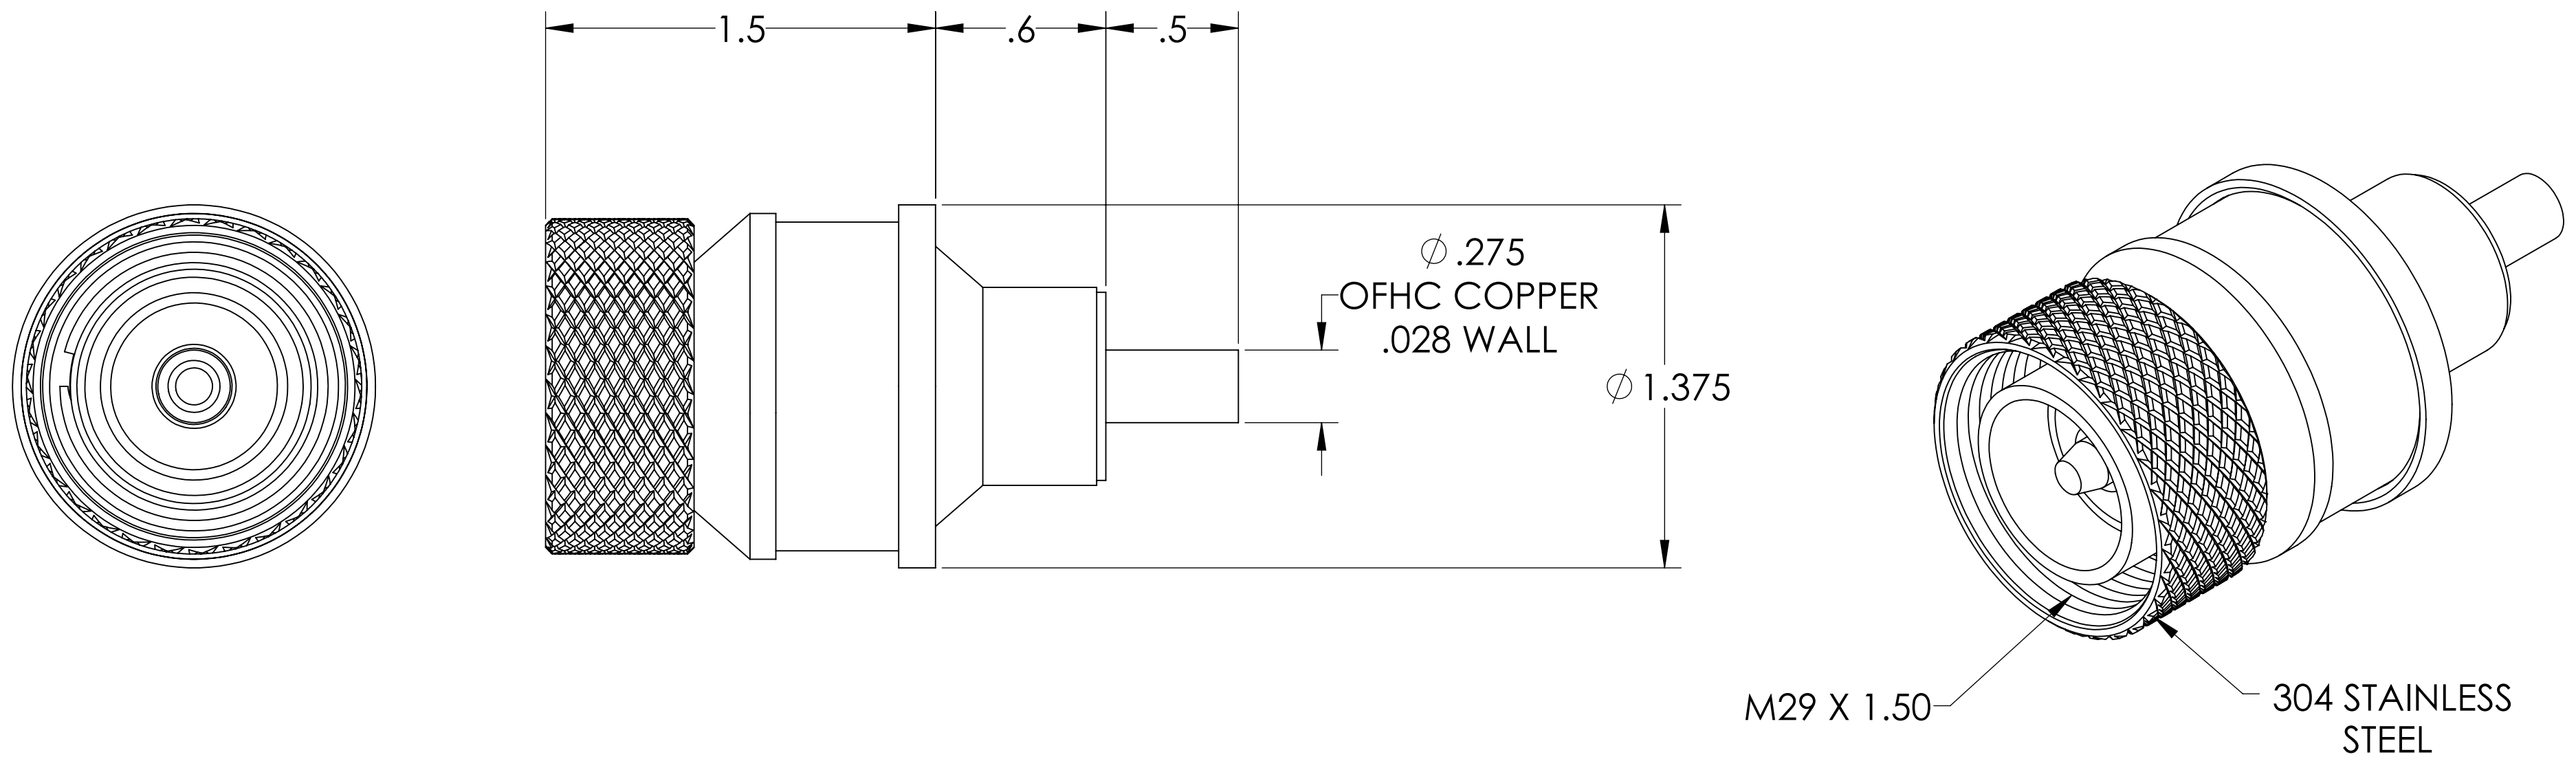

NOTE:

1. VOLTAGE: 2700 VRMS
2. CURRENT: N/A
3. TEMPERATURE RATING: -100 TO 450°C

7/16" DIN Coaxial Feedthrough, 50ohm, DC to 7.5 GHz, 2700 VRMS, 100 Watts 0.275" Copper Conductor, 1.375" Weld Adapter.

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH $\pm 1/2^\circ$		DRAWN	9/11/2015		
TWO PLACE DECIMAL $\pm .030$		CHECKED	9/11/2015		
THREE PLACE DECIMAL $\pm .015$		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		7/16" DIN COAXIAL FEEDTHROUGH 2700 VRMS DC TO 7.5 GHZ, 1 PIN, WELDABLE	
FINISH		APPLICATION			
PLATING		NEXT ASSY	USED ON		
		SURFACE FINISH: $\sqrt{63}$ OR BETTER			
		UNLESS OTHERWISE SPECIFIED:		DWG. NO. A10022-1	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV	
		Friday, July 19, 2019 3:43:42 PM		DOWNLOADED FROM MPFPI.COM	