
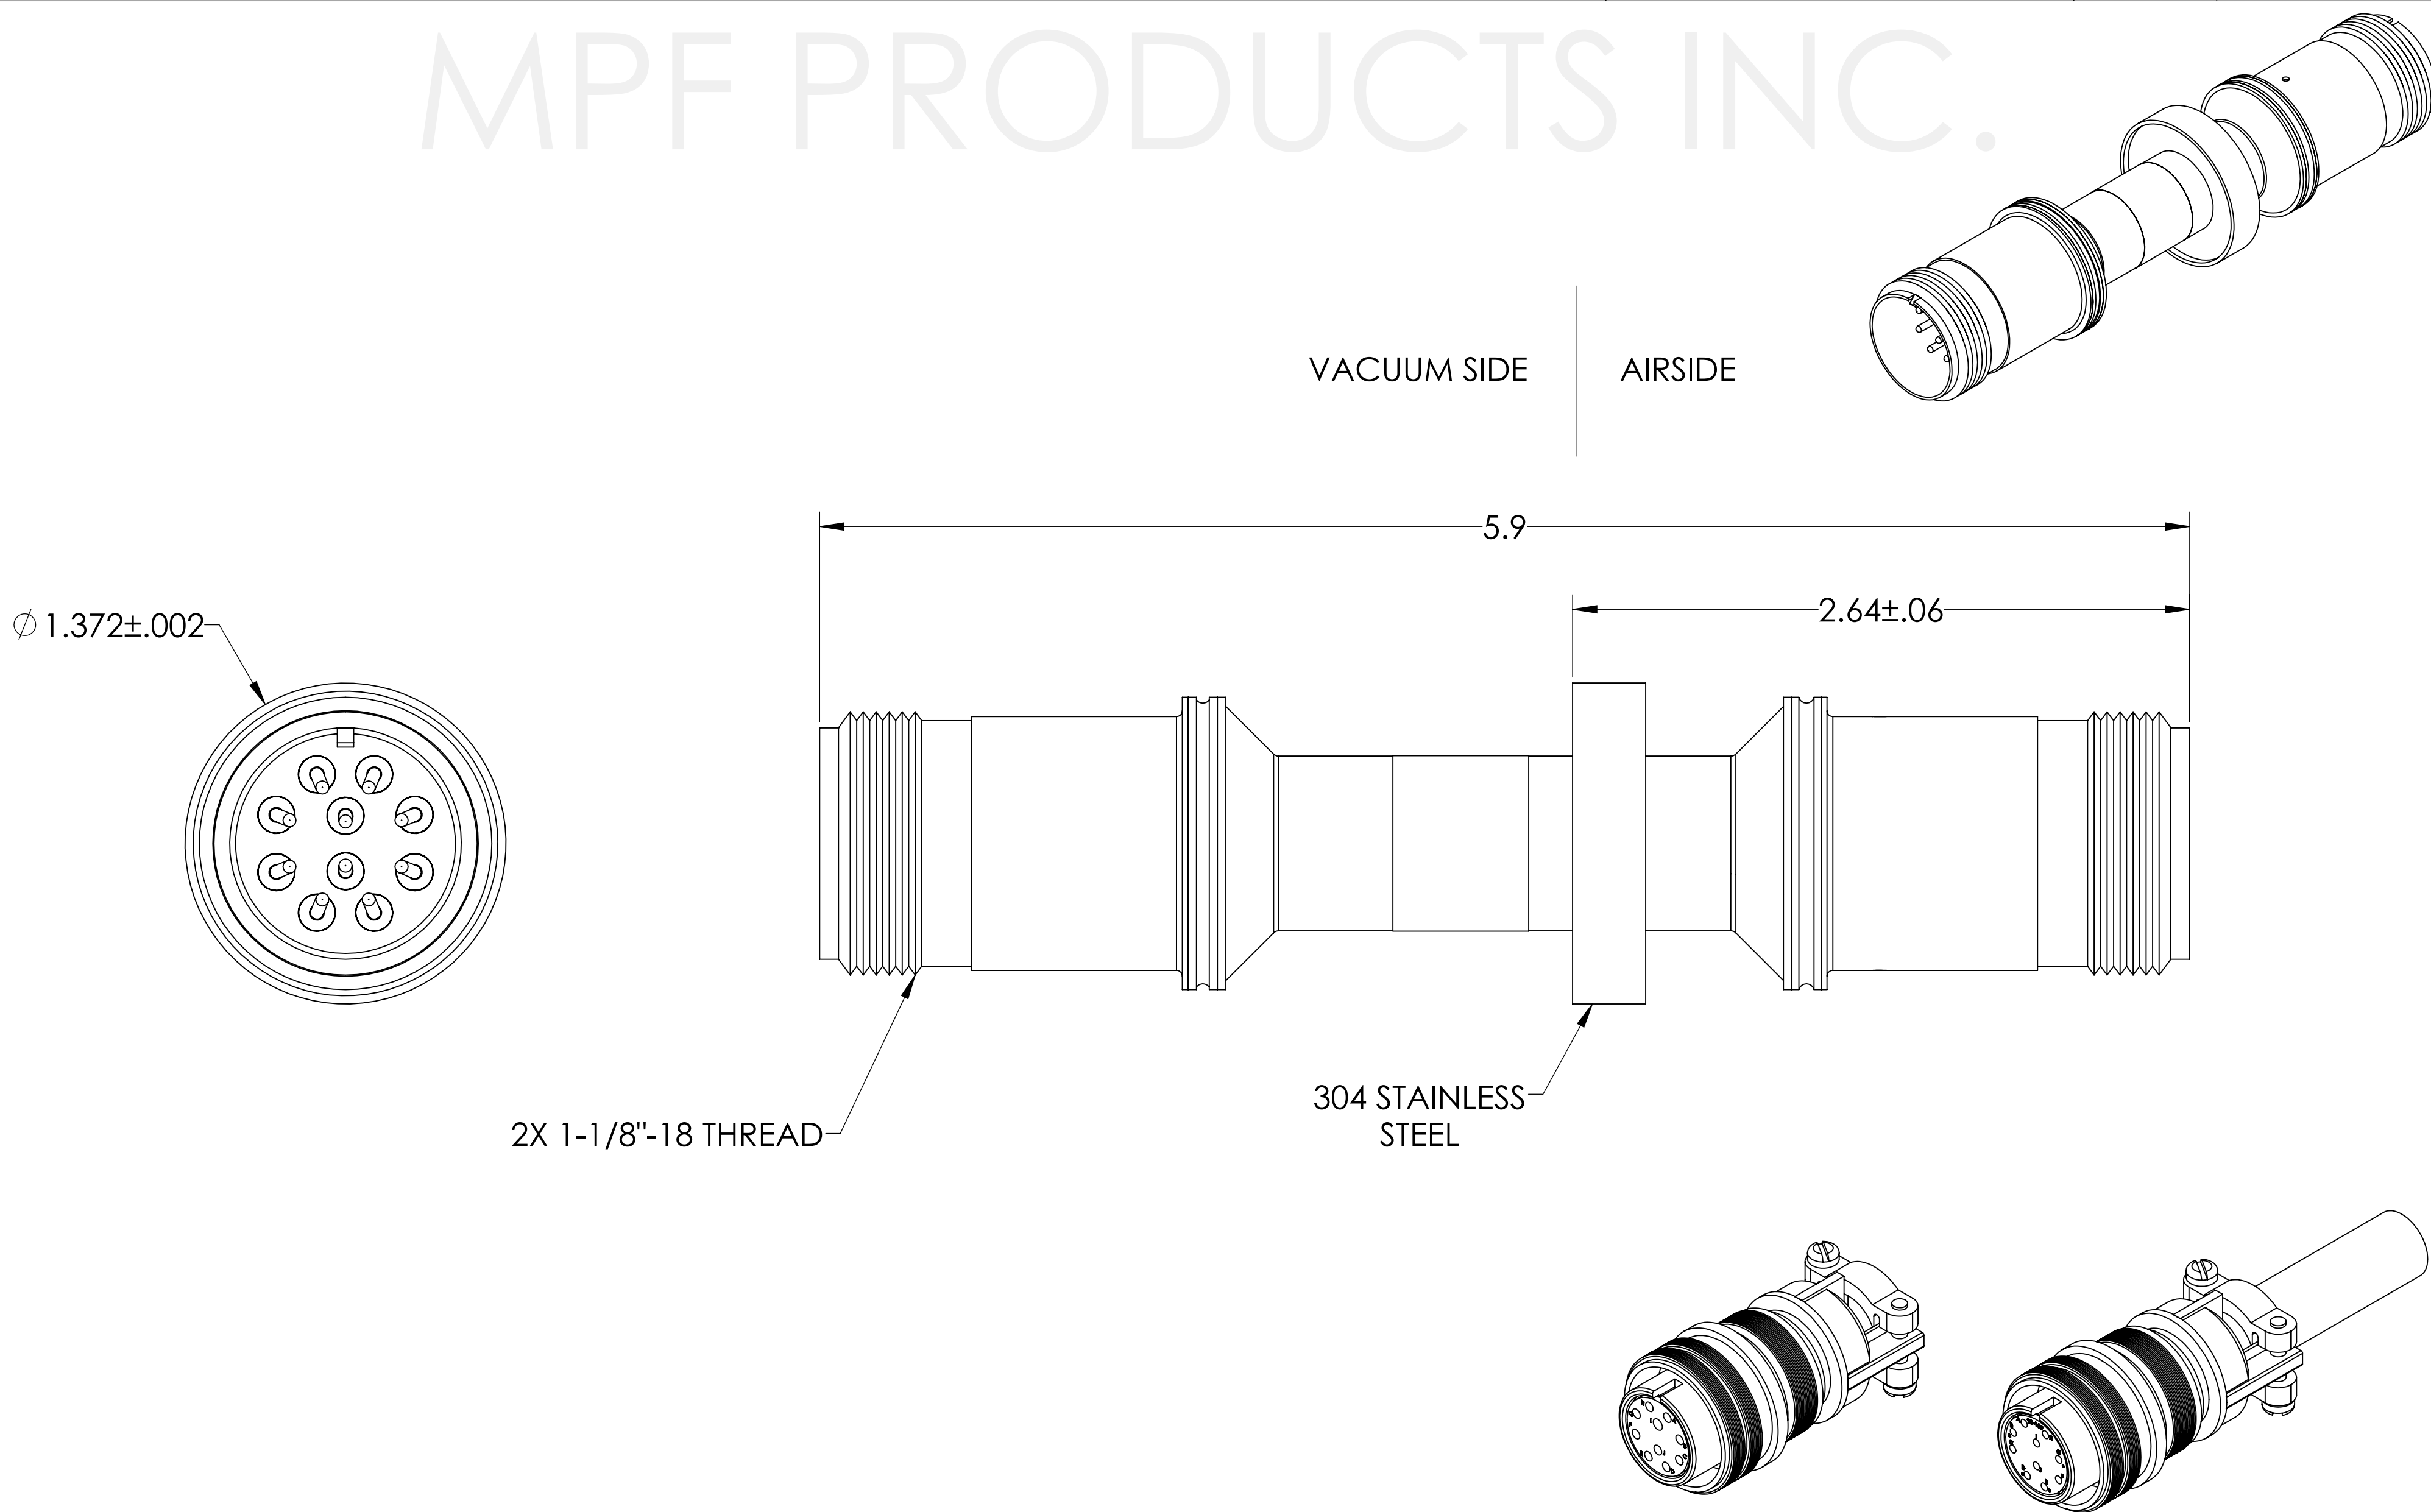



MPF PRODUCTS INC.



- SPECIFICATIONS:
- 1. VOLTAGE: 700 VOLTS DC
  - 2. CURRENT: 10 AMPS PER PIN, 50 AMPS FULL LOAD
  - 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
  - 4. VACUUM SIDE CONNECTOR RATED FOR -100 TO 350 °C
  - 5. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Multipin Feedthrough, 10 Pins, 700 Volts, 10 Amps per Pin, Double-Ended w/ Air & Vacuum-side Connectors, 1.372" Weld Adapter

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:  ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL     ± .030 THREE PLACE DECIMAL   ± .015			NAME	DATE	MPF PRODUCTS INC.
		DRAWN	WJ	9/11/2015	
		CHECKED		9/11/2015	
		ENG APPR.	WJ	9/11/2015	
		THIRD ANGLE:			
MATERIAL					TITLE:  MULTIPIN, 10 PINS, 700V, 10 A, DOUBLE ENDED, 1.372" WELD ADAPTER
		APPLICATION			
		NEXT ASSY		USED ON	
FINISH		SURFACE FINISH:		DOWNLOADED FROM MPFPI.COM	
		 63 OR BETTER		DWG. NO.	
PLATING		UNLESS OTHERWISE SPECIFIED:		REV	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		A1069-1-W	
				Thursday, February 7, 2019 8:35:16 AM	