



MPF PRODUCTS INC

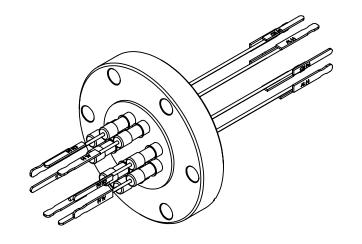


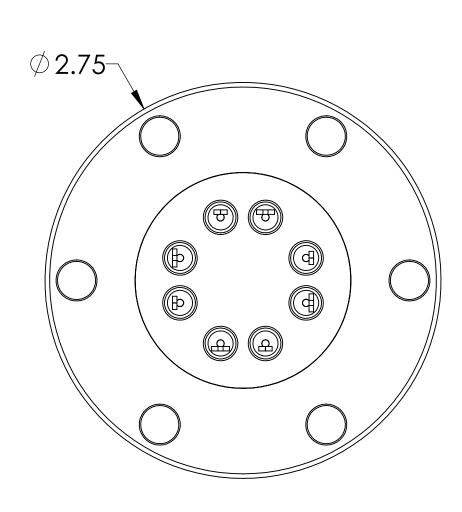

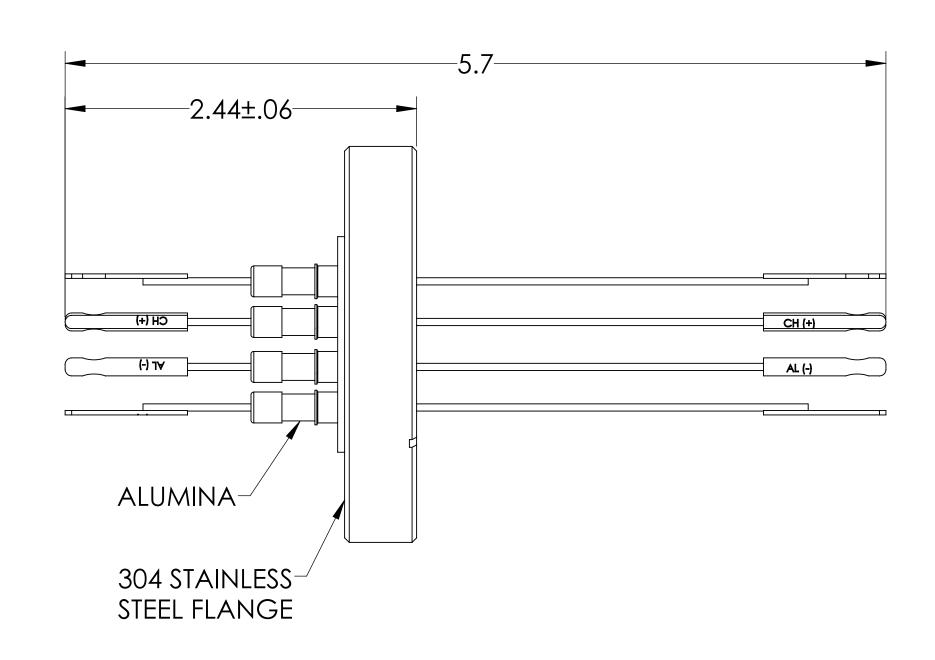

AIR-SIDE CONNECTOR VACUUM-SIDE CONNECTOR





SHEET 1 OF 1

SPECIFICATIONS:

- 1. TEMPERATURE RATING: -100 TO 450°C
- 2. LEAK RATE < 1X10-9 ATM CC/SEC HE

Thermocouple Feedthrough, Type K, 4 Pairs, Air & Vacuum-side Miniature Connector, 2.75" Conflat Flange

UNLESS OTHERWISE SPECIFIED:	QUOTATION #				
	N/A				
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	AADE DDODLIGTS IN C	
	DRAWN	WJ	9/11/2015	MPF PRODUCTS INC	•
ANGULAR: MACH±1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015	CHECKED		9/11/2015	TITLE:	
	ENG APPR.	WJ	9/11/2015		
	THIRD ANGLE:			THERMOCOURLE TYPE K	
				THERMOCOUPLE, TYPE K,	
MATERIAL	APPLICATION			4 PAIRS, CONNECTOR, 275CF	
			NC	27301	
	NEXT ASSY		USED ON		
				DOWNLOADED FROM MPFPI.COM	
FINISH	SURFACE FINIS	SH:	OR BETTER	- DWG. NO. REV	/
	LINII ESS OTHEDWISE SPECIFIED:			A10766-1-CF	
PLATING	UNLESS OTHERWISE SPECIFIED:				
. 2	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			Friday, February 8, 2019 1:33:49 PM	