


MPF PRODUCTS INC.

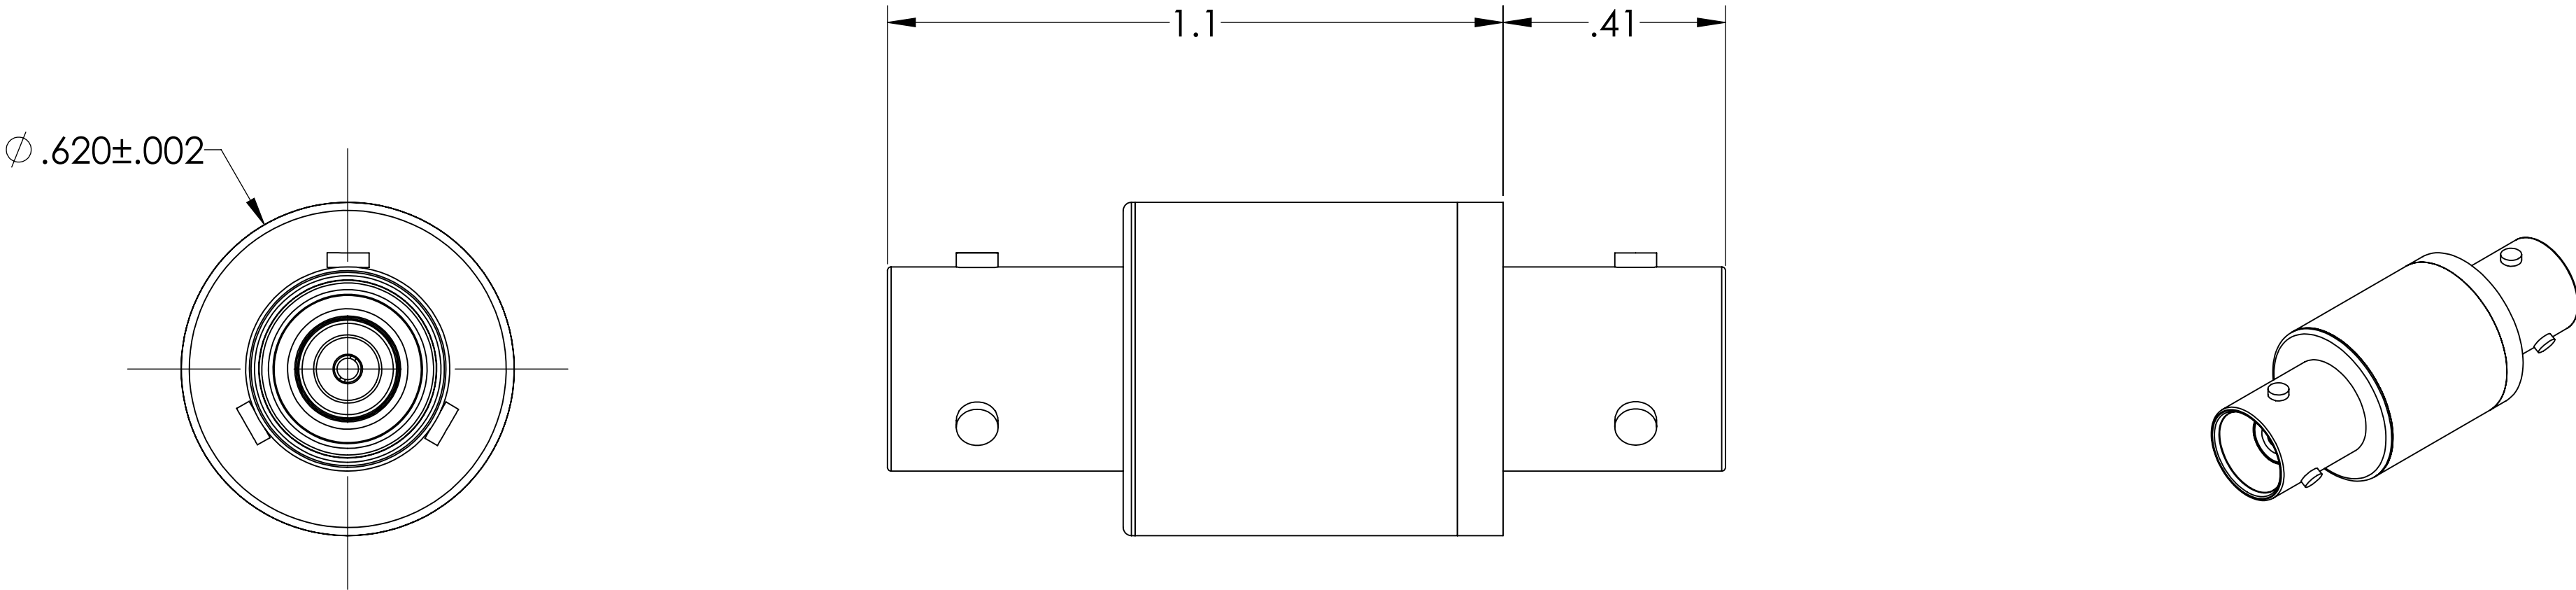


PART #	AIRSIDE CONNECTOR INCLUDED
A11127-1-W	YES
A11127-2-W	NO

- NOTE:
- 1. SHIELD: GROUNDED
 - 2. VOLTAGE: 5000 VOLTS DC
 - 3. CURRENT: 3 AMPS
 - 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
 - 5. IMPEDANCE: NON-CONSTANT

Triaxial Coaxial Feedthrough, 1 Pin, Grounded Shield, Double Ended, 0.620" Dia SS Weld Adapter, UHV Compatible



UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC.
		DRAWN	WJ	9/11/2015	
		CHECKED		9/11/2015	
		ENG APPR.	WJ	9/11/2015	
MATERIAL		THIRD ANGLE:			TITLE: TRIAXIAL COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, DOUBLE ENDED, 0.620" DIA SS WELD ADAPTER
					
		APPLICATION			
		NEXT ASSY			
FINISH		SURFACE FINISH:		DOWNLOADED FROM MPFPI.COM	
		63 OR BETTER		DWG. NO.	
PLATING		UNLESS OTHERWISE SPECIFIED:			A11127
ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			REV		
Monday, April 8, 2019 8:58:24 AM					