



MPF PRODUCTS IN

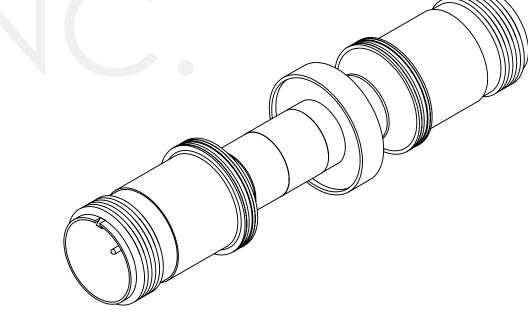

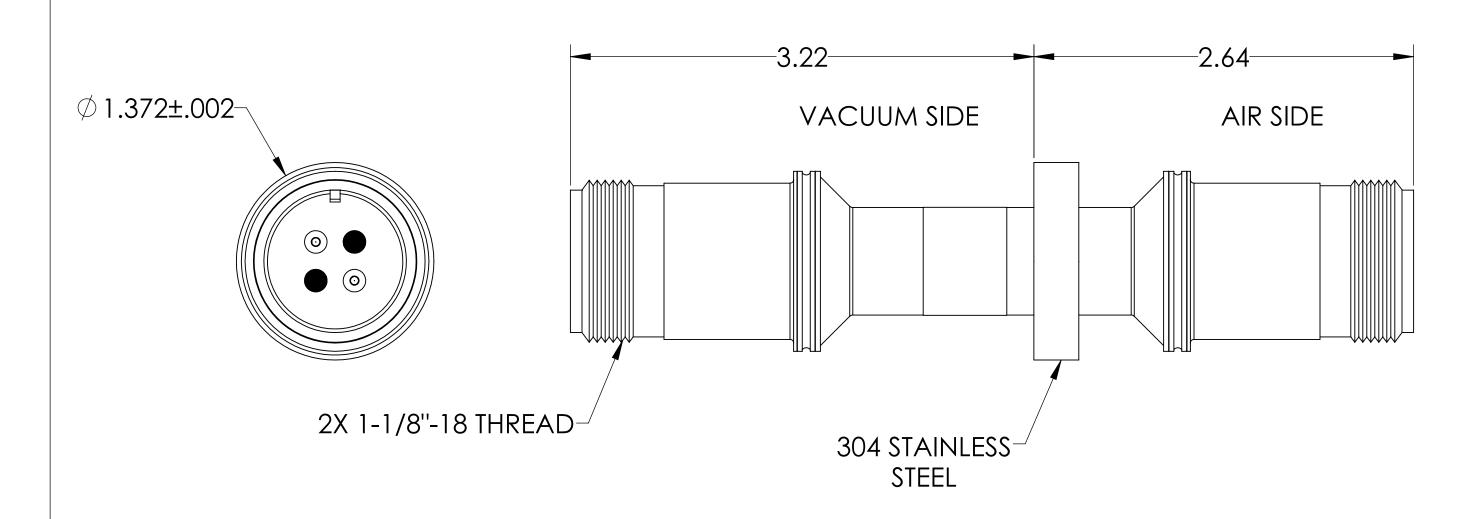

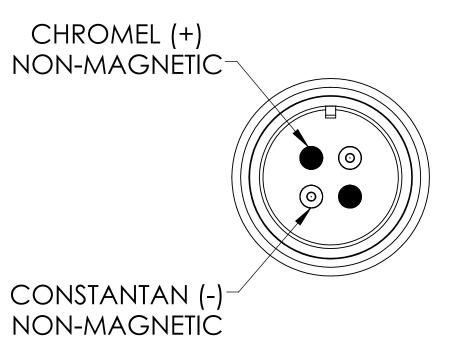

AIR-SIDE CONNECTOR VACUUM-SIDE CONNECTOR





SPECIFICATIONS:

- 1. TEMPERATURE RATING: -100 TO 450°C
- 2. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Thermocouple Feedthrough, Type E, 2 Pairs, Double-Ended, w/ Air & Vacuum-side Connectors, 1.37" Dia Stainless Steel Weld Adpater

UNLESS OTHERWISE SPECIFIED:	QUOTA	MOIT		N/A				
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME DATE							
	DRAWN	WJ	9/11/2015	MPF PRODUCTS INC.				INC.
ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015	CHECKED		9/11/2015	TITL	E:			
	ENG APPR.	WJ	9/11/2015					
	THIRD ANGLE:			THERMOCOUPLE, TYPE E, 2 PAIRS, MS CONNECTOR, DOUBLE ENDED, 1.372" WELD ADAPTER				
LAATEDIAL	APPLICATION NEXT ASSY USED ON							
MATERIAL								
	NEXTYGOT		0020 011	DOV	VNLO	ADED FRC	M MPFPI.C	MC
FINISH	SURFACE FINIS	SH:	OR BETTER	DWC	G. NO			REV
DIATING	UNLESS OTHERWISE SPECIFIED:				A1149-1-W			
PLATING	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			F	Friday, February 8, 2019 10:55:50 AM			M
E WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED. SHEET 1 OF 1								