


## MPF PRODUCTS INC.




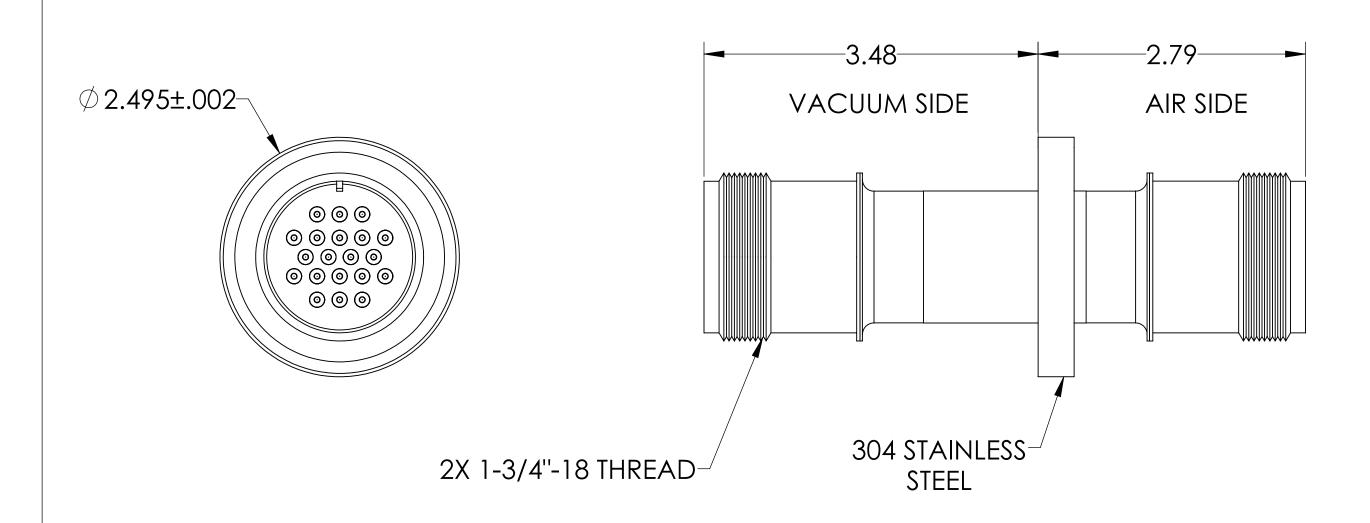


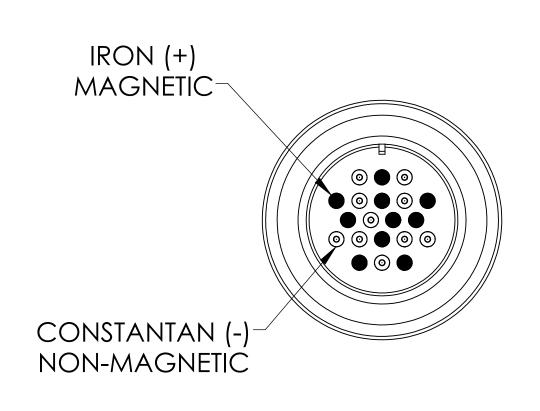

## AIR-SIDE CONNECTOR

## VACUUM-SIDE CONNECTOR





SHEET 1 OF 1

UNLESS OTHERWISE SPECIFIED:	QUOTA	NOIT		1/A		
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME		NADE	PRODUCTS II	NC
	DRAWN	M٦	9/11/2015	7 / 1 1		νС.
ANGULAR: MACH±1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015	CHECKED		9/11/2015	TITLE:		
	ENG APPR.	WJ	9/11/2015			
	THIRD ANGLE:			THE	RMOCOUPLE, TYP	ΈJ,
MATERIAL	APPLICATION			10 PAIRS, MS CONNECTOR, DOUBLE ENDED, 2.495" WELD ADAPTER		
IVIV (I LIKIV (L						
	NEXT ASSY		USED ON			
				DOWNLO	DADED FROM MPFPI.CC	M
FINISH	SURFACE FINIS	SH: e	OR BETTER	DWG. NO	Э.	REV
	UNLESS OTHERWISE SPECIFIED:				A1179-1-W	
PLATING	10145500 0111		0. 2020.		/ \     / /	

## SPECIFICATIONS:

- 1. TEMPERATURE RATING: -100 TO 450°C
- 2. LEAK RATE < 1X10-9 ATM CC/SEC HE

MS Series, Thermocouple Feedthrough, Type J, 10 Pairs, Double-Ended, w/ Air & Vacuum-side Connectors, 2.50" Dia Stainless Steel Weld Adpater