


MPF PRODUCTS INC.

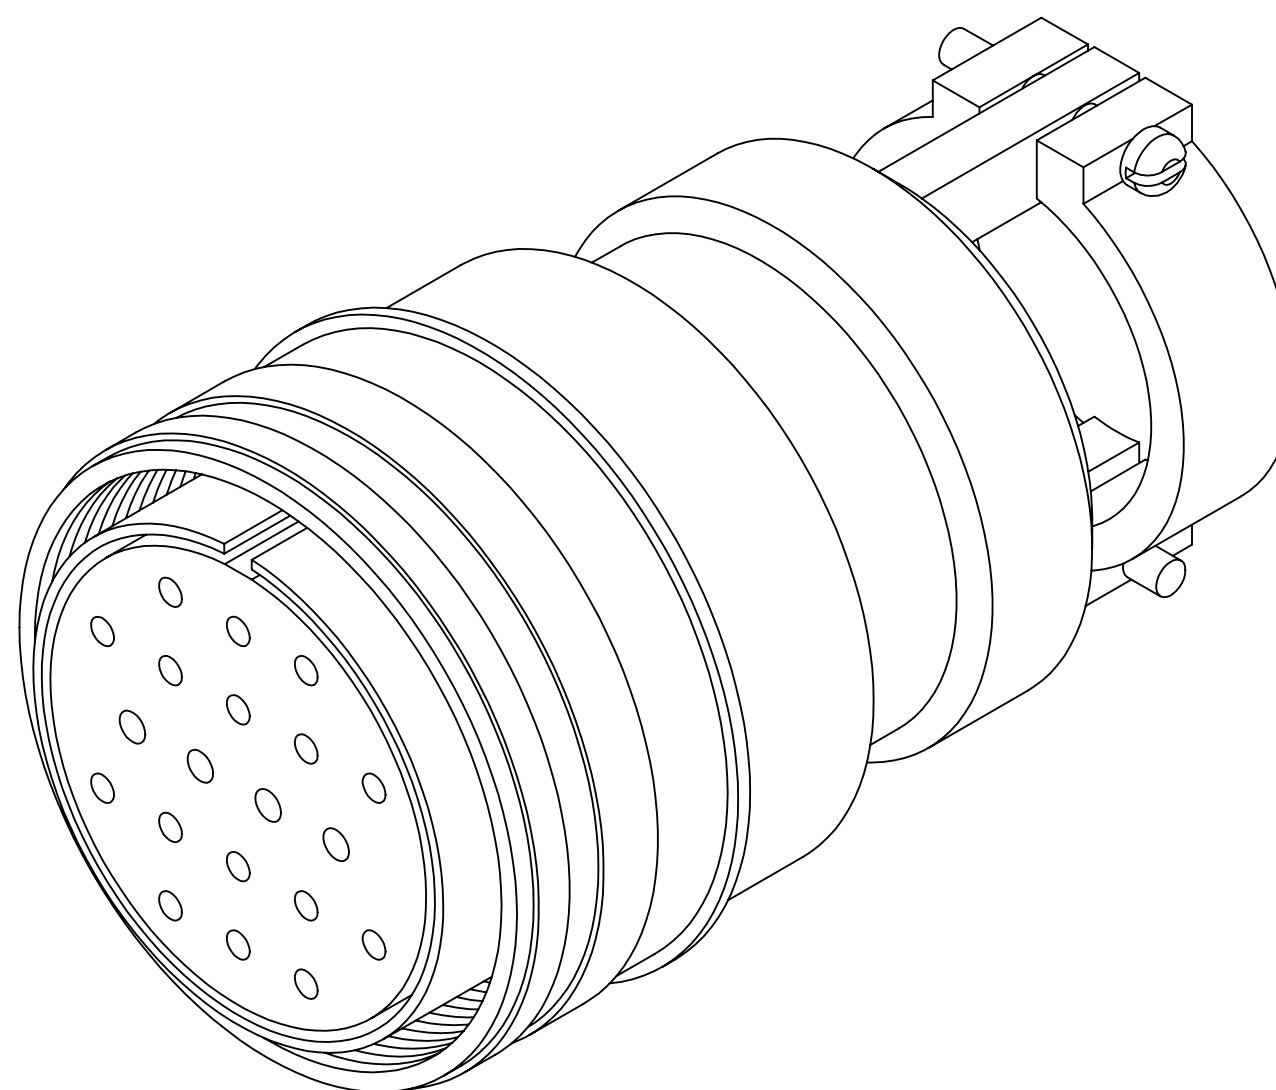

SPECIFICATIONS:

1. TEMPERATURE RATING: UP TO 350 °C

MS Series UHV Connector, 20 Pins, 700 Volts, 10 Amps per Pin, Accepts 0.056" Dia Pins

UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES	NAME	DATE	MPF PRODUCTS INC.
TOLERANCES:	DRAWN	9/11/2015	
ANGULAR: MACH ± 1/2°	CHECKED	9/11/2015	
TWO PLACE DECIMAL ± .030	ENG APPR.	9/11/2015	
THREE PLACE DECIMAL ± .015	THIRD ANGLE:		MS CIRCULAR CONNECTOR, IN-VACUUM, 700V, 75A, 20PINS
MATERIAL			
	APPLICATION		DOWNLOADED FROM MPFPI.COM
	NEXT ASSY	USED ON	
FINISH	SURFACE FINISH: 63/ OR BETTER		DWG. NO.
PLATING	UNLESS OTHERWISE SPECIFIED:		A1181-1-CN
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV
	Wednesday, February 13, 2019 8:50:34 AM		