

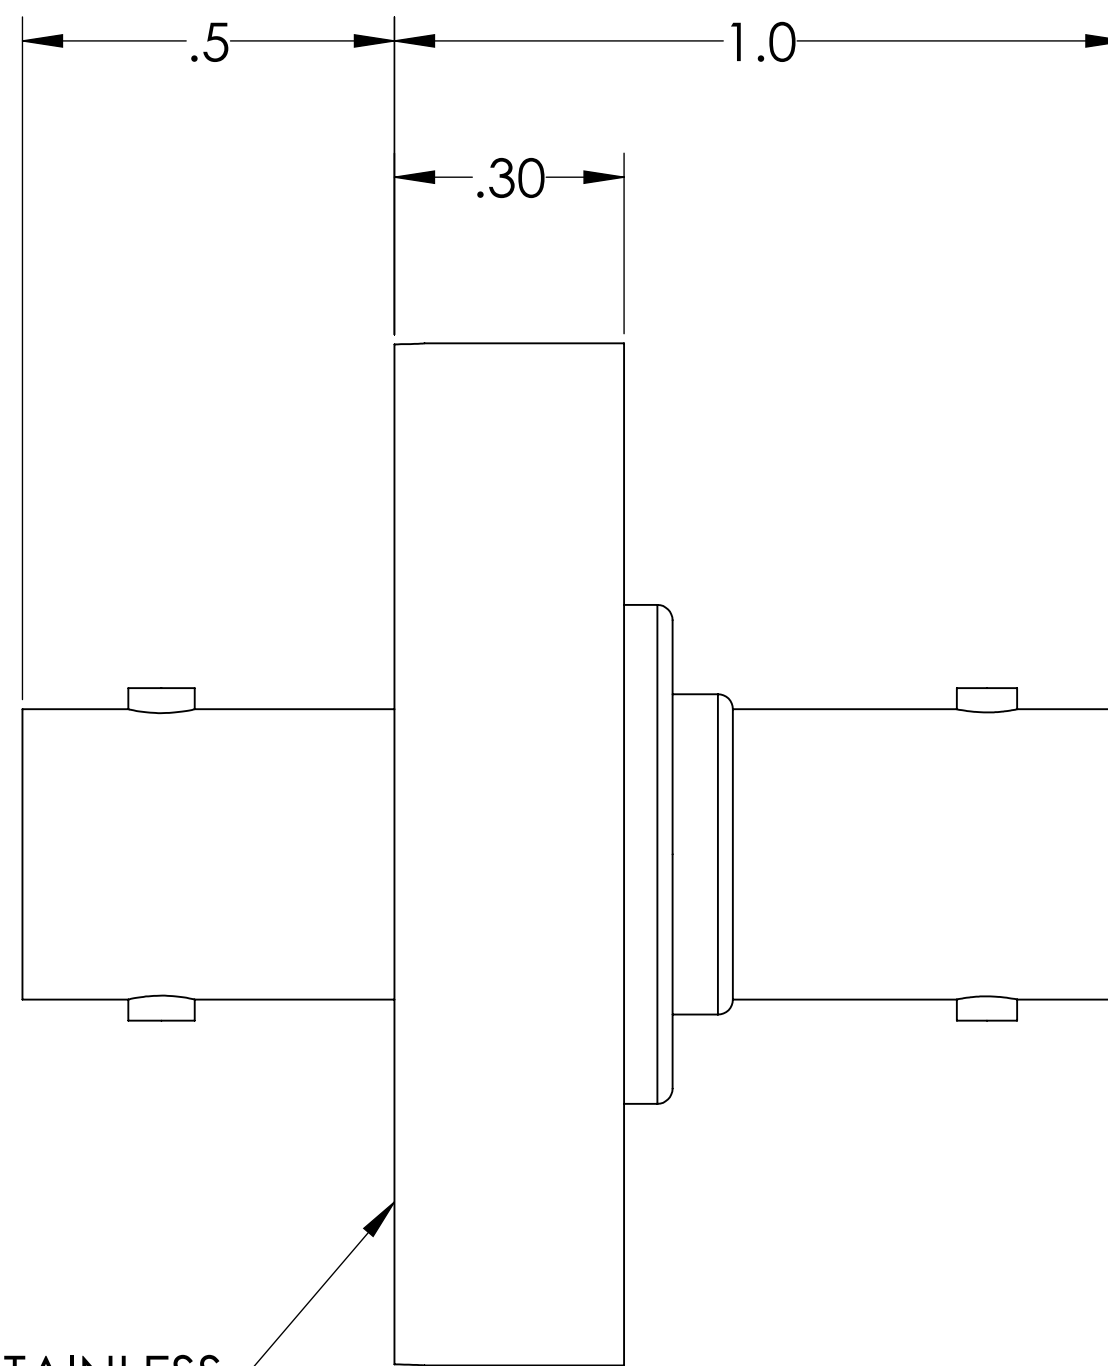
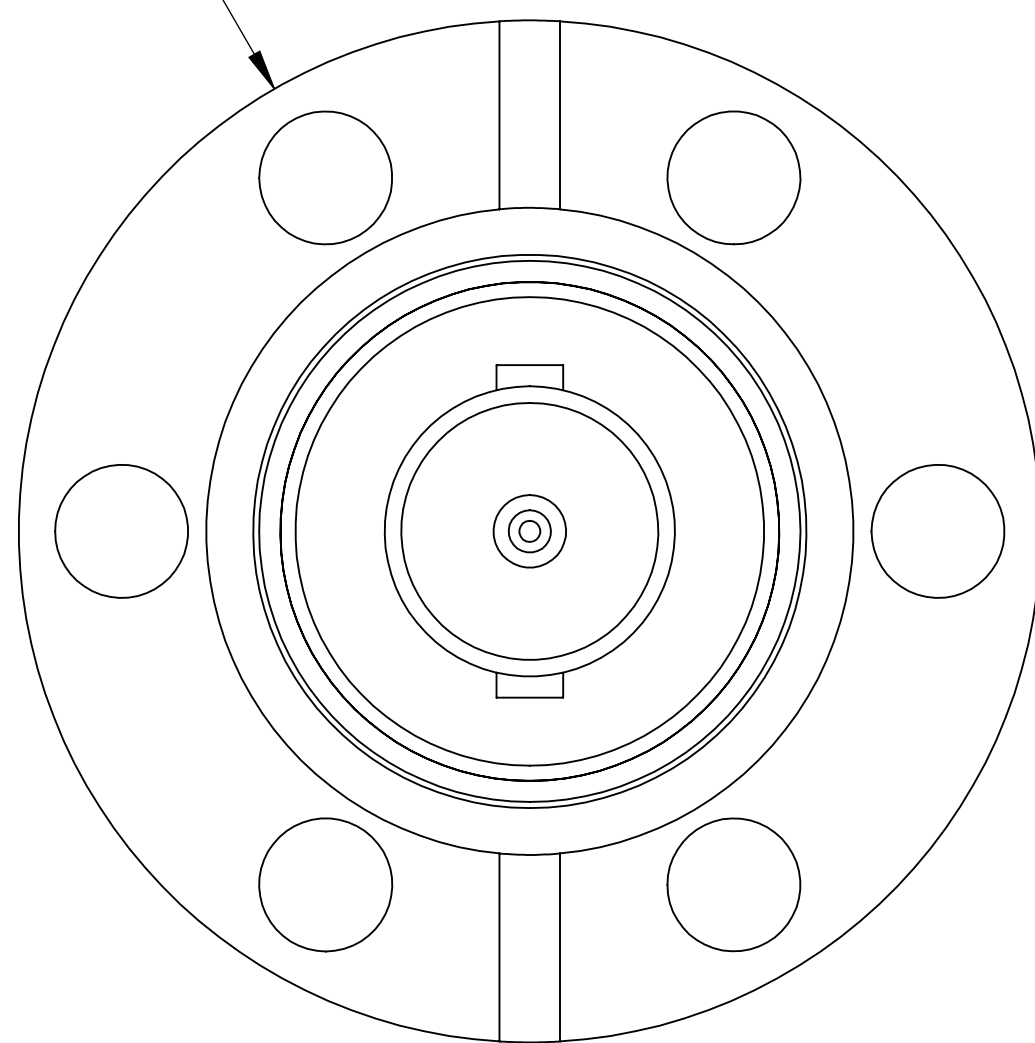


# MPF PRODUCTS INC.

Ø 1.33 CF



304 STAINLESS  
STEEL FLANGE

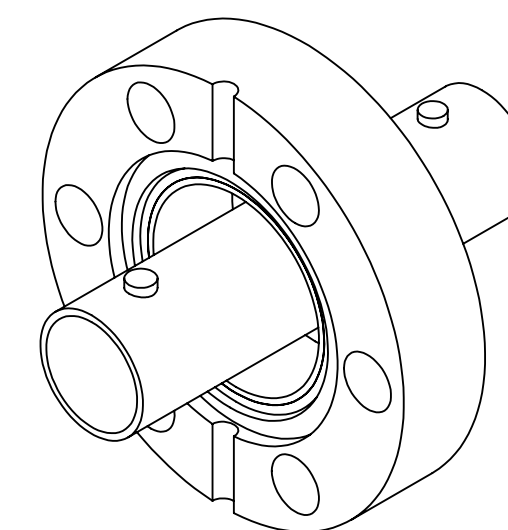

**NOTE:**

1. SHIELD: GROUNDING
2. VOLTAGE: 500 VOLTS DC
3. CURRENT: N/A
4. TEMPERATURE RATING: -200 TO 300°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: 50 OHM (4 GHz)

BNC Coaxial Feedthrough, 50 Ohm, 4 GHz, Grounded Shield, 1.33" Conflat Flange, UHV Compatible

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		TITLE: BNC COAXIAL FEEDTHROUGH, 50 OHM, 4GHZ, GROUND SHIELD, 1.33" CONFLAT FLANGE	
FINISH		APPLICATION			
PLATING		NEXT ASSY USED ON			
SURFACE FINISH:		63/ OR BETTER		DOWNLOADED FROM MPFPI.COM	
UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		DWG. NO. A12380-1-CF	
				REV	
				Wednesday, May 1, 2019 4:02:36 PM	