
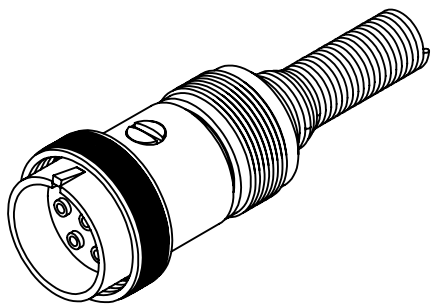
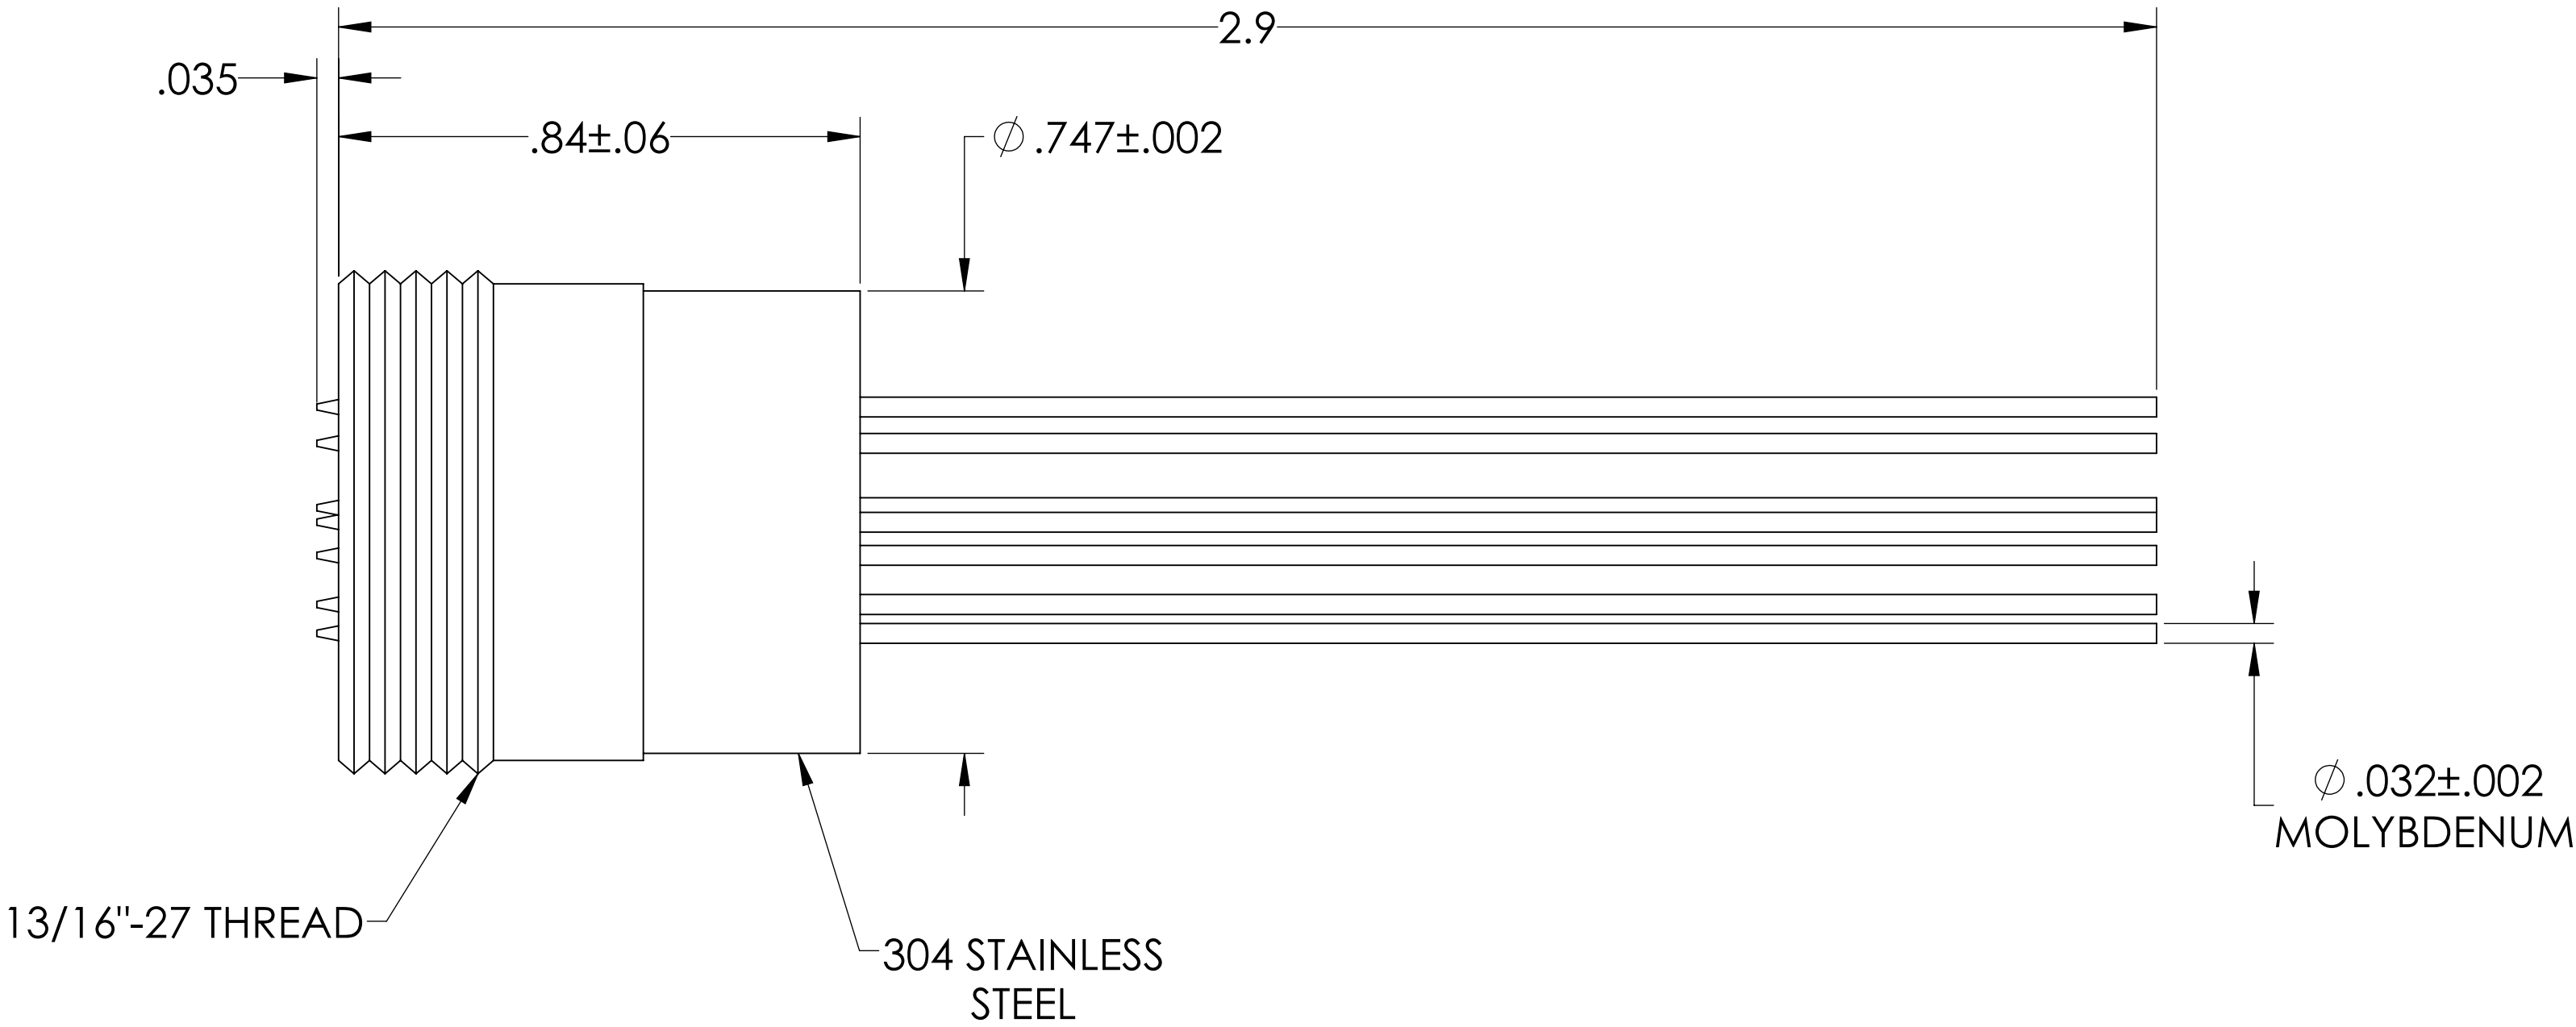
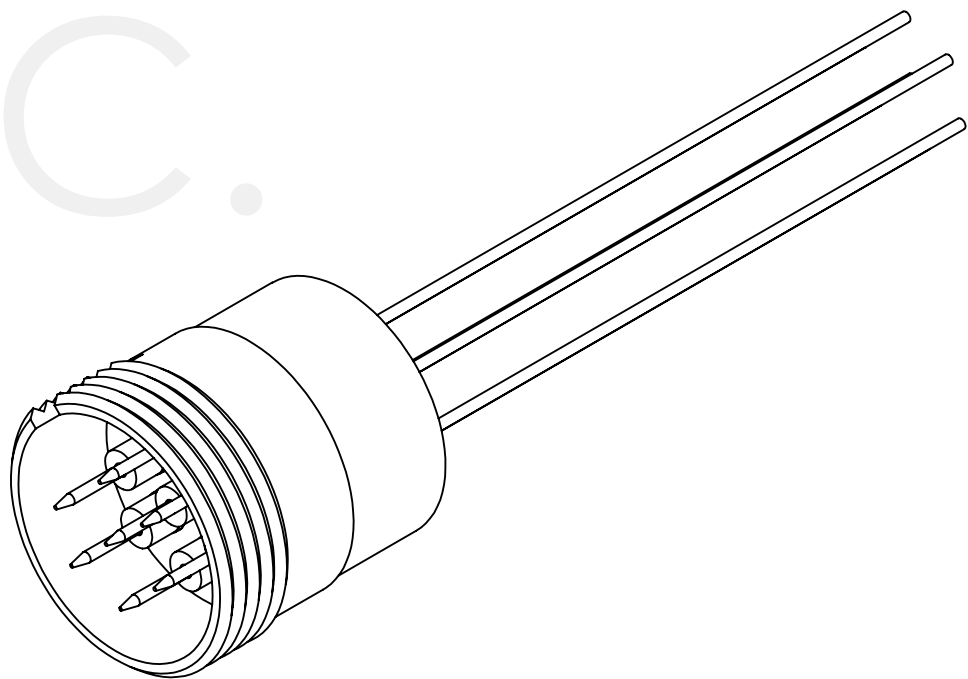


MPF PRODUCTS INC.



- SPECIFICATIONS:
- VOLTAGE: 500 VOLTS DC
 - CURRENT: 3.5 AMPS PER PIN
 - TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
 - LEAK RATE < 1X10-9 ATM CC/SEC HE

Multipin Feedthrough, 7 Pins, 500 Volts, 3.5 Amps per Pin, 0.032" Dia Conductors, 0.75" Dia Stainless Steel Weld Adapter

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A		
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC. TITLE: MULTIPIN, 7 PINS, 500V, 3.5 A, .747" WELD ADAPTER	
		DRAWN	WJ	9/11/2015		
		CHECKED		9/11/2015		
		ENG APPR.	WJ	9/11/2015		
MATERIAL		THIRD ANGLE:			DOWNLOADED FROM MPFPI.COM	
						
		APPLICATION				
		NEXT ASSY				USED ON
FINISH		SURFACE FINISH:			DWG. NO.	REV
		✓ OR BETTER				
PLATING		UNLESS OTHERWISE SPECIFIED:			A1488-1-W	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES				
					Friday, January 25, 2019 3:11:16 PM	