

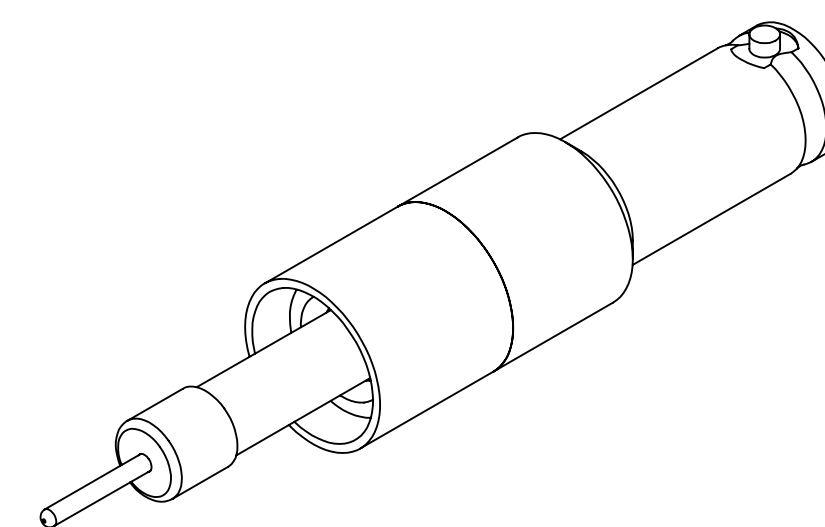


MPF PRODUCTS INC.

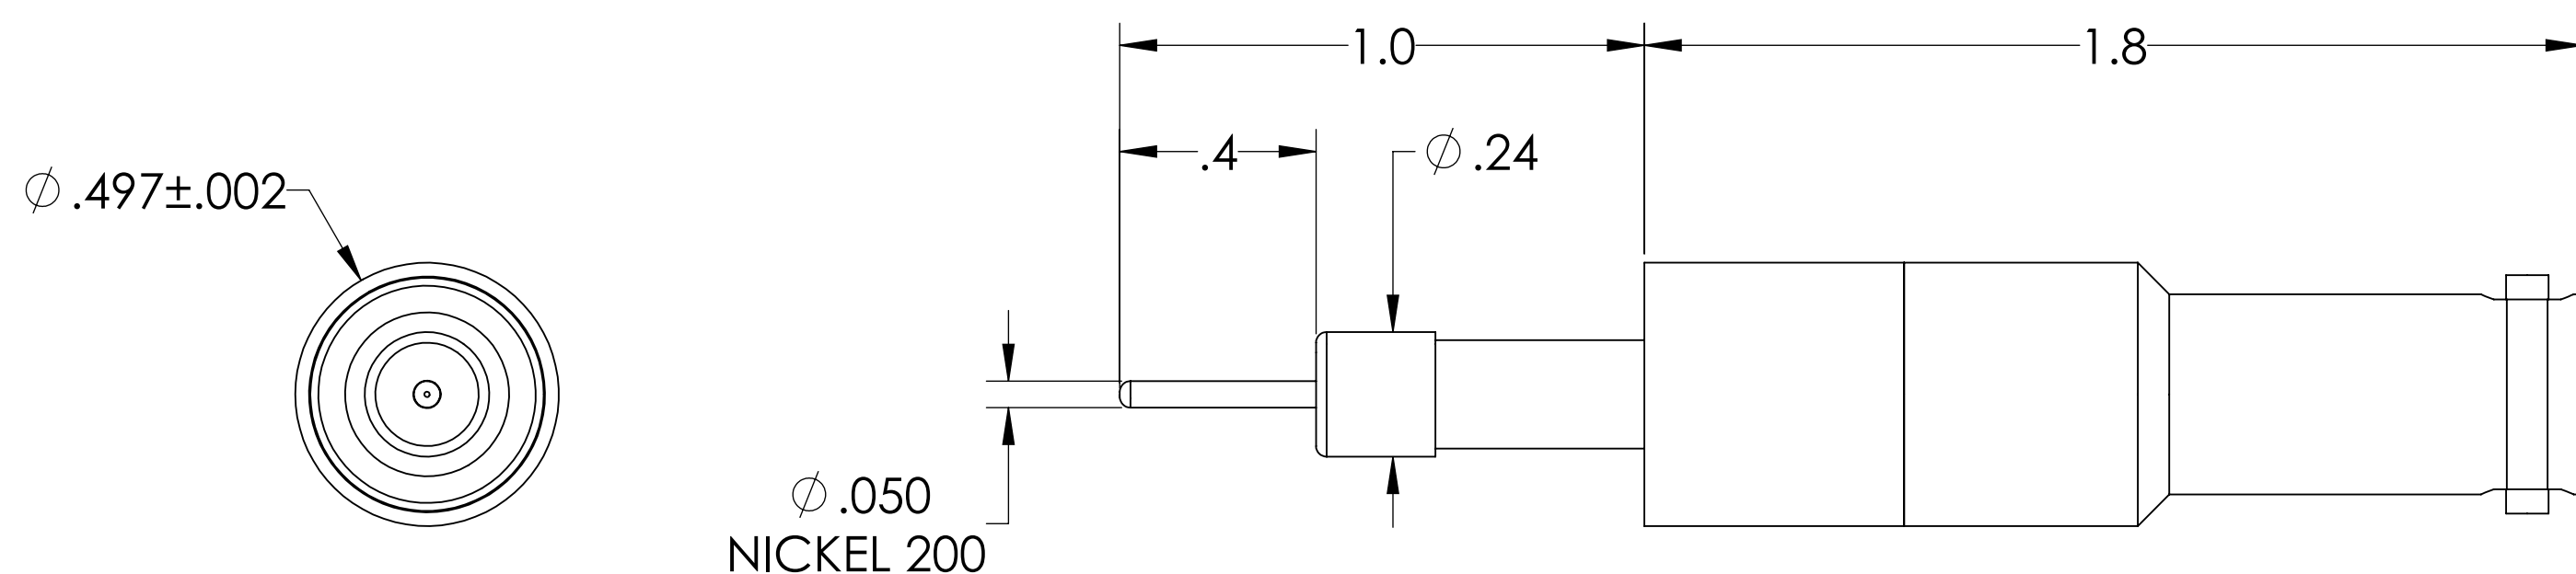

PART #	AIRSIDE CONNECTOR INCLUDED
A1497-1-W	YES
A1497-2-W	NO

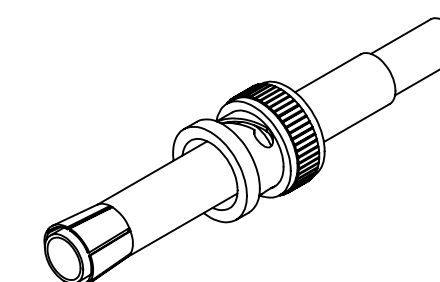

NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 10,000 VOLTS DC
3. CURRENT: 5 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

SHV-10 Coaxial Feedthrough, 1 Pin, Grounded Shield, Exposed Insulator, 0.497" Dia SS Weld Adapter, UHV Compatible

UNLESS OTHERWISE SPECIFIED:	QUOTATION #	N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE
ANGULAR: MACH ± 1/2°	WJ	9/11/2015
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015
MATERIAL	THIRD ANGLE:	
	APPLICATION	
	NEXT ASSY	USED ON
FINISH	SURFACE FINISH:	63 OR BETTER
PLATING	UNLESS OTHERWISE SPECIFIED:	
	ALL DIAMETERS CONCENTRIC WITHIN .005.	REMOVE ALL BURRS AND SHARP EDGES
	TITLE:	MPF PRODUCTS INC.
		SHV-10 COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, EXPOSED, 0.497" DIA SS WELD ADAPTER
	DOWNLOADED FROM MPFPI.COM	
	DWG. NO.	A1497
	REV	
	Friday, January 18, 2019 9:39:33 AM	