
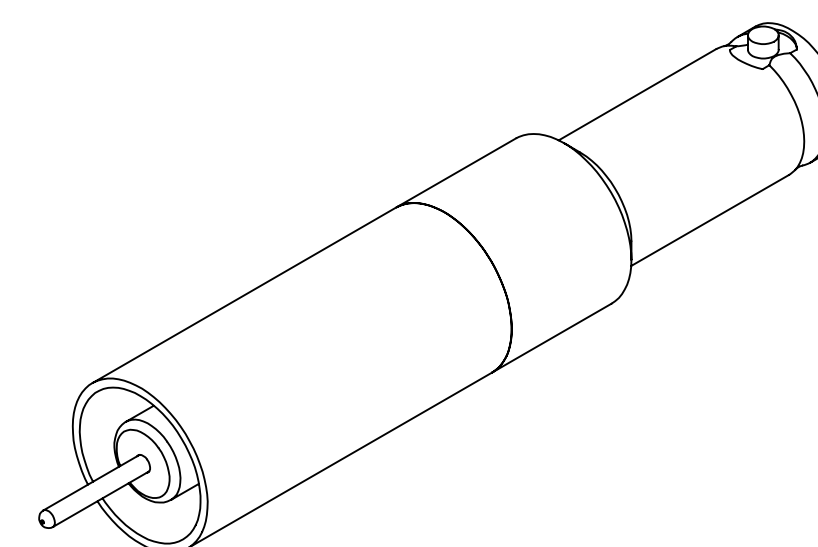


MPF PRODUCTS INC.

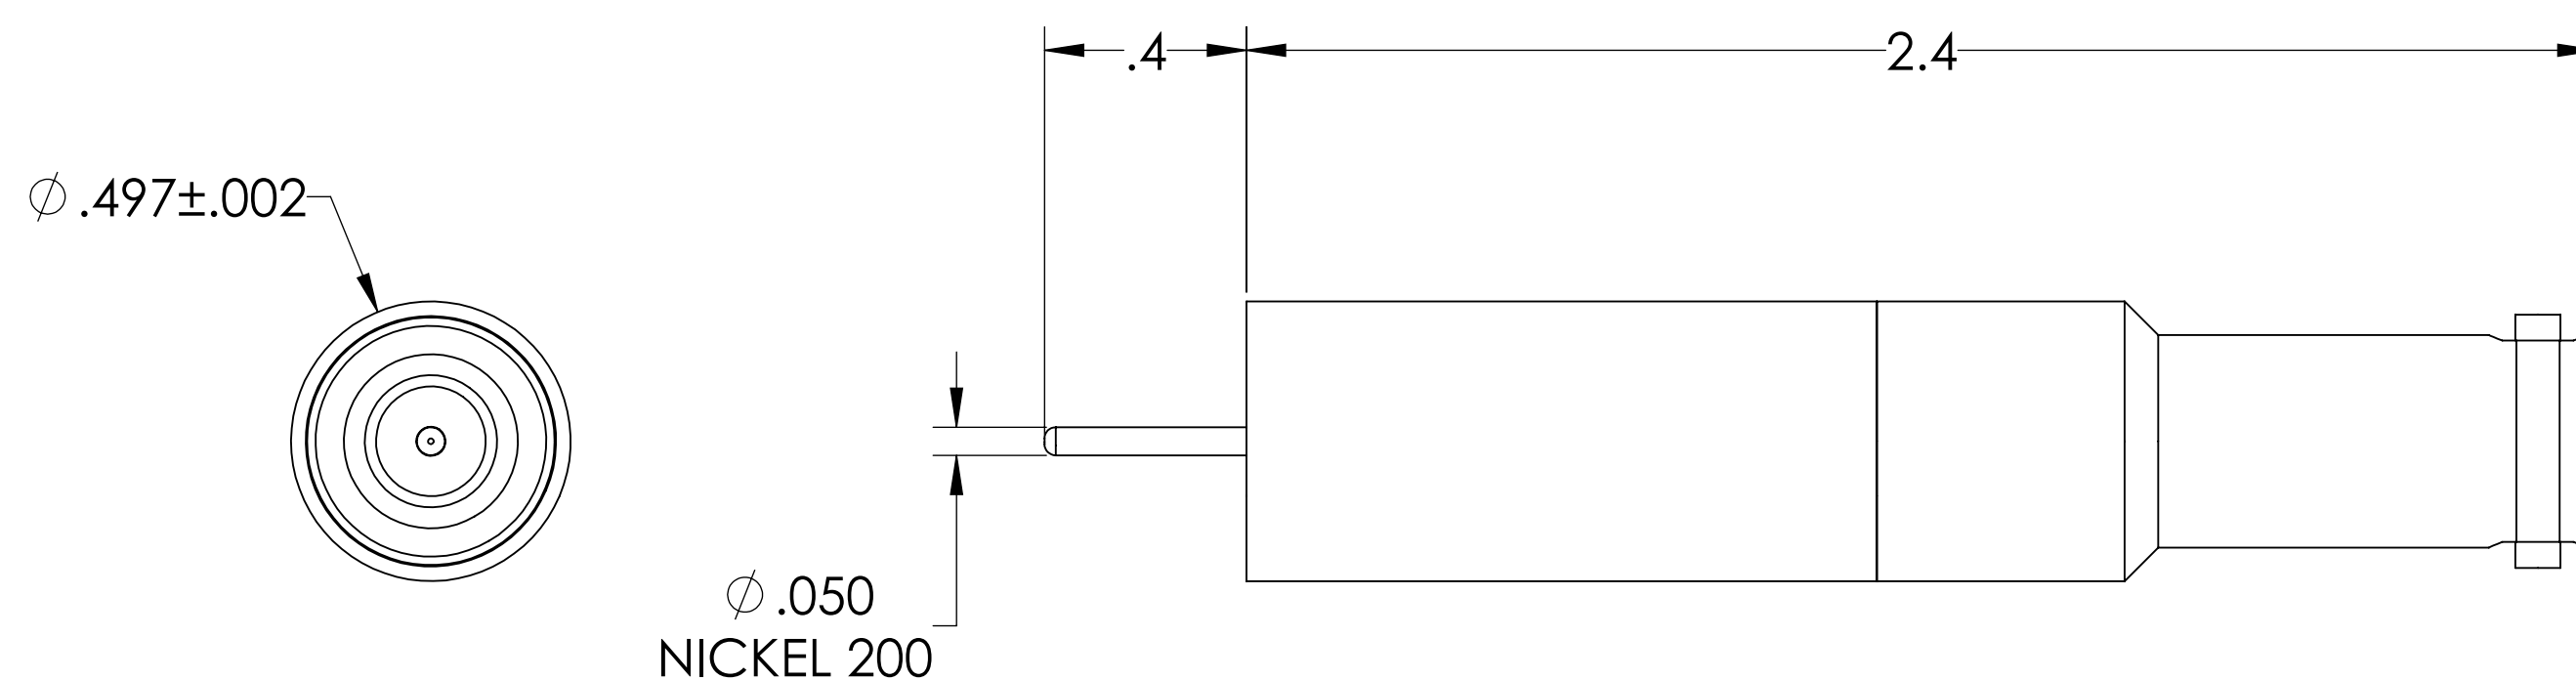


PART #	AIRSIDE CONNECTOR INCLUDED
A1499-1-W	YES
A1499-2-W	NO

NOTE:

1. SHIELD: GROUNDED
2. VOLTAGE: 10,000 VOLTS DC
3. CURRENT: 5 AMPS
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

SHV-10 Coaxial Feedthrough, 1 Pin, Grounded Shield, 0.620" Dia SS Weld Adapter, UHV Compatible

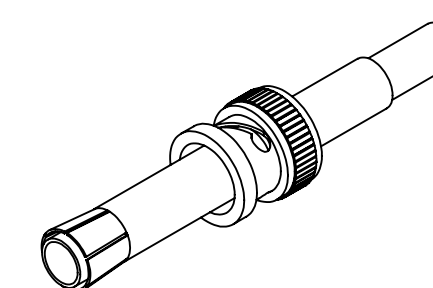

UNLESS OTHERWISE SPECIFIED:		QUOTATION #	
DIMENSIONS ARE IN INCHES		N/A	
TOLERANCES:		NAME	DATE
ANGULAR: MACH $\pm 1/2^\circ$		WJ	9/11/2015
TWO PLACE DECIMAL $\pm .030$		CHECKED	9/11/2015
THREE PLACE DECIMAL $\pm .015$		ENG APPR.	WJ 9/11/2015
MATERIAL		THIRD ANGLE:	
APPLICATION		NEXT ASSY	
USED ON		SURFACE FINISH:	
FINISH		63 OR BETTER	
PLATING		UNLESS OTHERWISE SPECIFIED:	
ALL DIAMETERS CONCENTRIC WITHIN .005.		REMOVE ALL BURRS AND SHARP EDGES	
TITLE:		DWG. NO.	
SHV-10 COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, 0.620" DIA SS WELD ADAPTER		A1499	
DOWNLOADED FROM MPFPI.COM		REV	
Friday, January 18, 2019 9:38:57 AM			