
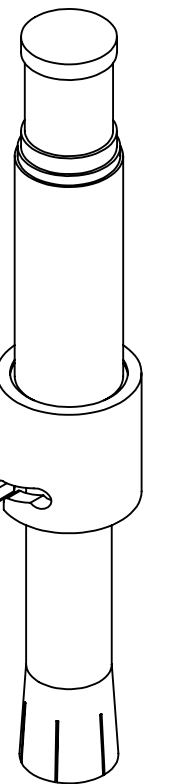


MPF PRODUCTS INC.

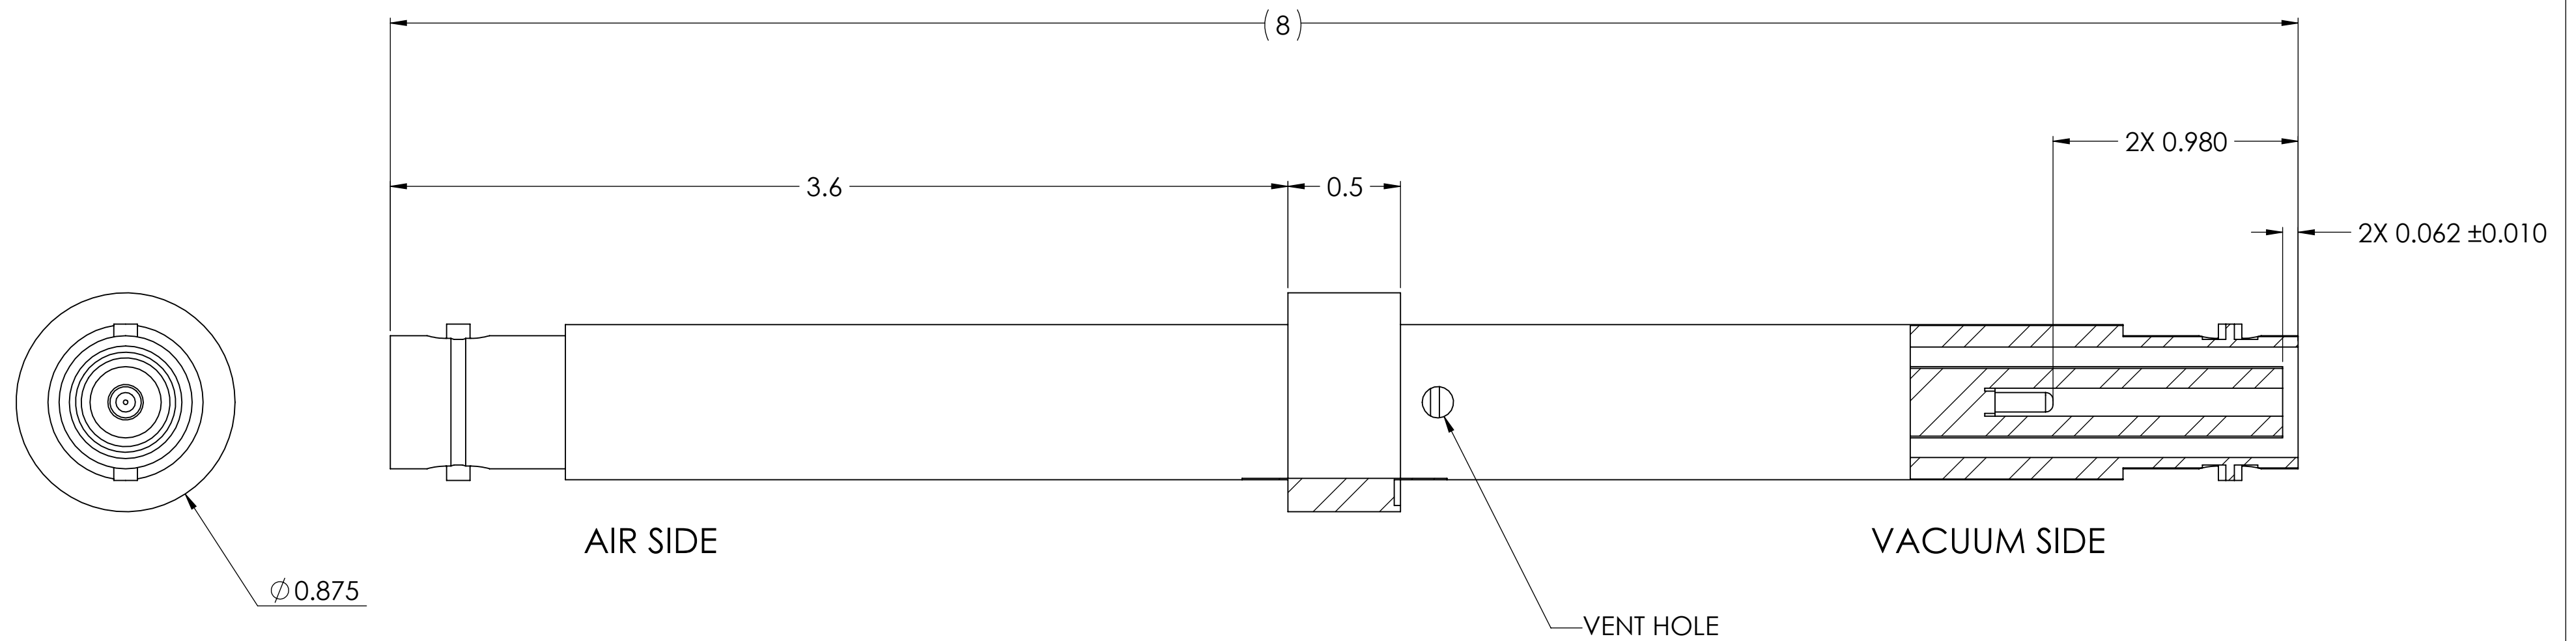

NOTES:

1. CURRENT RATING: 15 AMPS
2. VOLTAGE RATING: 20,000 VOLTS
3. TEMPERATURE RATING: -200 °C TO 450 °C

SHV-20, Coaxial Feedthrough, 1 Pin, Grounded Shield, $\varnothing 0.875$ " Dia. Stainless Steel Weld Adapter, Air-Side Connector Included

| | | | | | |
|---|--|---|-----------|---|-----|
| UNLESS OTHERWISE SPECIFIED: | | QUOTATION # | | N/A | |
| DIMENSIONS ARE IN INCHES TOLERANCES: | | NAME | DATE | MPF PRODUCTS INC. | |
| ANGULAR: MACH ± 1/2° | | DRAWN | 9/11/2015 | | |
| TWO PLACE DECIMAL ± .030 | | CHECKED | 9/11/2015 | | |
| THREE PLACE DECIMAL ± .015 | | ENG APPR. | 9/11/2015 | | |
| MATERIAL | | THIRD ANGLE: | | COAXIAL, SHV-20, 1 PIN, GROUNDED SHIELD, WELD | |
| | | APPLICATION | | | |
| | | NEXT ASSY | USED ON | | |
| | | | | | |
| FINISH | | SURFACE FINISH: $\sqrt{63}$ OR BETTER | | DOWNLOADED FROM MPFPI.COM | |
| PLATING | | UNLESS OTHERWISE SPECIFIED: | | DWG. NO. | REV |
| | | ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES | | A15260-1-W | |
| | | | | Friday, September 21, 2018 6:34:44 AM | |