



MPF PRODUCTS INC.

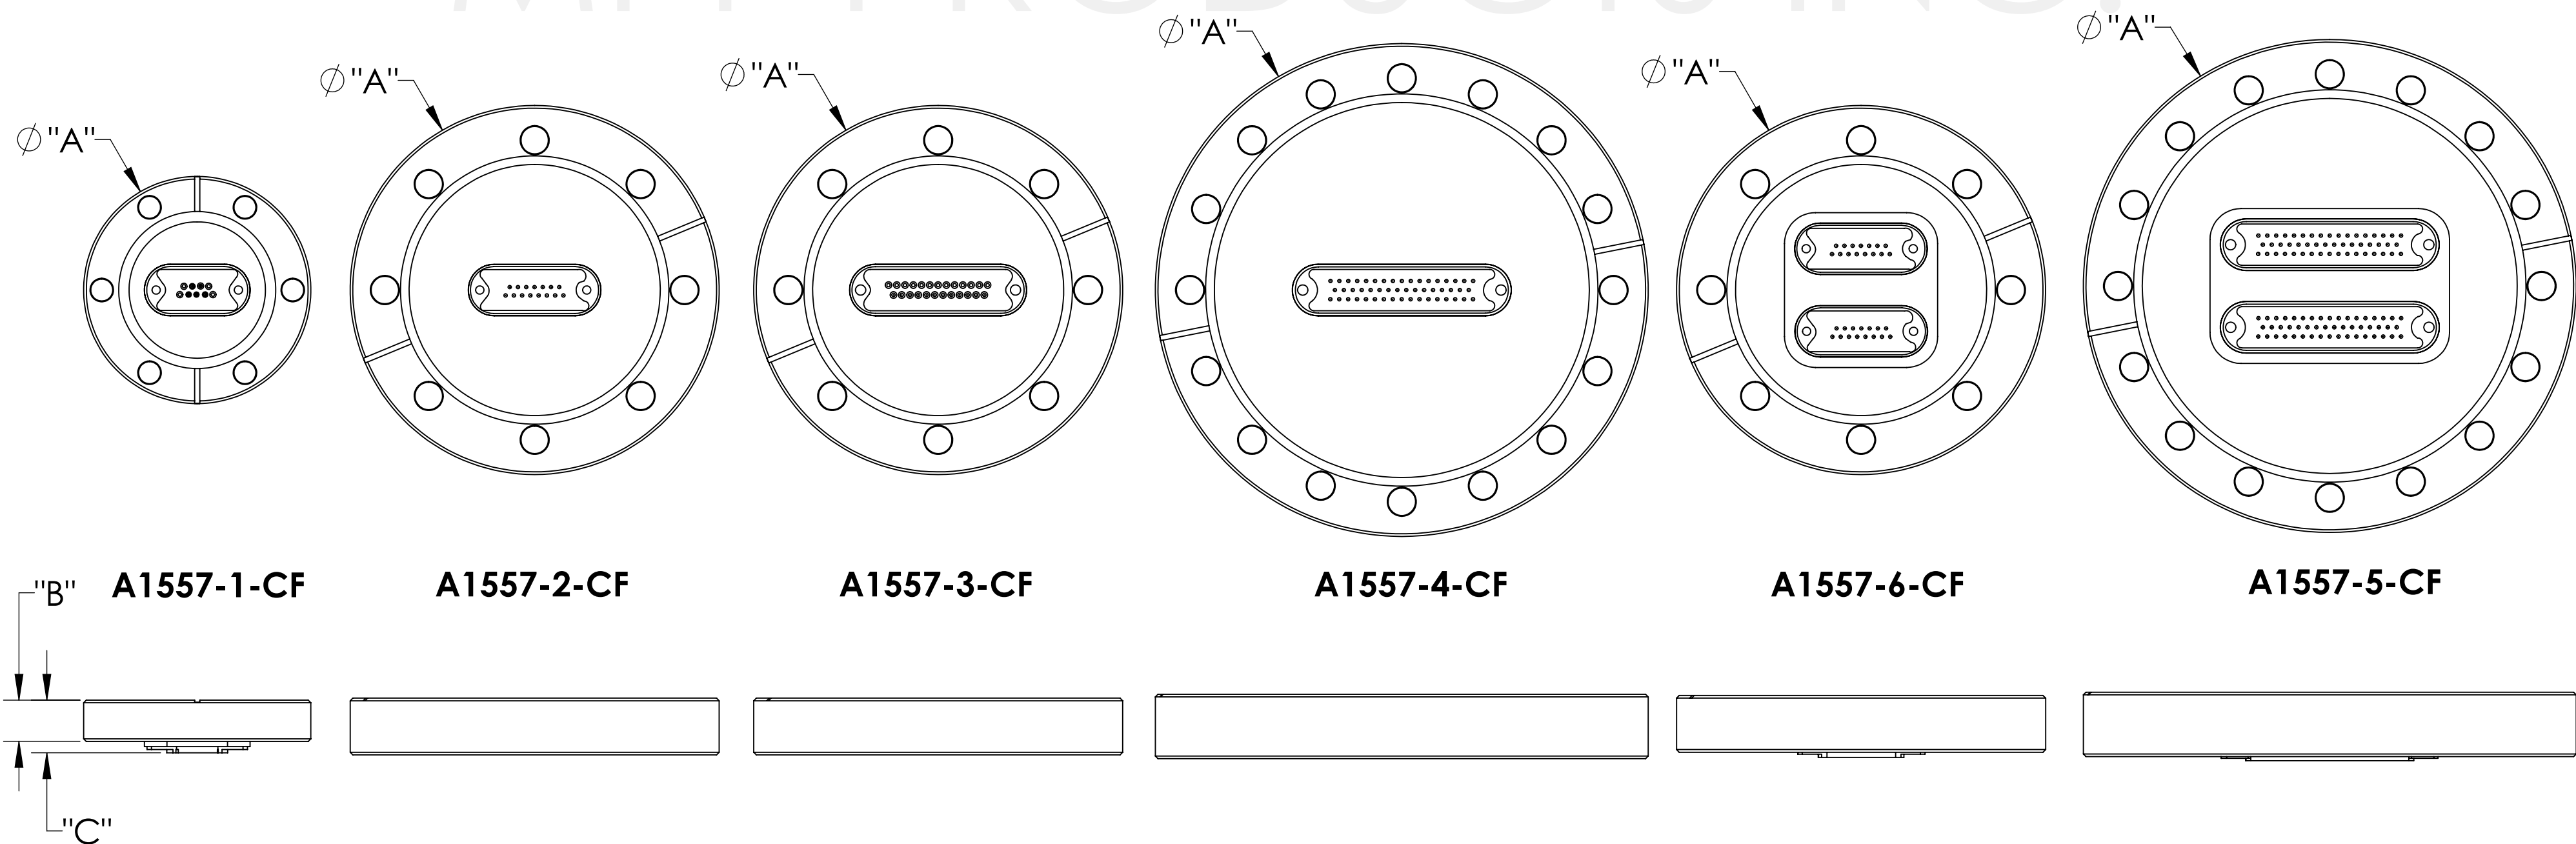

PART #	"A"	"B"	"C"	# OF PINS
A1557-1-CF	2.75	.50	.63	9 PINS
A1557-2-CF	4.50	.68	.75	15 PINS
A1557-3-CF	4.50	.68	.75	25 PINS
A1557-4-CF	6.00	.78	.85	50 PINS
A1557-5-CF	4.50	.68	.75	30 PINS (2X 15 PINS)
A1557-6-CF	6.00	.78	.85	100 PINS (2X 50 PINS)

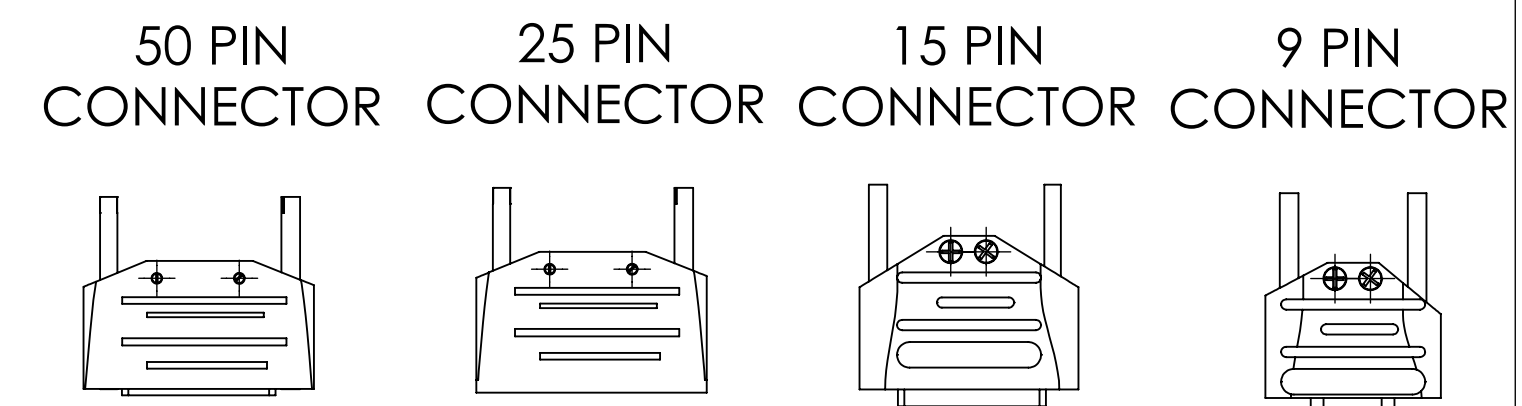

SPECIFICATIONS:

1. VOLTAGE: 500 VOLTS DC
2. CURRENT: 5 AMPS PER PIN
3. TEMPERATURE RATING: -200 TO 450°C WITHOUT CONNECTOR
4. LEAK RATE < 1X10-9 ATM CC/SEC HE

Subminiature D-type Multipin Feedthrough, 500 Volts, 5 Amps per Pin, Conflat Flange

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES		NAME	DATE	MPF PRODUCTS INC.	
TOLERANCES:		DRAWN	9/11/2015		
ANGULAR: MACH ± 1/2°		CHECKED	9/11/2015		
TWO PLACE DECIMAL ± .030		ENG APPR.	9/11/2015		
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		MULTIPIN, TYEP-D 500V, 5A, CONFLAT FLANGE	
MATERIAL		APPLICATION			
FINISH		NEXT ASSY	USED ON		
PLATING		SURFACE FINISH: 63/ OR BETTER			
UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005.		DOWNLOADED FROM MPFPI.COM	
REMOVE ALL BURRS AND SHARP EDGES		Thursday, February 7, 2019 8:40:03 AM		REV	