
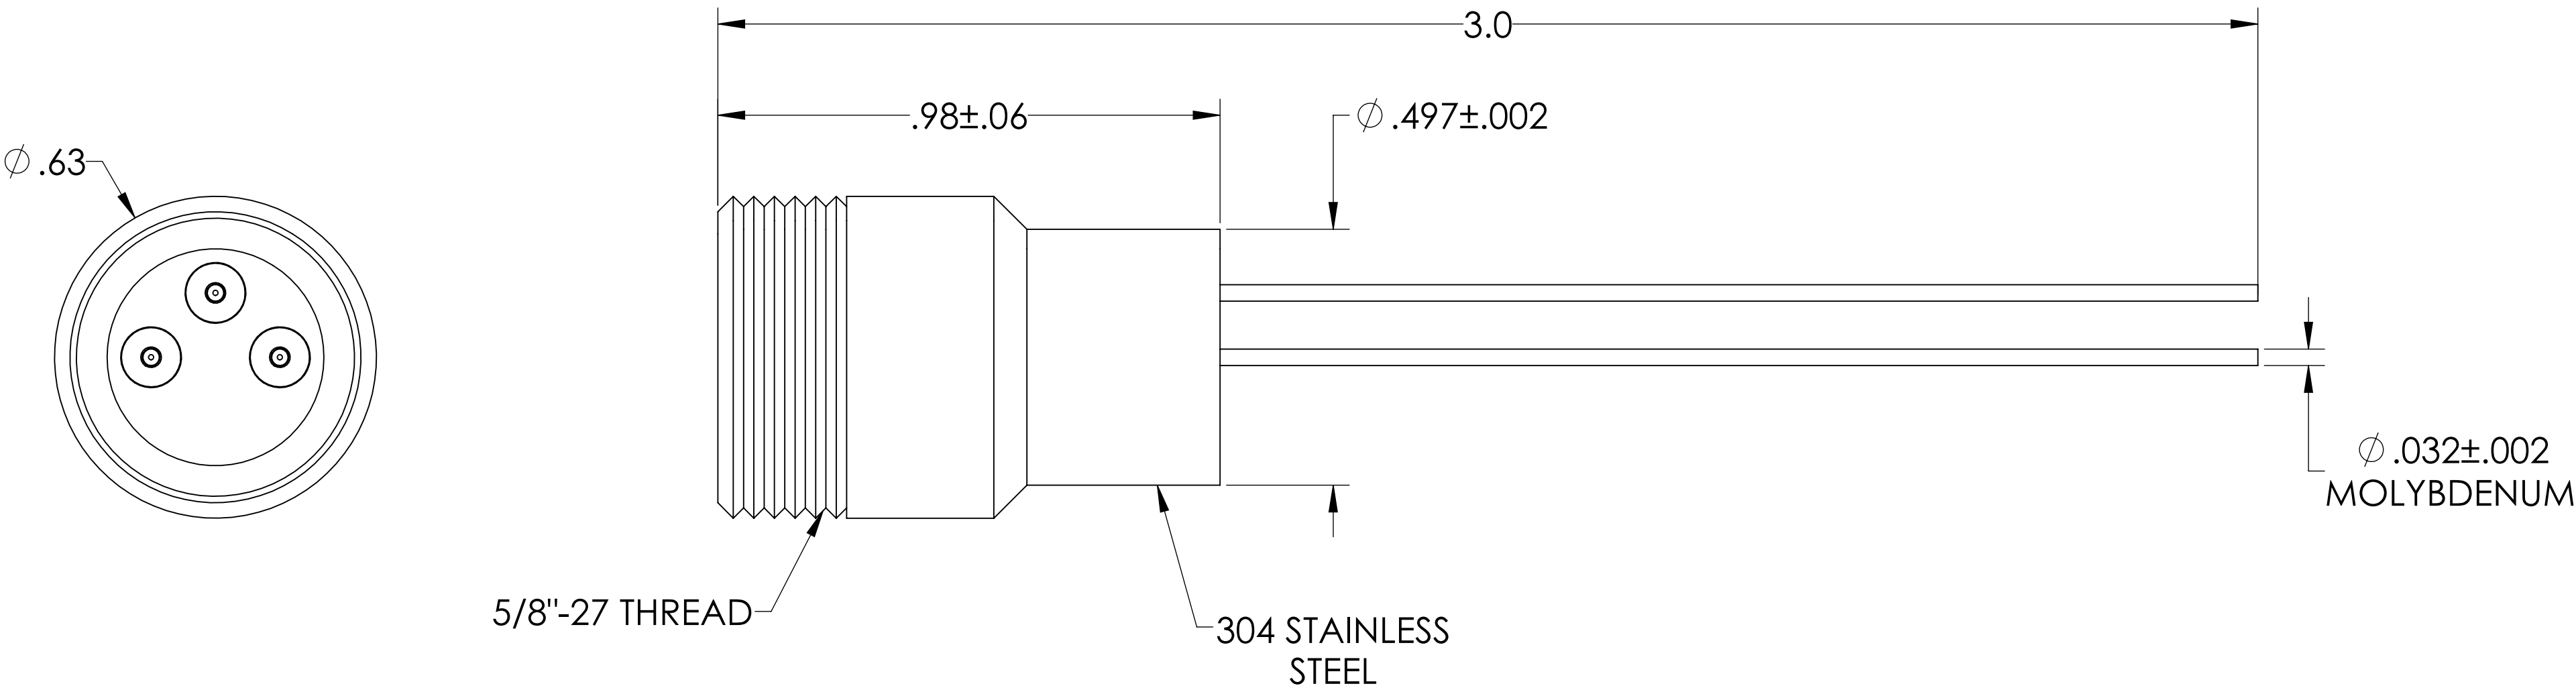



MPF PRODUCTS INC.


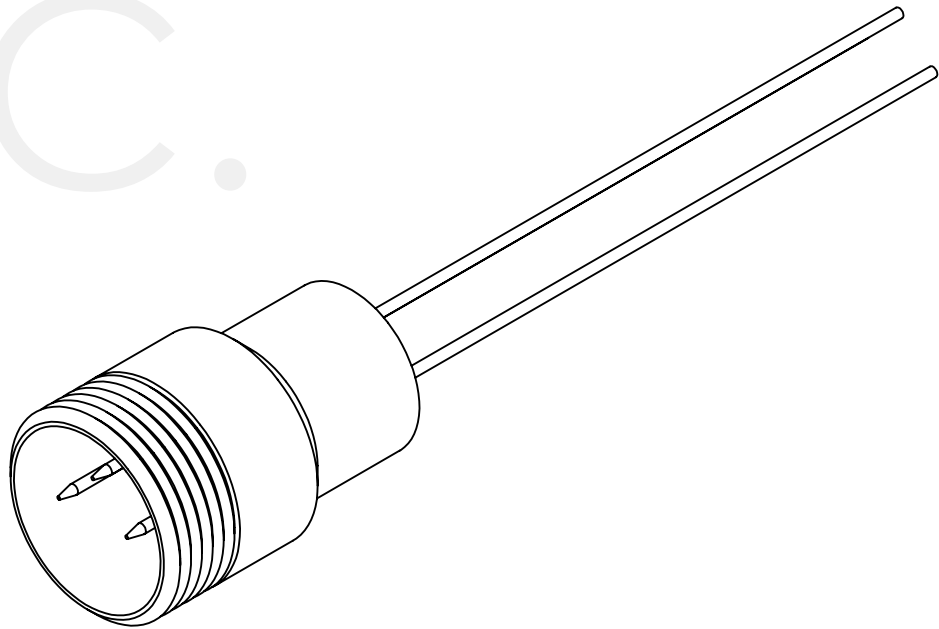


SPECIFICATIONS:

- 1. VOLTAGE: 500 VOLTS DC
- 2. CURRENT: 3.5 AMPS PER PIN
- 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
- 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

Multipin Feedthrough, 3 Pins, 500 Volts, 3.5 Amps per Pin, 0.032" Dia Conductors, 0.497" Dia Stainless Steel Weld Adapter

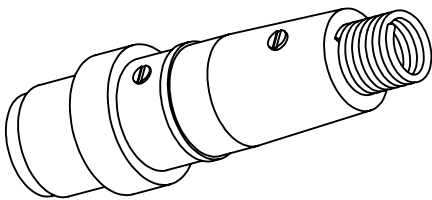

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC.
		DRAWN	WJ	9/11/2015	
		CHECKED		9/11/2015	
		ENG APPR.	WJ	9/11/2015	
		THIRD ANGLE:			
MATERIAL				MULTIPIN, 3 PINS, 500V, 3.5 A, .497" WELD ADAPTER	
		APPLICATION			
		NEXT ASSY			
		USED ON			
FINISH		SURFACE FINISH:  63 OR BETTER		DOWNLOADED FROM MPFPI.COM	
PLATING		UNLESS OTHERWISE SPECIFIED:		DWG. NO.	
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV	
				A1607-1-W	
				Monday, January 28, 2019 9:10:43 AM	