
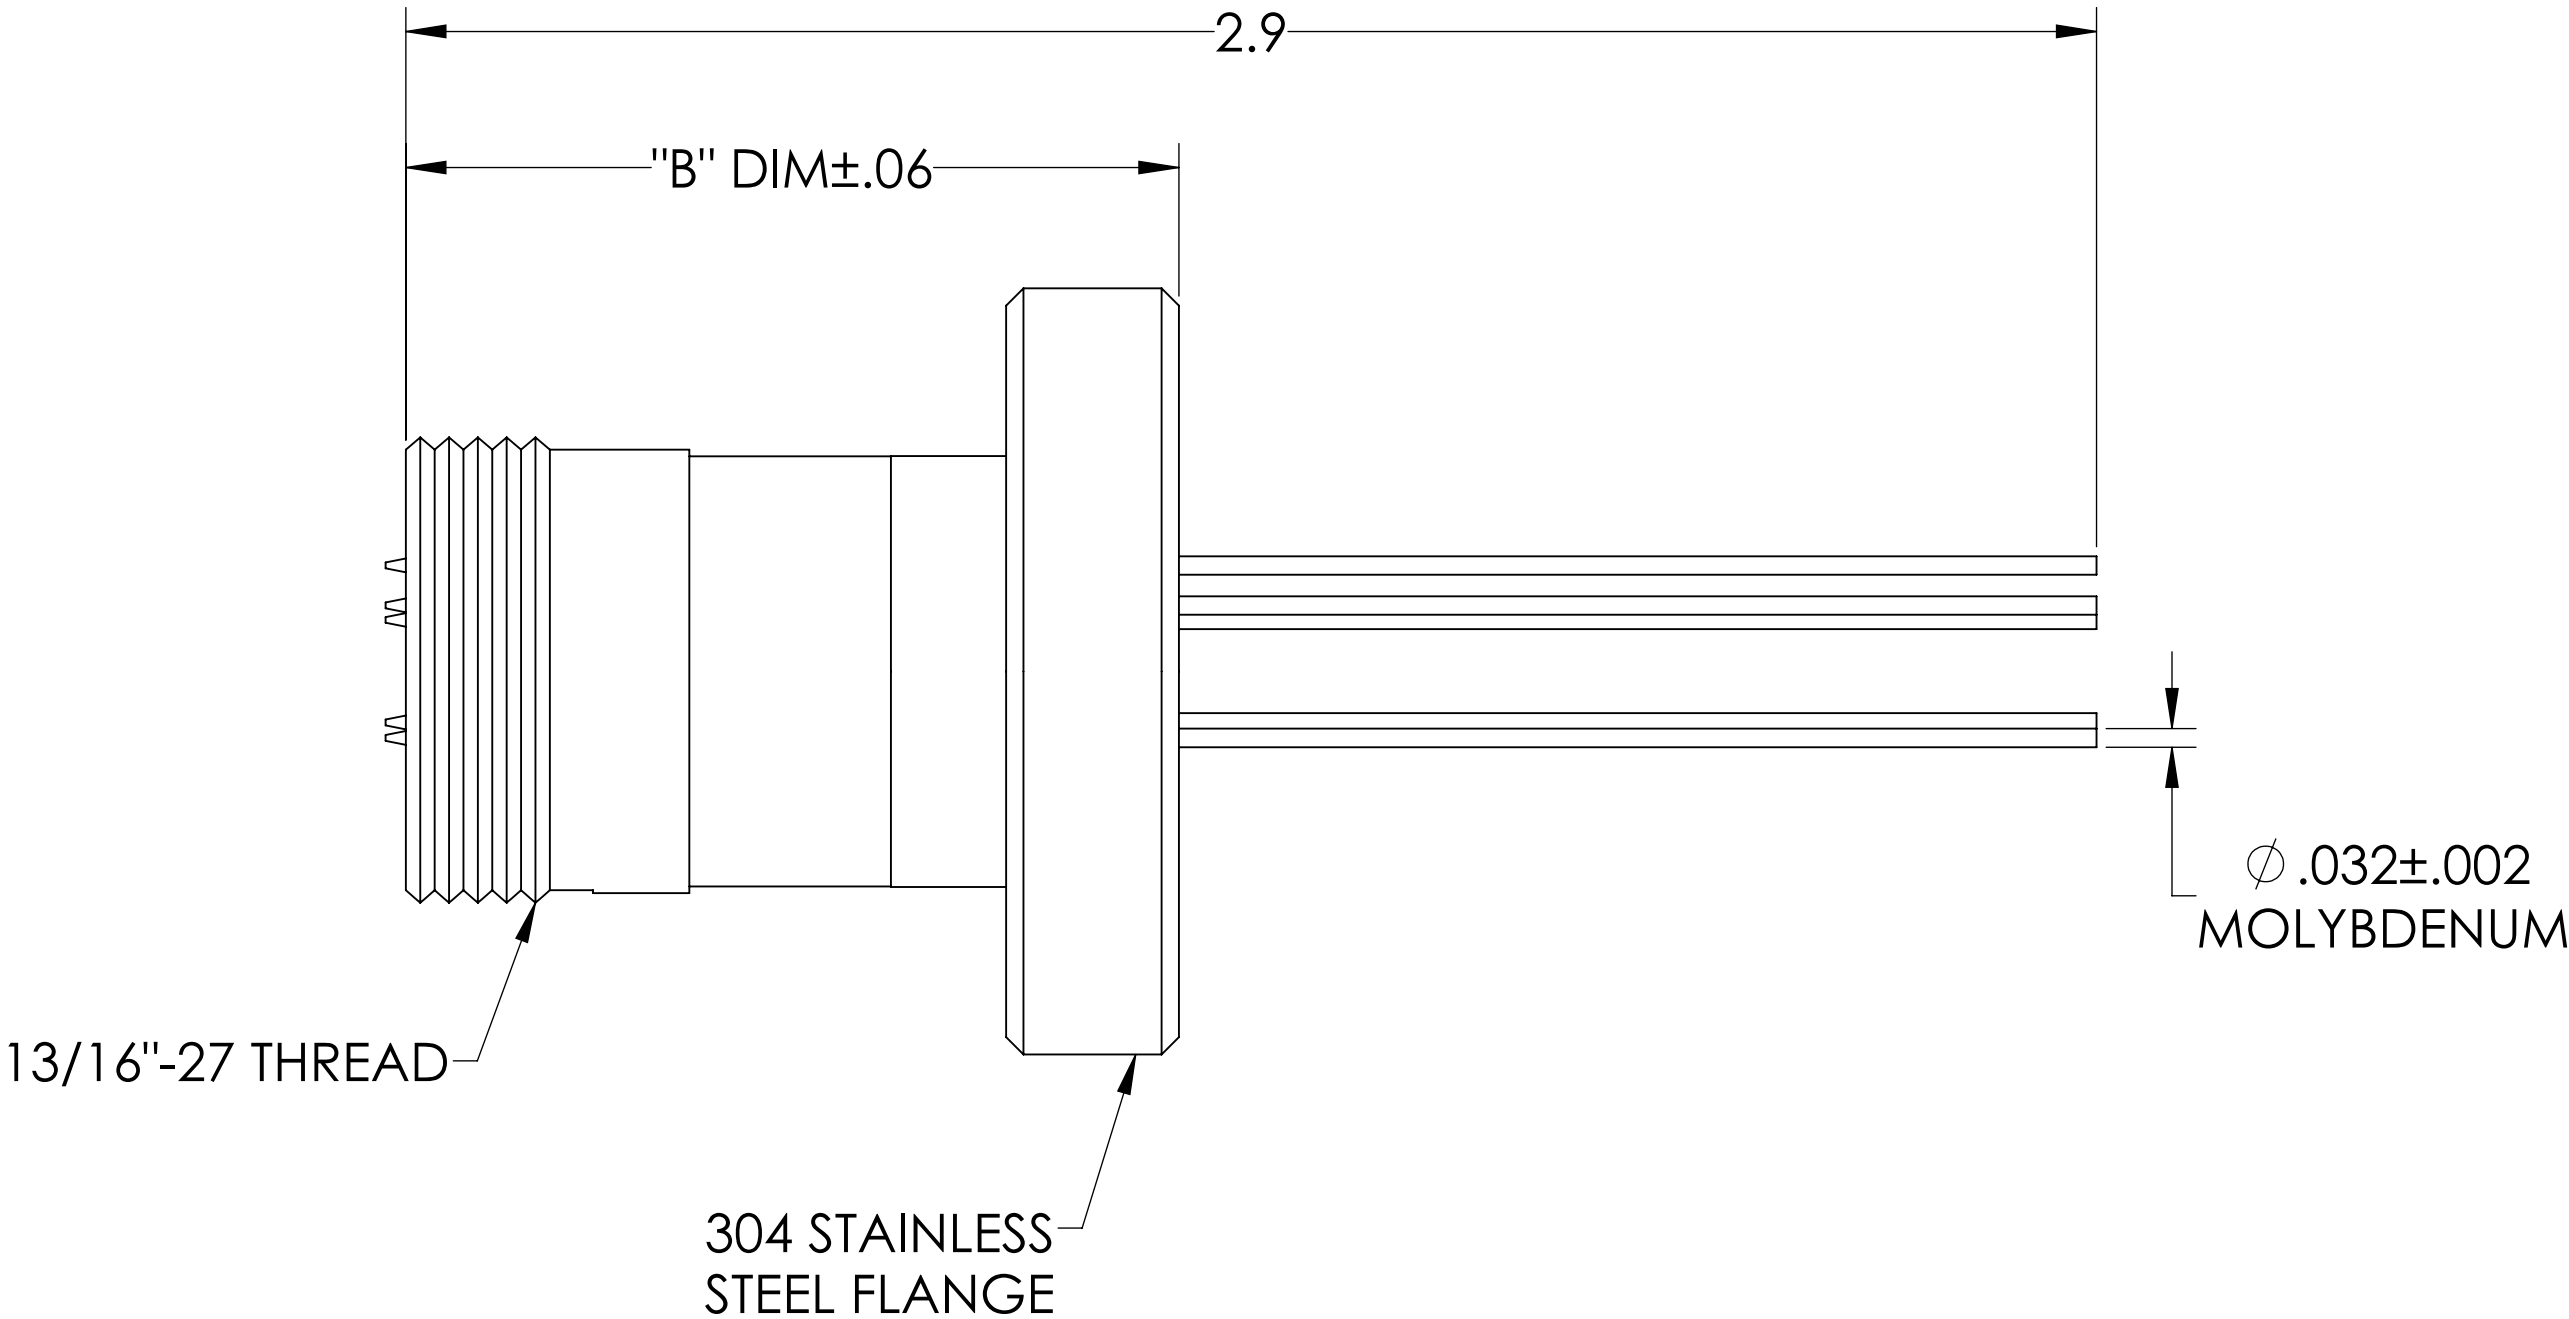
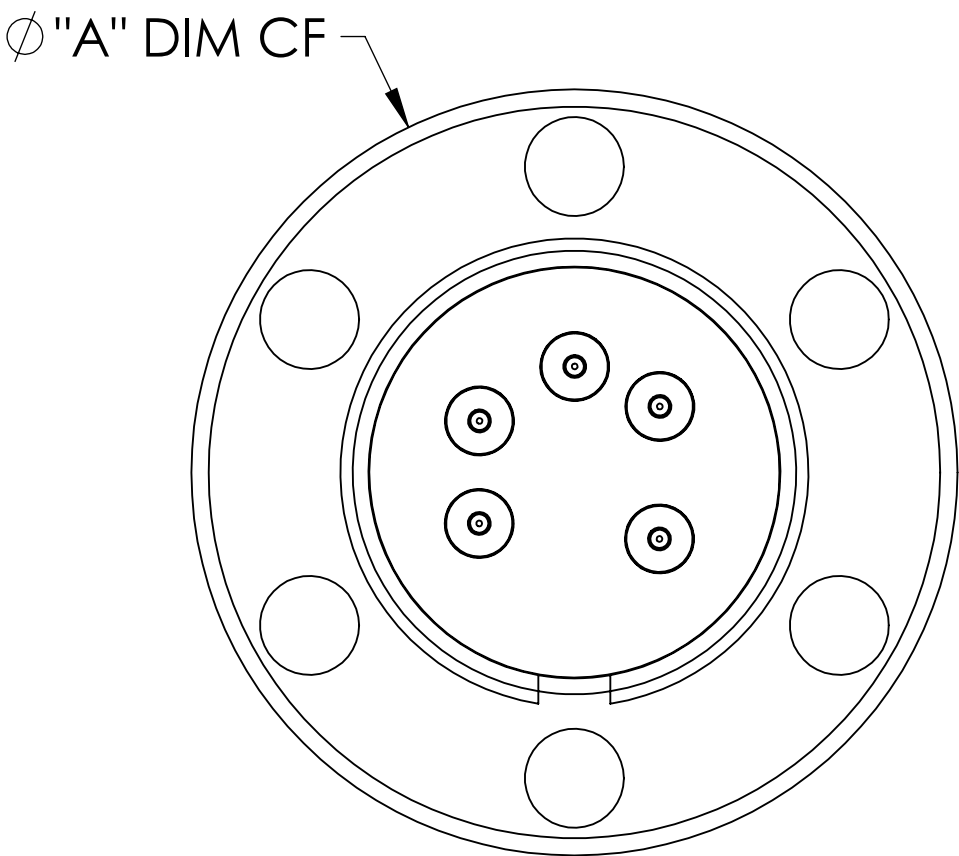


MPF PRODUCTS INC.

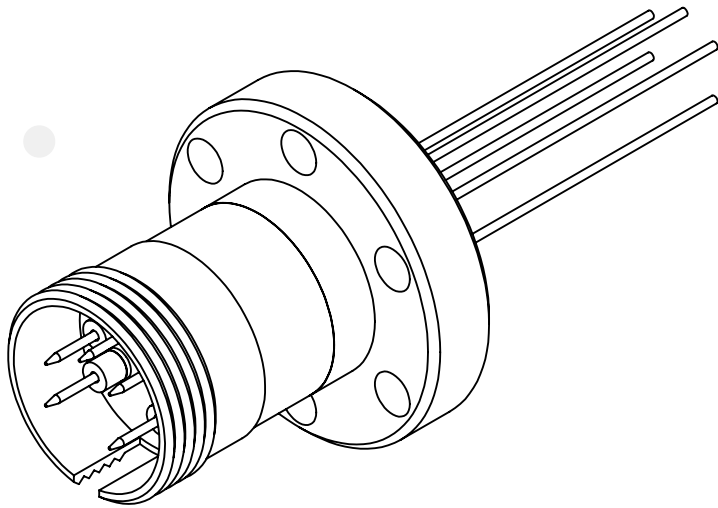




PART#	# OF PINS	"A" DIM	"B" DIM
A1620-1-CF	5	1.33	1.34
A1620-2-CF	5	2.75	.89
A1620-3-CF	7	1.33	1.34
A1620-4-CF	7	2.75	.89

SPECIFICATIONS:

- 1. VOLTAGE: 500 VOLTS DC
- 2. CURRENT: 3.5 AMPS PER PIN
- 3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
- 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

Multipin Feedthrough, 500 Volts, 3.5 Amps per Pin, w/ Air-side Connector, Conflat Flange

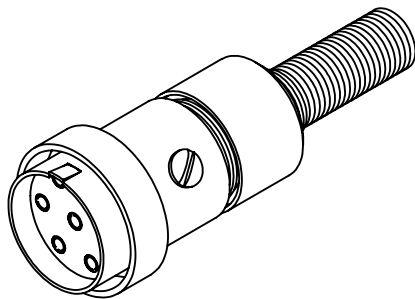

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A			
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC. TITLE: MULTIPIN, 500V, 3.5 A, CONFLAT FLANGE DOWNLOADED FROM MPFPI.COM DWG. NO. A1620 REV		
		DRAWN	WJ	9/11/2015			
		CHECKED		9/11/2015			
		ENG APPR.	WJ	9/11/2015			
MATERIAL		THIRD ANGLE:					
		APPLICATION					
		NEXT ASSY					USED ON
FINISH		SURFACE FINISH:  63 OR BETTER				A1620	
PLATING		UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES					
Thursday, February 7, 2019 8:39:53 AM							