



MPF PRODUCTS INC.



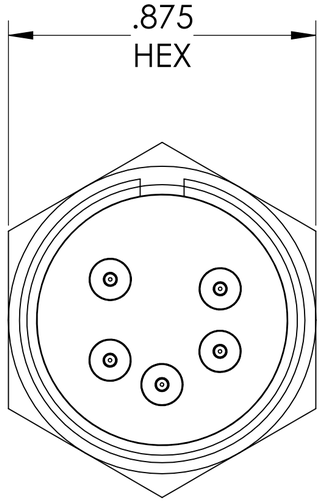

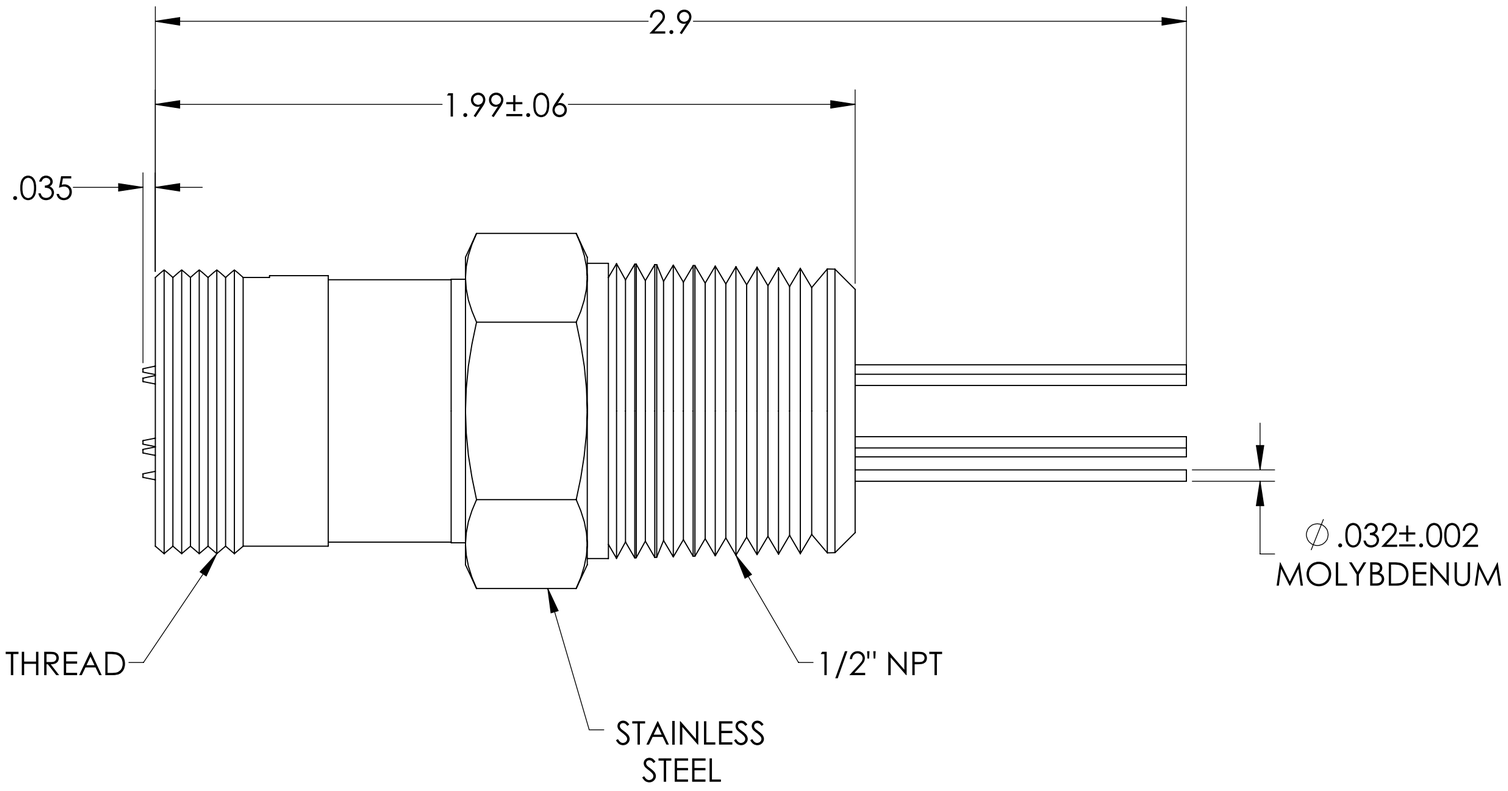



SPECIFICATIONS:
1. VOLTAGE: 500 VOLTS DC
2. CURRENT: 3.5 AMPS PER PIN
3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
4. LEAK RATE < 1X10-9 ATM CC/SEC HE

Multipin Feedthrough, 5 Pins, 500 Volts, 3.5 Amps per Pin, 0.032" Dia Conductors, 0.5" NPT

UNLESS OTHERWISE SPECIFIED:	QUOTATION # N/A		
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015		NAME	DATE
	DRAWN	WJ	9/11/2015
	CHECKED		9/11/2015
	ENG APPR.	WJ	9/11/2015
MATERIAL	THIRD ANGLE:		MPF PRODUCTS INC.
	APPLICATION NEXT ASSY / USED ON		TITLE: MULTIPIN, 5 PINS, 500V, 3.5 A, 1/2" NPT
FINISH	SURFACE FINISH: 63 OR BETTER		DWG. NO. A1624-1-NPT / REV
PLATING	UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Monday, January 28, 2019 9:11:22 AM

DOWNLOADED FROM MPFPI.COM

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MPF PRODUCTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MPF PRODUCTS INC. IS PROHIBITED.