
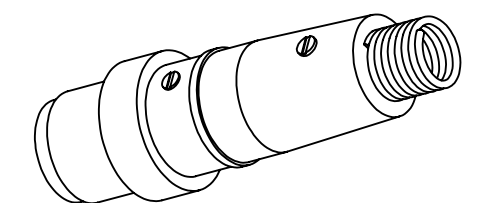
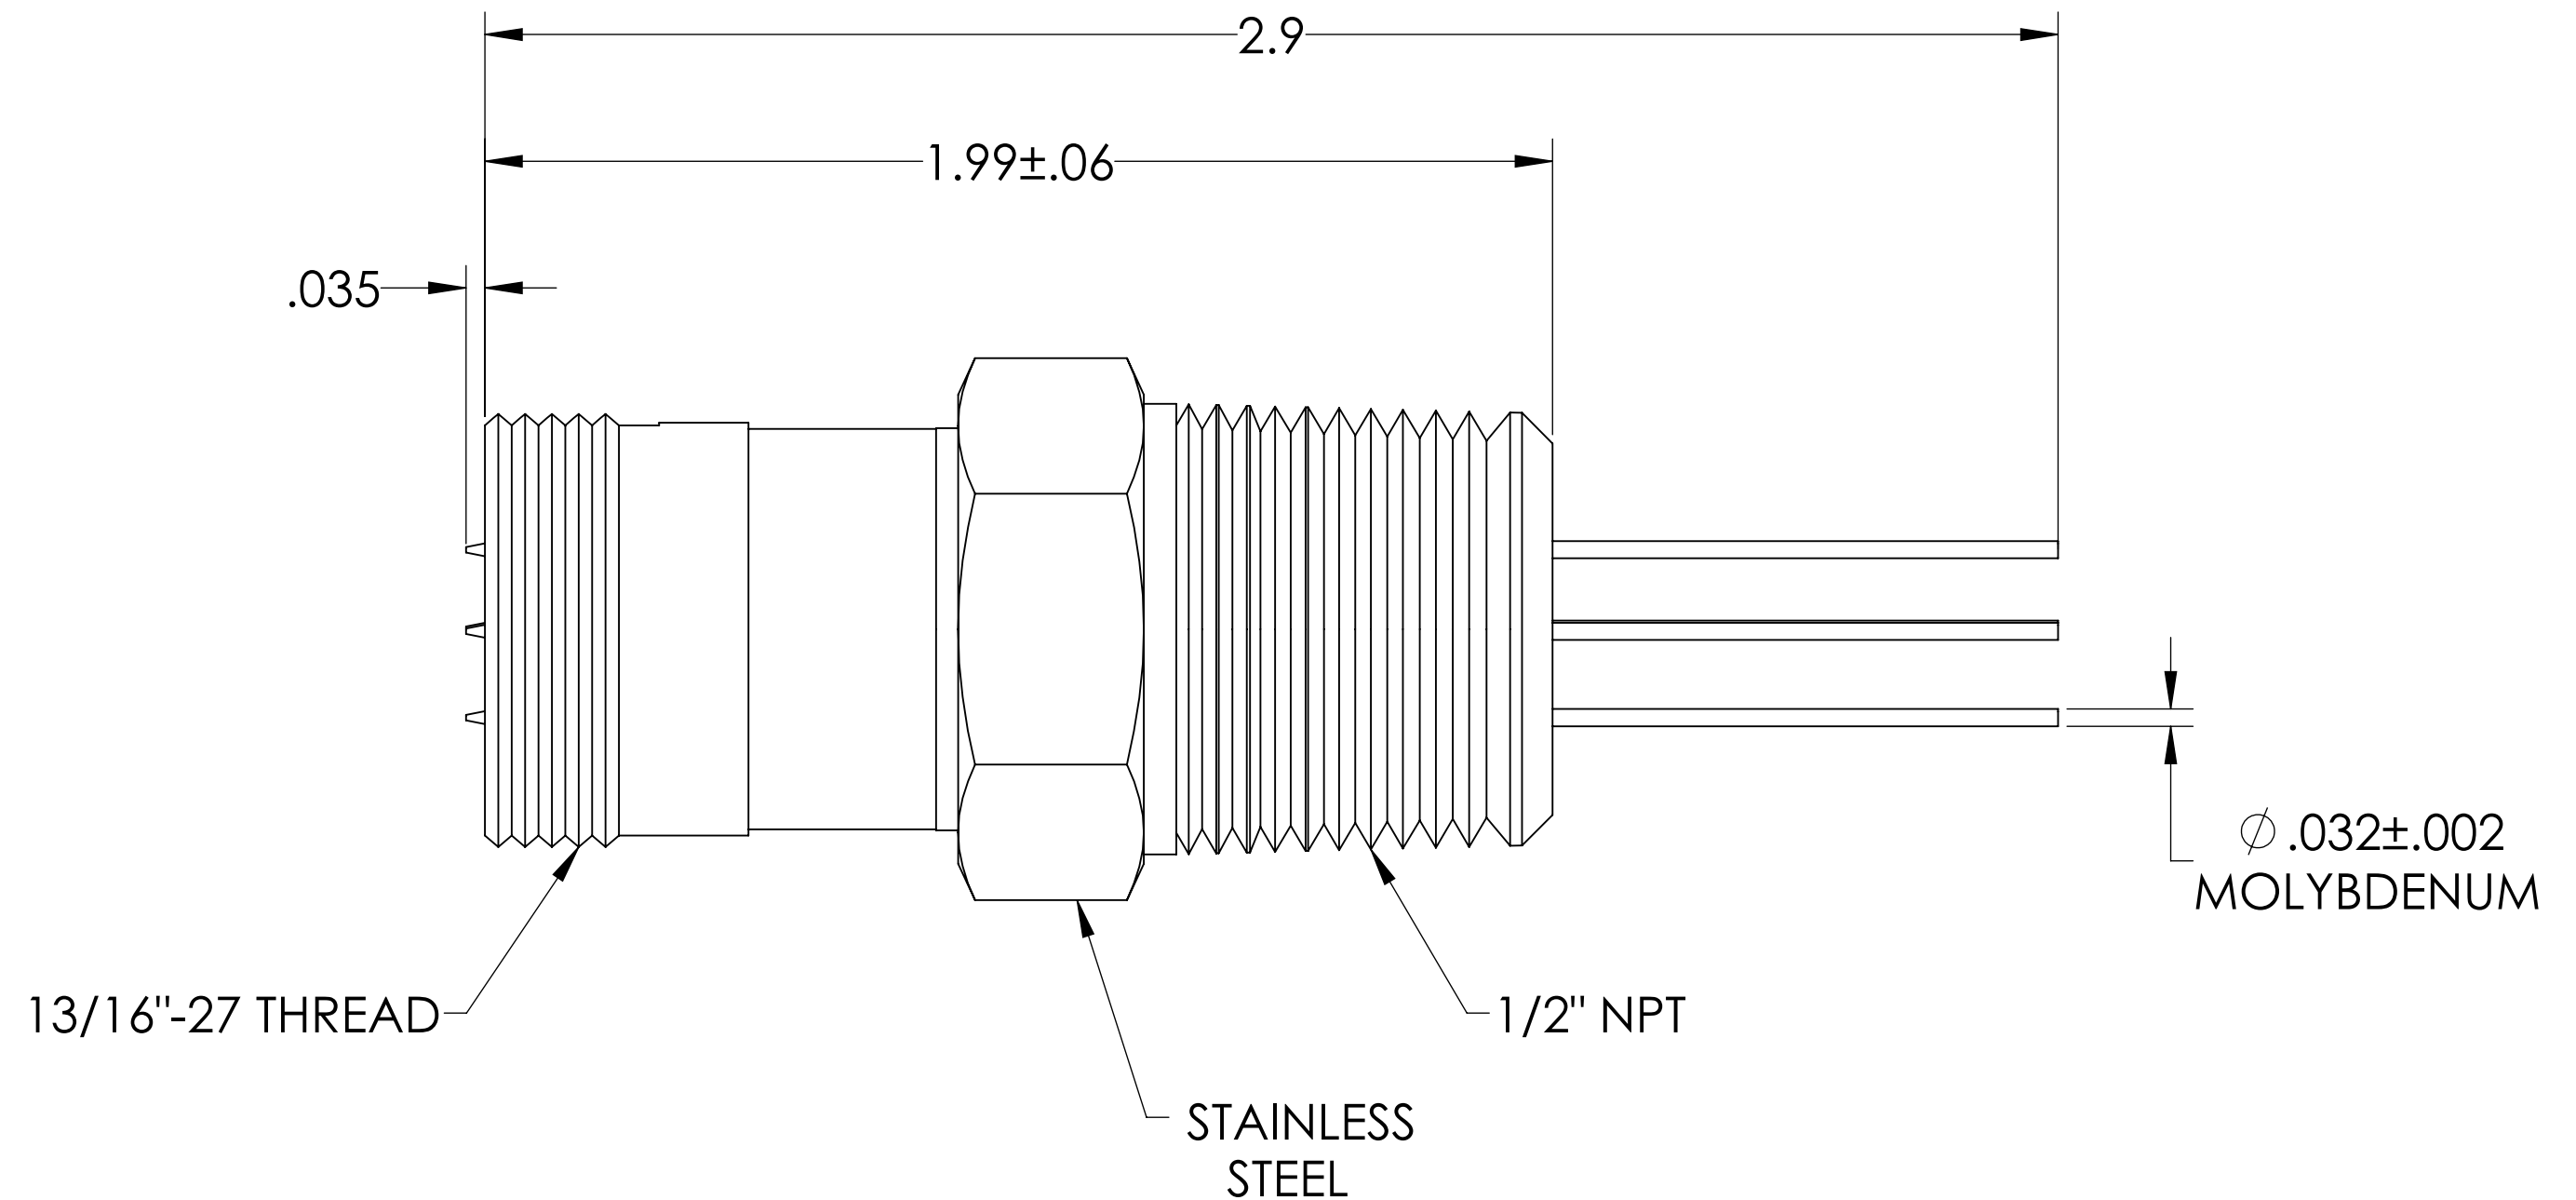
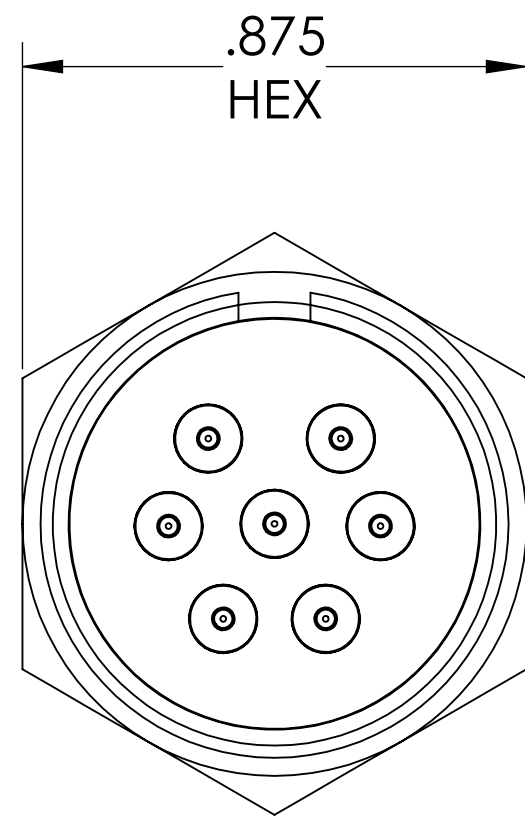


MPF PRODUCTS INC.

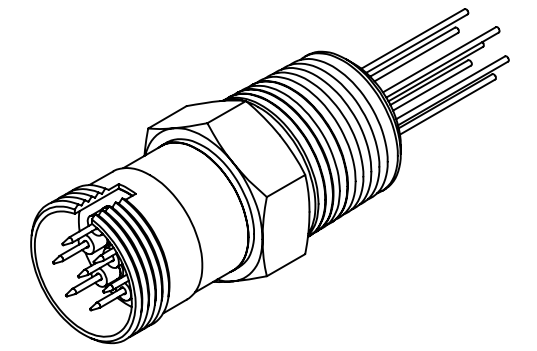

SPECIFICATIONS:

1. VOLTAGE: 500 VOLTS DC
2. CURRENT: 3.5 AMPS PER PIN
3. TEMPERATURE RATING: -100 TO 450°C WITHOUT CONNECTOR
4. LEAK RATE < 1X10-9 ATM CC/SEC HE

Multipin Feedthrough, 7 Pins, 500 Volts, 3.5 Amps per Pin, 0.032" Dia Conductors, 0.5" NPT

| | | | | | |
|---|--|---|-----------|--|--|
| UNLESS OTHERWISE SPECIFIED: | | QUOTATION # | | N/A | |
| DIMENSIONS ARE IN INCHES TOLERANCES: | | NAME | DATE | MPF PRODUCTS INC. | |
| ANGULAR: MACH ± 1/2° | | DRAWN | 9/11/2015 | | |
| TWO PLACE DECIMAL ± .030 | | CHECKED | 9/11/2015 | | |
| THREE PLACE DECIMAL ± .015 | | ENG APPR. | 9/11/2015 | | |
| MATERIAL | | THIRD ANGLE: | | MULTIPIN, 7 PINS, 500V, 3.5 A, 1/2" NPT | |
| FINISH | | APPLICATION | | | |
| PLATING | | NEXT ASSY USED ON | | | |
| SURFACE FINISH: 63/ OR BETTER | | SURFACE FINISH: 63/ OR BETTER | | DOWNLOADED FROM MPFPI.COM | |
| UNLESS OTHERWISE SPECIFIED: | | UNLESS OTHERWISE SPECIFIED: | | DWG. NO. A1624-2-NPT | |
| ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES | | ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES | | REV | |
| | | | | Monday, January 28, 2019 9:09:57 AM | |