


MPF PRODUCTS INC.

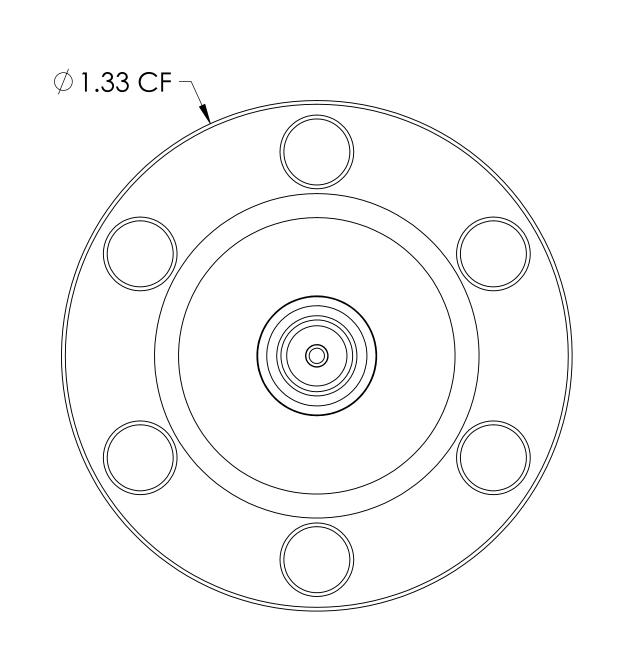

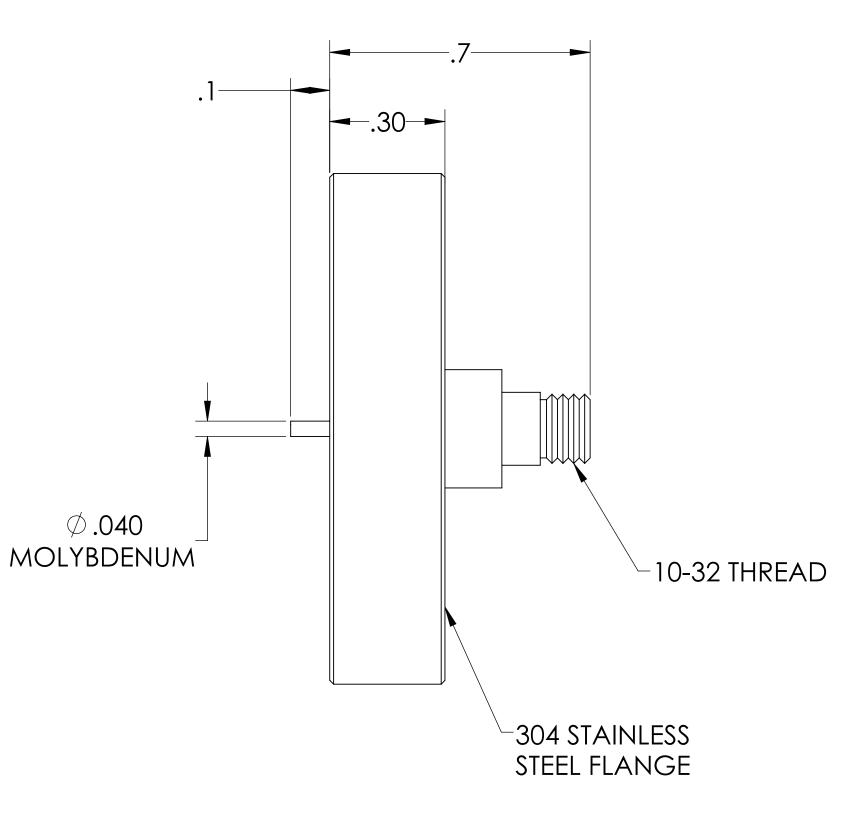

PART #	AIRSIDE CONNECTOR INCLUDED
A1648-1-CF	YES
A1648-2-CF	NO



NOTE:

SHIELD: GROUNDED
VOLTAGE: 500 VOLTS DC

3. CURRENT: 2 AMPS

4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)

5. IMPEDANCE: NON-CONSTANT

Microdot Coaxial Feedthrough, 1 Pin, Grounded Shield, 1.33" Conflat Flange, UHV Compatible

			.,.		1				
UNLESS OTHERWISE SPECIFIED:	QUOTATION #								
DIMENSIONIS ARE IN INICUES				√/A					
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	.	MADE DOODLICTS I				
	DRAWN	WJ	9/11/2015	MPF PRODUCTS INC				VC.	
	CHECKED		9/11/2015	TITL	.E:				
ANGULAR: MACH±1/2° TWO PLACE DECIMAL ± .030	ENG APPR.	WJ	9/11/2015	MICRODOT COAXIAL					
THREE PLACE DECIMAL ± .015	THIRD ANGLE:								
				FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, 1.33" CONFLAT FLANGE					
MATERIAL	$\neg + + + + + + + + + + + + + + + + + + +$								
	APPLICATION								
	NEXT ASSY		USED ON						
				DOV	WNLOA	ADED FRO	M MPFPI.CO	М	
FINISH	SURFACE FINIS	6H: 6	3 OR BETTER	DWC	G. NO.			REV	
	UNLESS OTHERWISE SPECIFIED:			A1648					
PLATING	ALL DIAMETERS	ALL DIAMETERS CONCENTRIC WITHIN .005.							
	REMOVE ALL BURRS AND SHARP EDGES			Friday, January 18, 2019 9:31:56 AM					
SHEET 1 OF 1									