

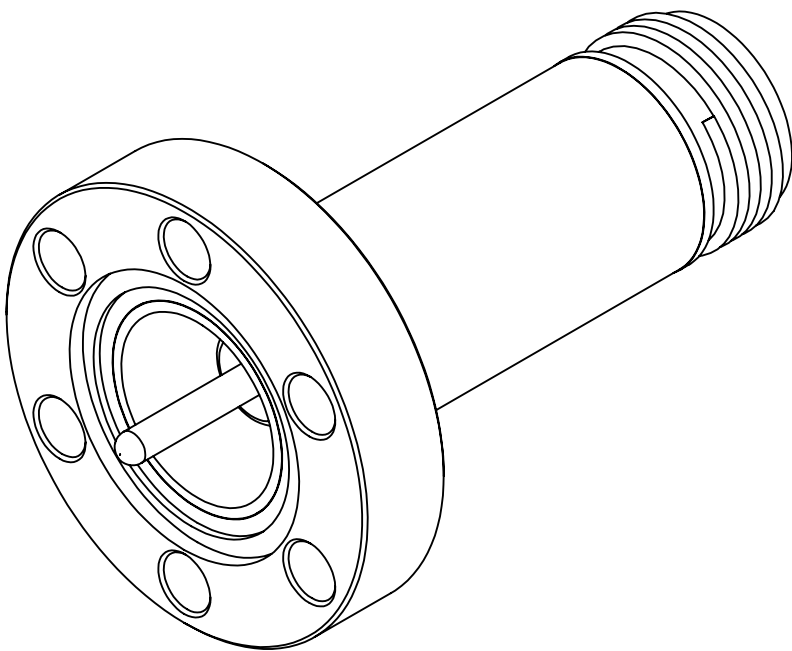
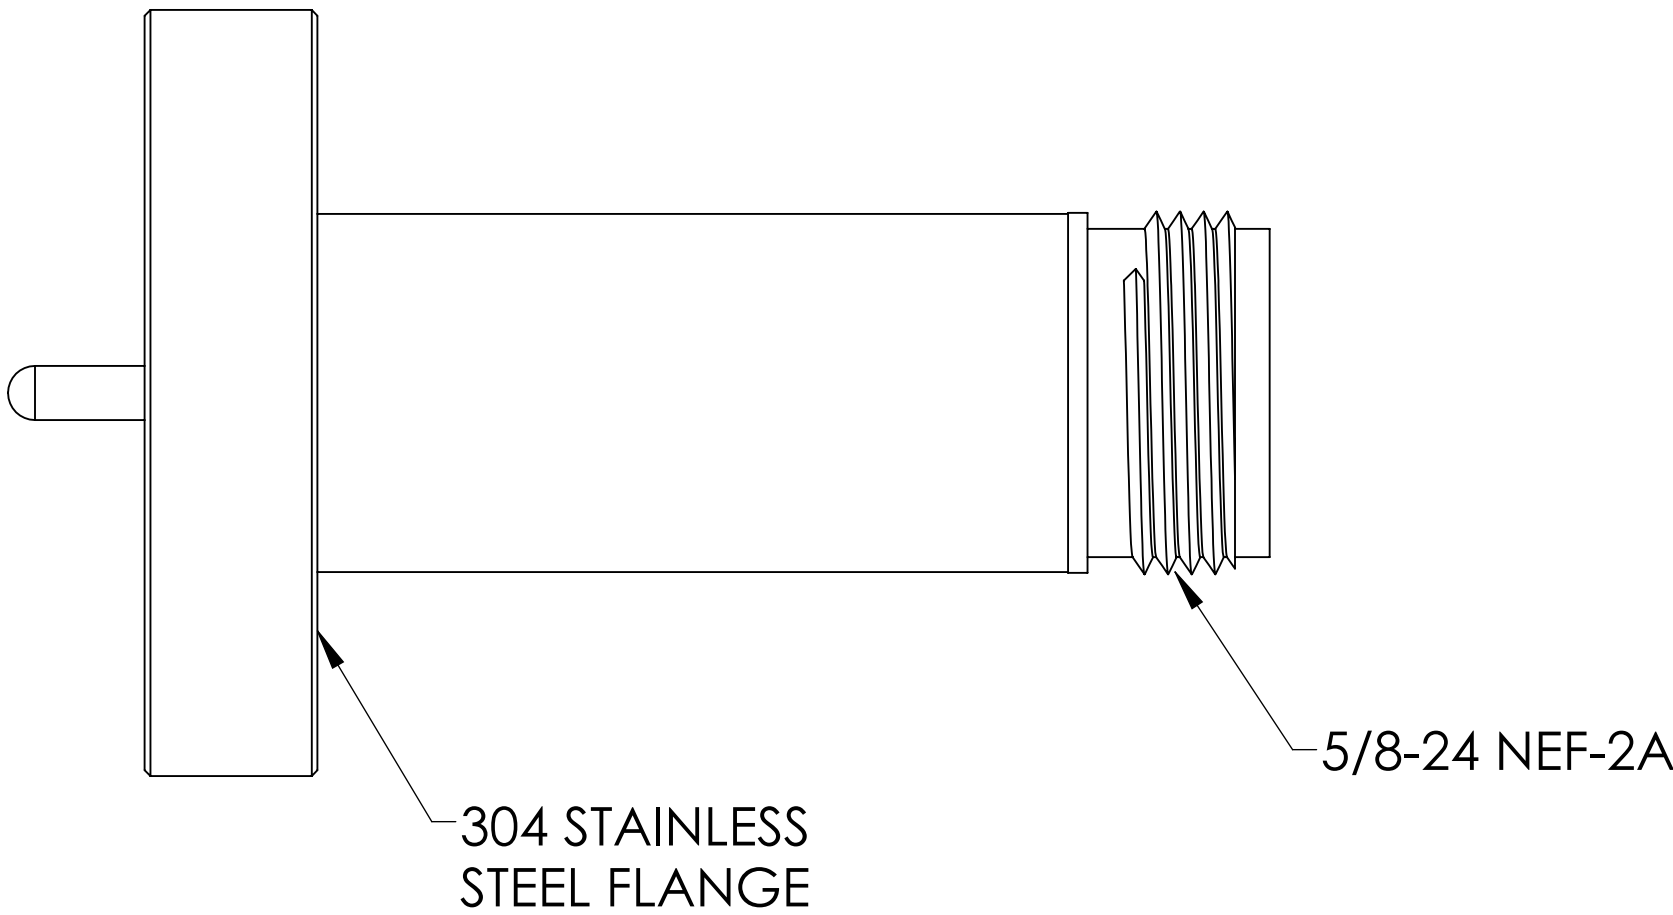


MPF PRODUCTS INC.

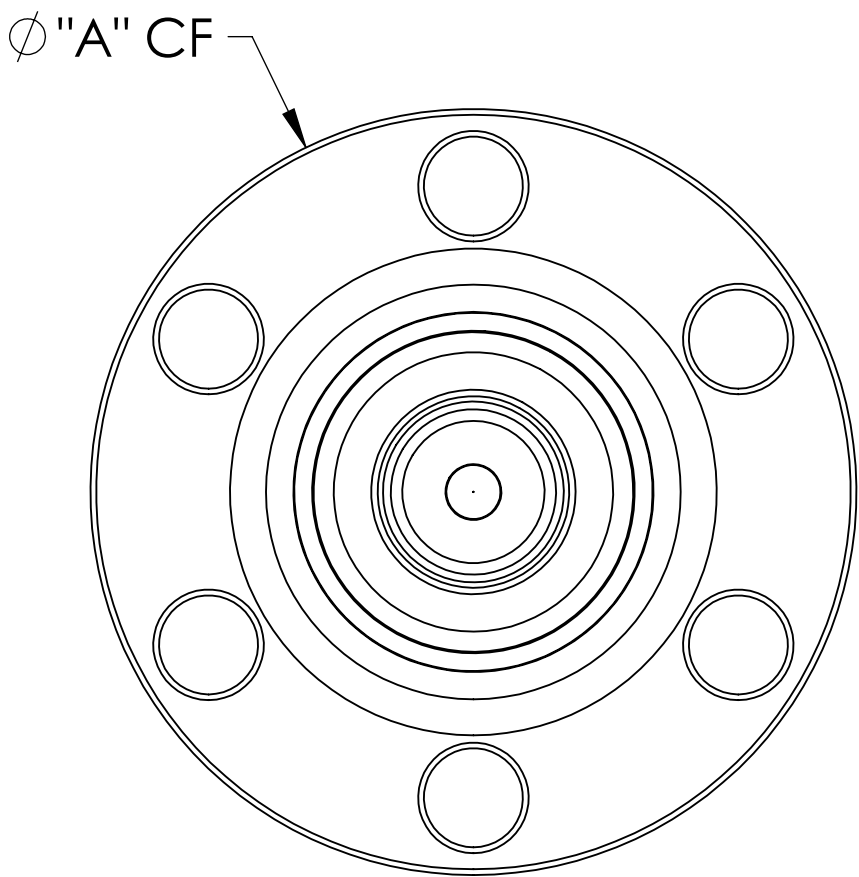

PART #	Ø "A"	AIRSIDE CONNECTOR INCLUDED
A1706-1-CF	1.33	YES
A1706-2-CF	2.75	YES
A1706-3-CF	1.33	NO
A1706-4-CF	2.75	NO



- NOTE:
- 1. SHIELD: GROUNDED
 - 2. VOLTAGE: 500 VOLTS DC
 - 3. CURRENT: 3 AMPS
 - 4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
 - 5. IMPEDANCE: NON-CONSTANT

Type-N Coaxial Feedthrough, 1 Pin, Grounded Shield, Conflat Flange, UHV Compatible

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		DRAWN	NAME	DATE	MPF PRODUCTS INC. TITLE: TYPE-N COAXIAL FEEDTHROUGH, 1 PIN, GROUNDED SHIELD, CONFLAT FLANGE DOWNLOADED FROM MPFPI.COM DWG. NO. A1706 REV
ANGULAR: MACH ± 1/2°		CHECKED	WJ	9/11/2015	
TWO PLACE DECIMAL ± .030		ENG APPR.	WJ	9/11/2015	
THREE PLACE DECIMAL ± .015		THIRD ANGLE:			
MATERIAL					
		APPLICATION			
		NEXT ASSY			USED ON
FINISH		SURFACE FINISH: 63/ OR BETTER			
PLATING		UNLESS OTHERWISE SPECIFIED:			
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			Friday, January 18, 2019 9:18:43 AM