
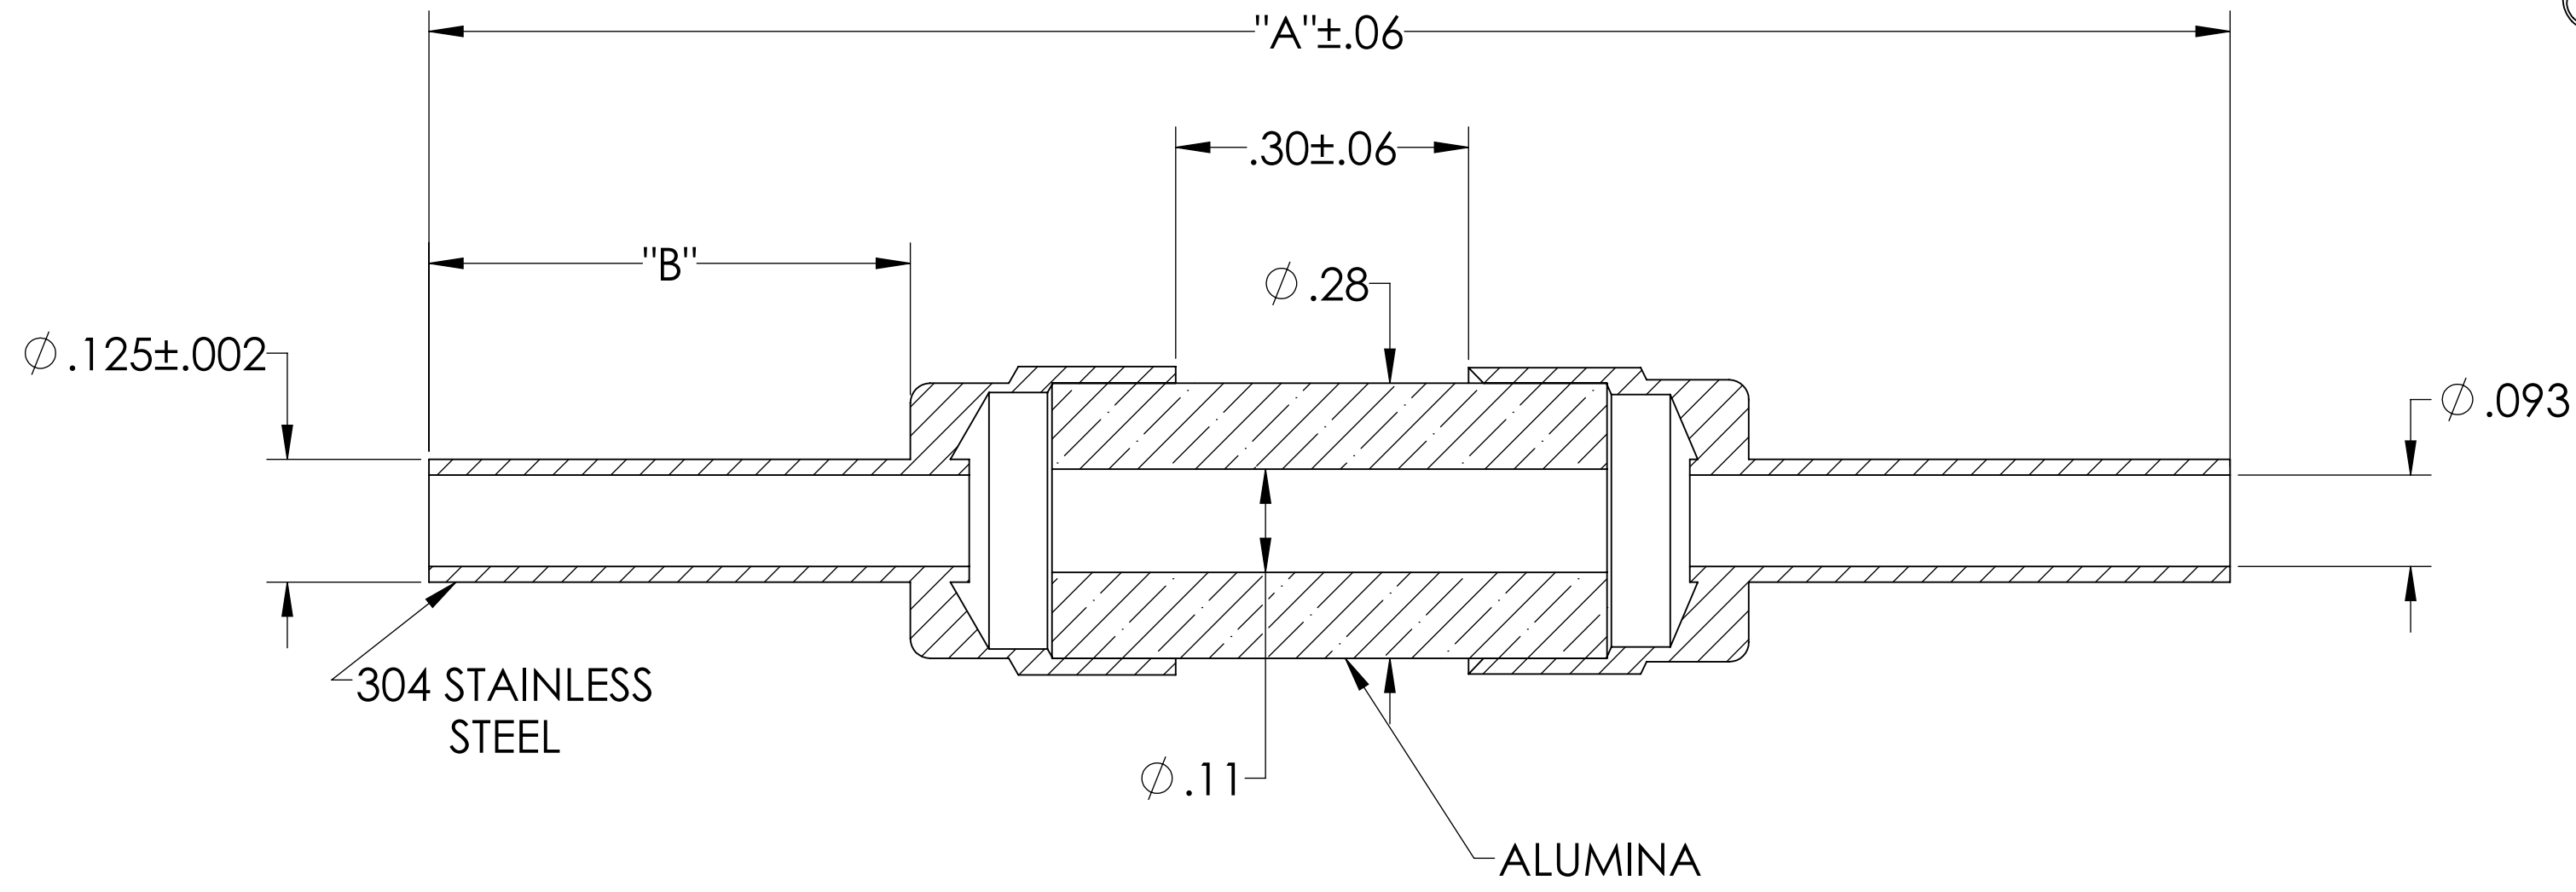


MPF PRODUCTS INC.

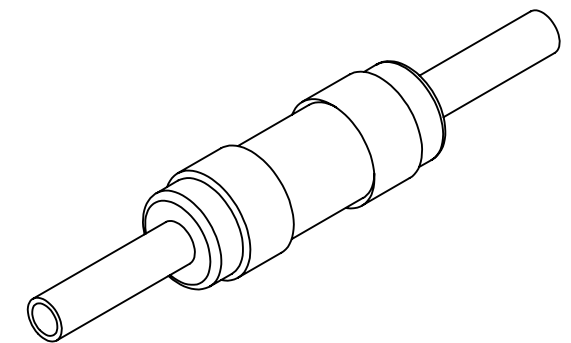

PART #	"A" ±.060	"B"
A1886-1-W	1.80	.475
A1886-2-W	2.30	.725
A1886-3-W	2.85	1.000

SPECIFICATIONS:

1. VOLTAGE: 5KV
2. TEMPERATURE: -200°C TO 450°C
3. LEAK RATE < 1X10⁻⁹ ATM CC/SEC HE

Break, 5KV Isolation, 0.125" Dia Stainless Steel Tube Adapters, UHV Compatible

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC.	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		TITLE: BREAK, 5KV ISOLATION, 0.125" DIA STAINLESS STEEL TUBE ADAPTERS DWG. NO. A1886	
FINISH					
PLATING		APPLICATION: NEXT ASSY: USED ON:			
SURFACE FINISH:		63/ OR BETTER		DOWNLOAD FROM MPFPI.COM Tuesday, October 8, 2019 11:08:38 AM	
UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV	