



MPF PRODUCTS INC.

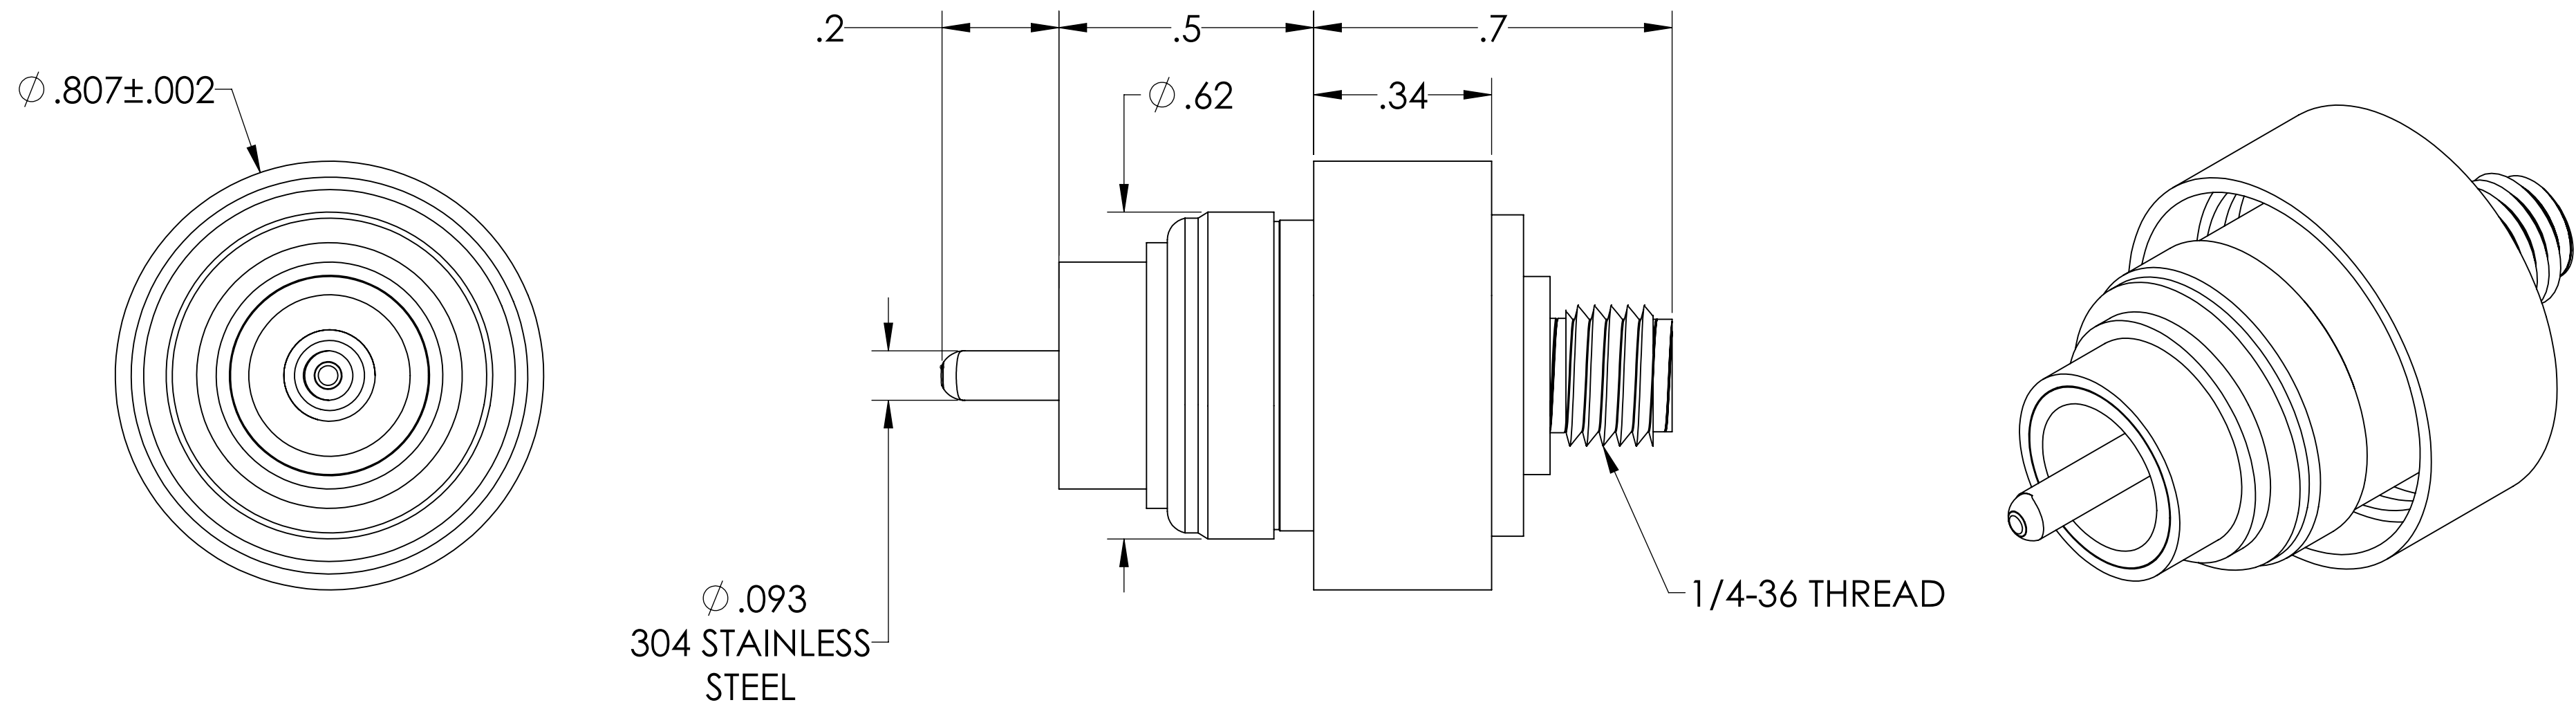

PART #	AIRSIDE CONNECTOR INCLUDED
A1980-1-W	YES
A1980-2-W	NO

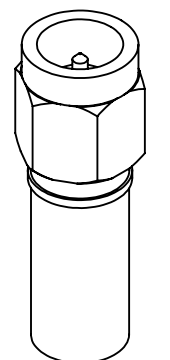

NOTE:

1. SHIELD: FLOATING
2. VOLTAGE: 2500 VOLTS DC SHIELD TO GROUND, 700V PIN TO SHEILD
3. CURRENT: 1 AMP
4. TEMPERATURE RATING: -200 TO 450°C (FEEDTHROUGH), 65 TO 165°C (AIRSIDE CONNECTOR)
5. IMPEDANCE: NON-CONSTANT

SMA Coaxial Feedthrough, 1 Pin, Floating Shield, Double Ended 0.807" Dia SS Weld Adapter, UHV Compatible

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC. TITLE: SMA COAXIAL FEEDTHROUGH, 1 PIN, FLOATING SHIELD, DOUBLE ENDED, 0.807" DIA SS WELD ADAPTER DOWNLOADED FROM MPFPI.COM	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		DWG. NO.	
APPLICATION				REV	
NEXT ASSY		USED ON		A1980	
FINISH		SURFACE FINISH: 63/ OR BETTER		Friday, January 18, 2019 9:07:13 AM	
PLATING		UNLESS OTHERWISE SPECIFIED:			
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES			