
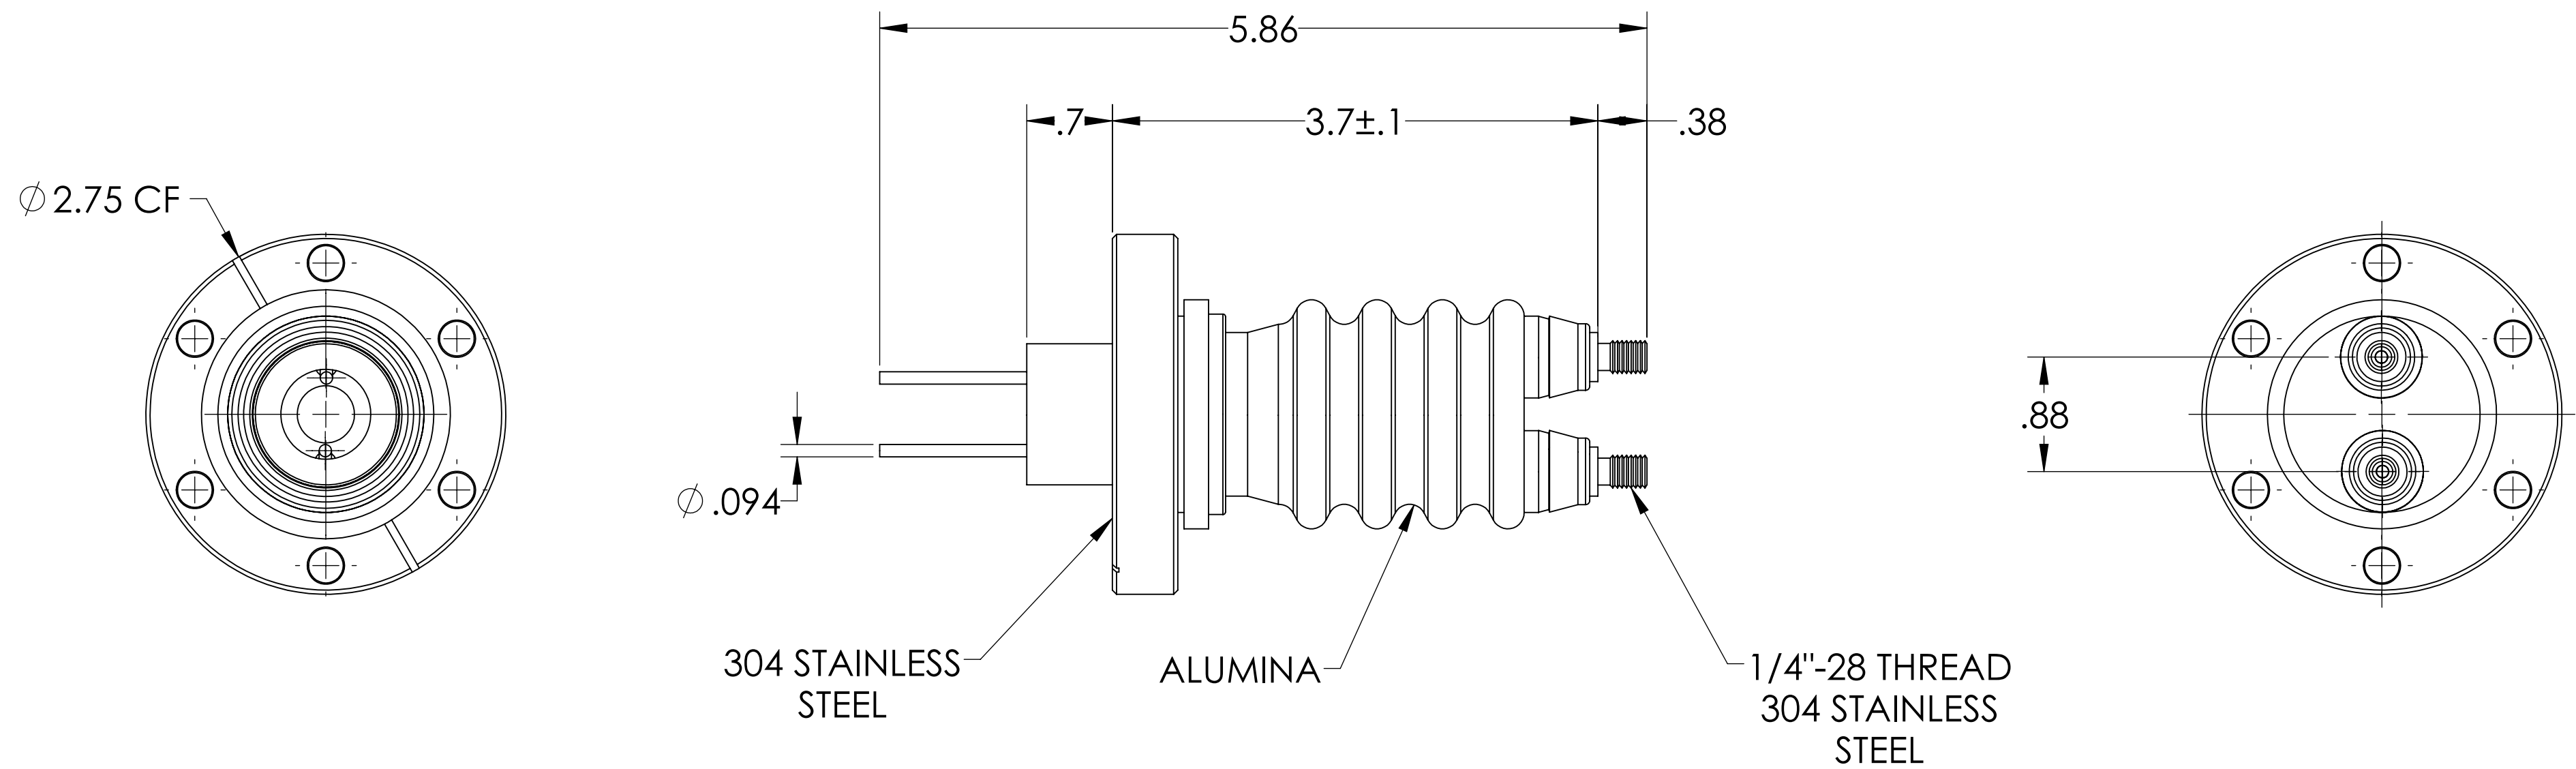


MPF PRODUCTS INC.

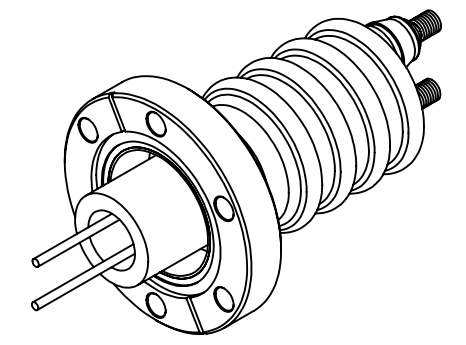

NOTE:

1. VOLTAGE: 30,000 VOLTS DC PIN TO GROUND, 6KV PIN TO PIN
2. CURRENT: 50 AMPS
3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 30KV, 50 Amps, 2 Pins, 0.094" Copper Conductors, 2.75" Conflat Flange, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:	QUOTATION #		N/A
DIMENSIONS ARE IN INCHES TOLERANCES:	NAME	DATE	MPF PRODUCTS INC.
ANGULAR: MACH ± 1/2°	DRAWN	9/11/2015	
TWO PLACE DECIMAL ± .030	CHECKED	9/11/2015	
THREE PLACE DECIMAL ± .015	ENG APPR.	WJ 9/11/2015	
MATERIAL	THIRD ANGLE:		POWER FEEDTHROUGH, 30KV, 2 PINS, 2.75" CONFLAT FLANGE
	APPLICATION		
	NEXT ASSY	USED ON	DOWNLOADED FROM MPFPI.COM
FINISH	SURFACE FINISH: 63/ OR BETTER		DWG. NO.
PLATING	UNLESS OTHERWISE SPECIFIED:		A2089-1-CF
	ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		REV
	Tuesday, January 22, 2019 1:05:48 PM		