
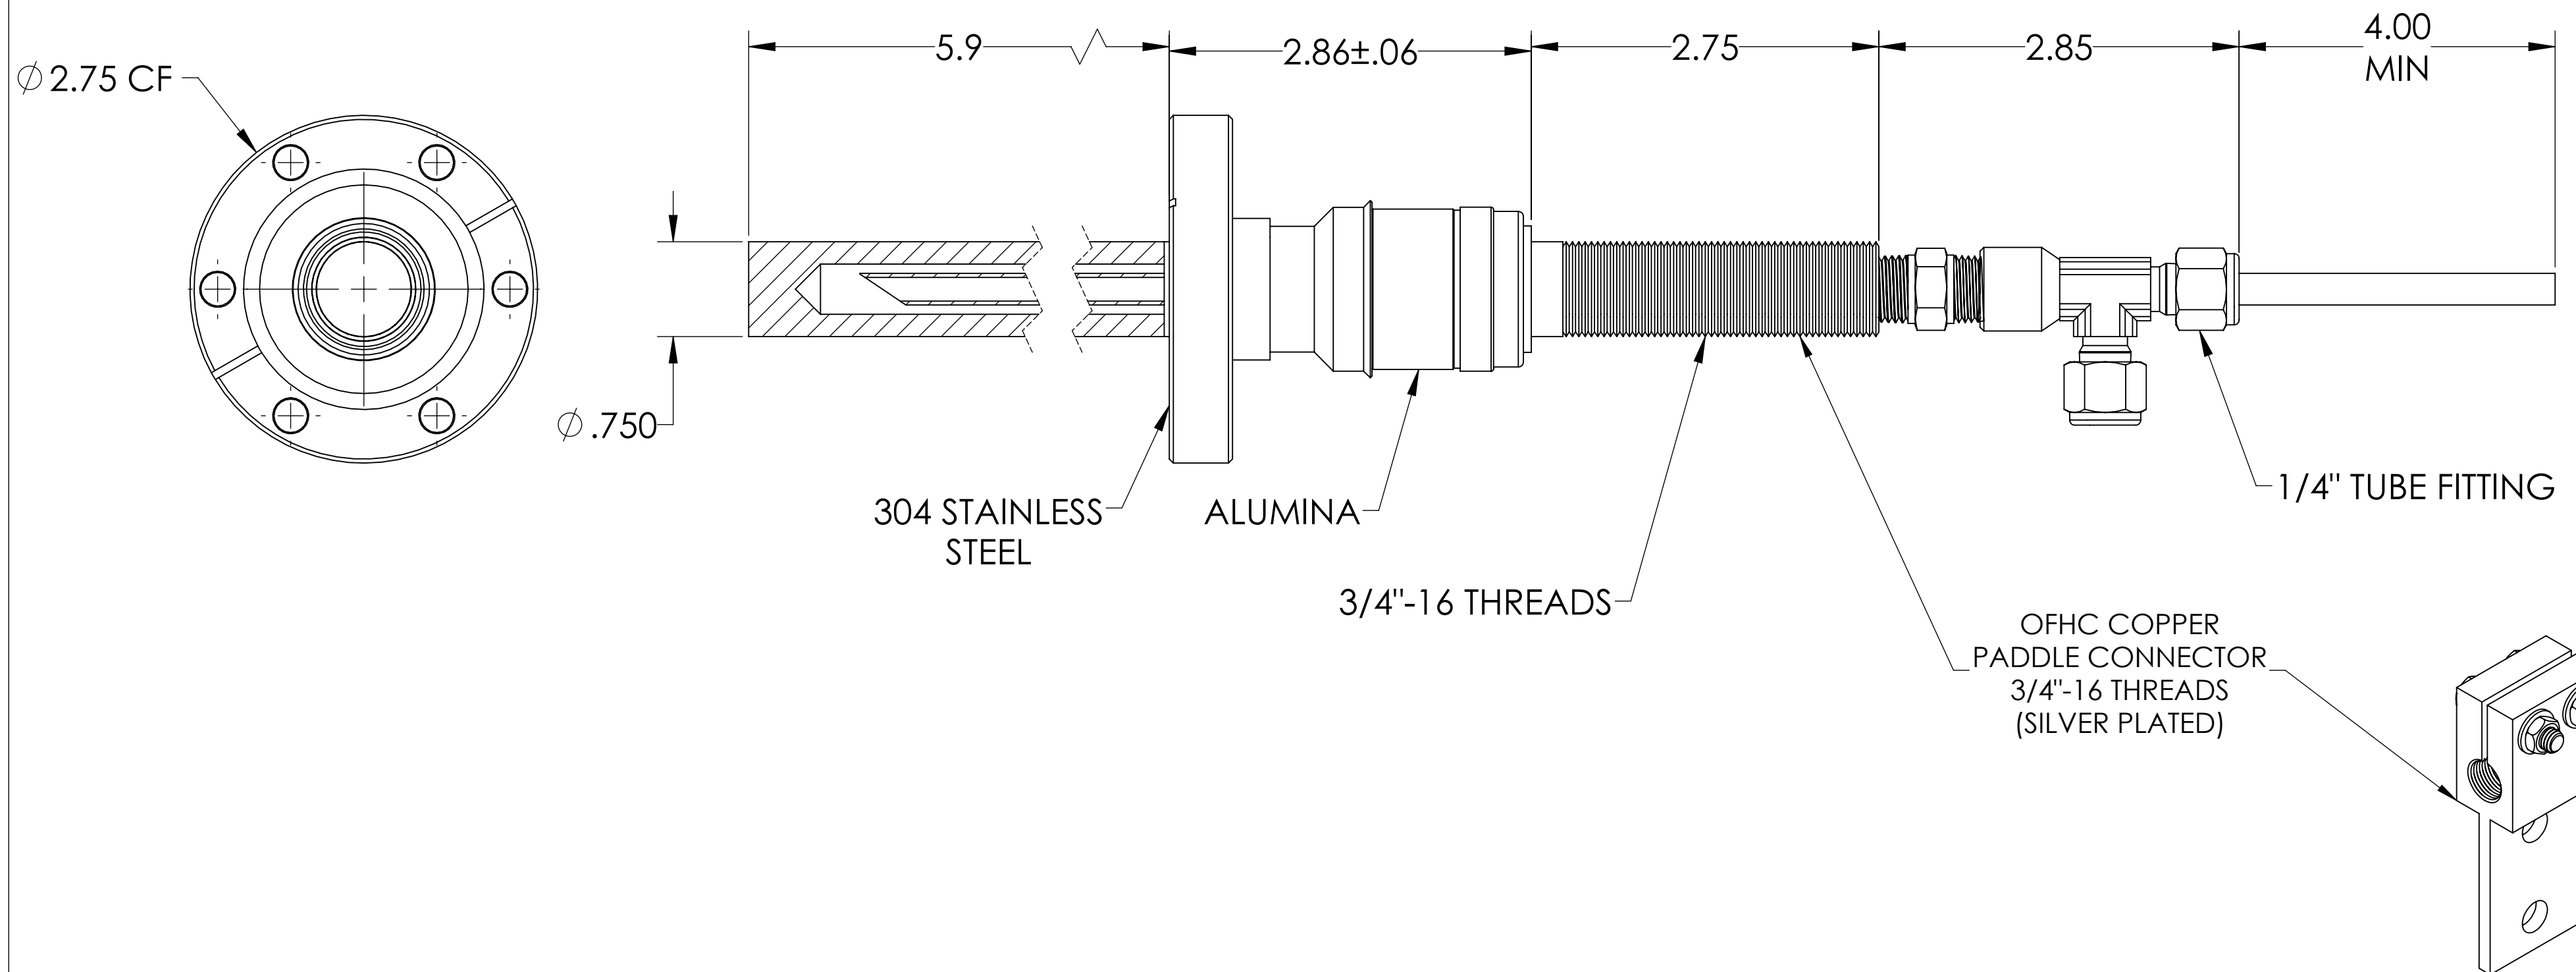


# MPF PRODUCTS INC.

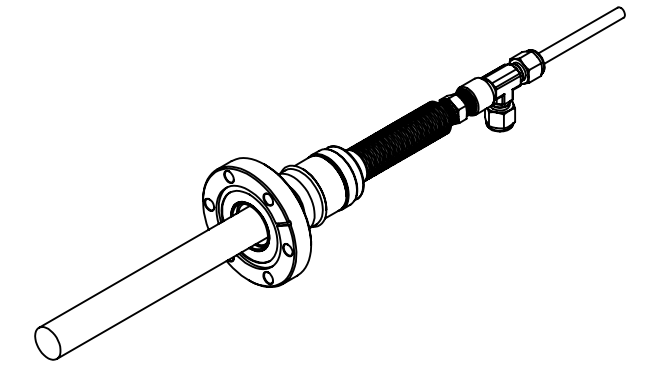

**NOTE:**

1. VOLTAGE: 8000 VOLTS DC
2. CURRENT: 1000 AMPS
3. TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough, 8000 Volts, 1000 Amps, 1 Pin, 0.750" Copper Conductor, Water Cooled W/ T-Fitting, 2.75" Conflat Flange, UHV Rated, Bakeable to 450°C

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A		
DIMENSIONS ARE IN INCHES		NAME	DATE	MPF PRODUCTS INC.		
TOLERANCES:		DRAWN	WJ			9/11/2015
ANGULAR: MACH ± 1/2"		CHECKED	WJ			9/11/2015
TWO PLACE DECIMAL ± .030		ENG APPR.	WJ			9/11/2015
THREE PLACE DECIMAL ± .015		THIRD ANGLE:		TITLE: POWER FEEDTHROUGH, 8000 VOLTS, 1000 AMPS, 1 PIN, WATER COOLED, 2.75" CONFLAT FLANGE		
MATERIAL						
FINISH		APPLICATION NEXT ASSY      USED ON				
PLATING		SURFACE FINISH: 63 OR BETTER		DWG. NO.      REV A2100-1-CF		
UNLESS OTHERWISE SPECIFIED:		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		DOWNLOADED FROM MPFPI.COM Thursday, July 16, 2020 3:55:44 PM		