
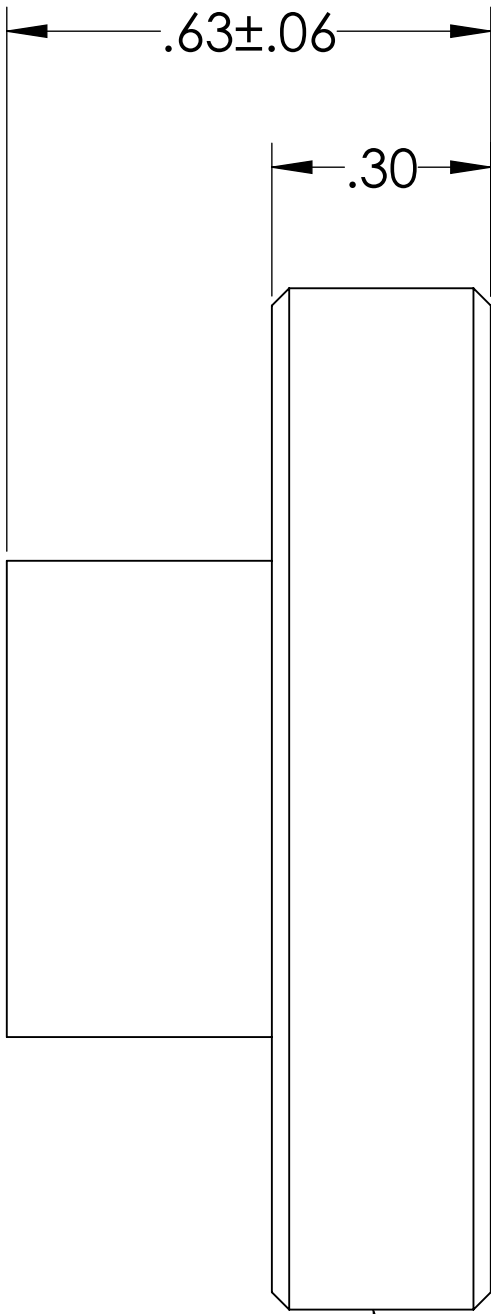
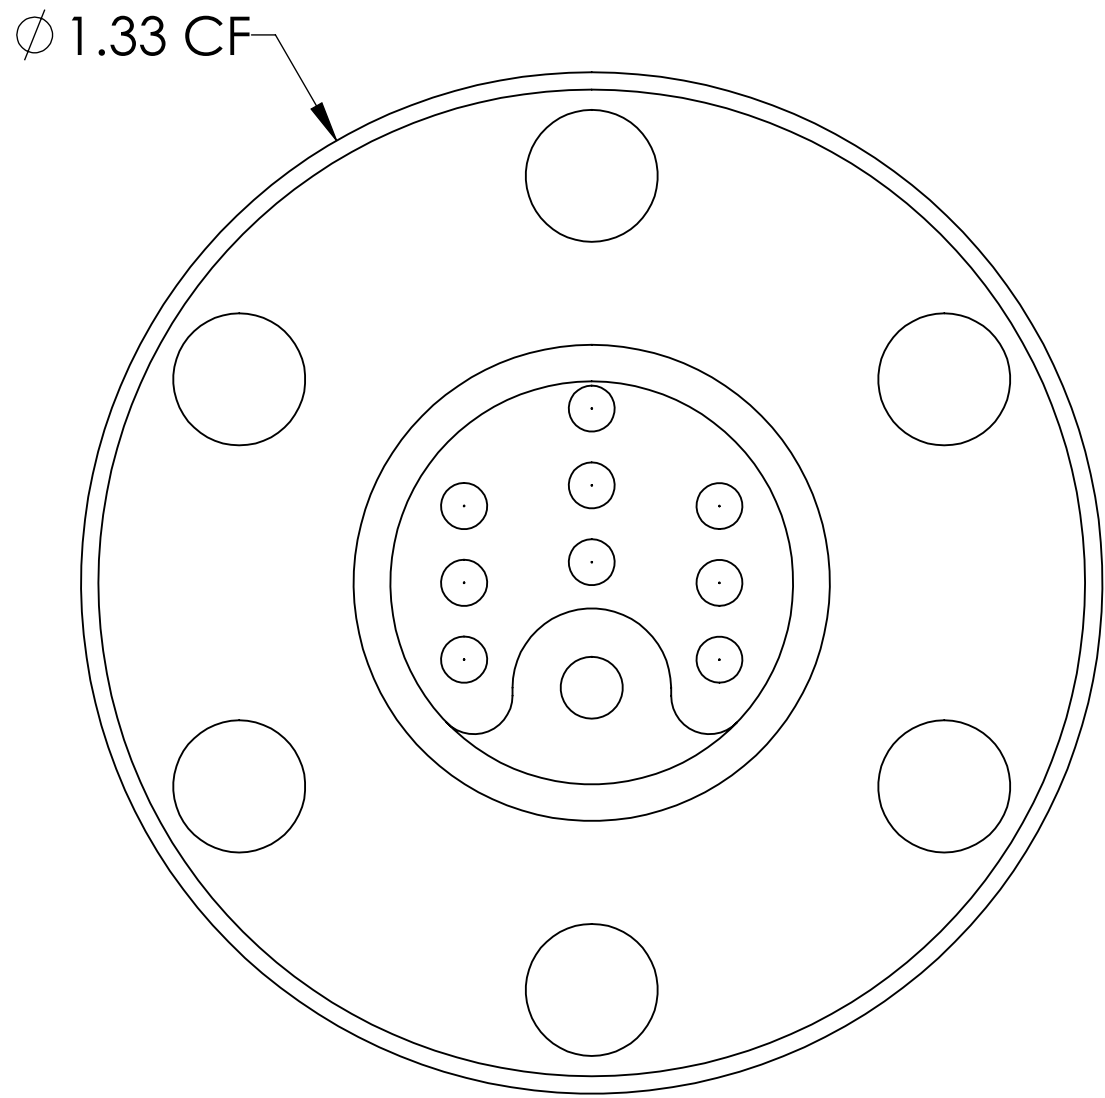


MPF PRODUCTS INC.

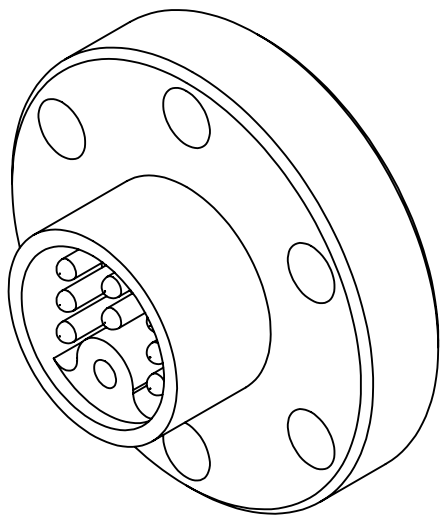


304 STAINLESS
STEEL FLANGE

SPECIFICATIONS:

- 1. VOLTAGE: 700 VOLTS DC
- 2. CURRENT: 5 AMPS PER PIN
- 3. TEMPERATURE RATING: -200 TO 450°C WITHOUT CONNECTOR
- 4. LEAK RATE < 1X10-9 ATM CC/SEC HE

Subminiature C-type Multipin Feedthrough, 9 Pins, 500 Volts, 5 Amps per Pin, 1.33" Conflat Flange

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A		
DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1/2° TWO PLACE DECIMAL ± .030 THREE PLACE DECIMAL ± .015			NAME	DATE	MPF PRODUCTS INC. TITLE: MULTIPIN, TYPE-C, 500V, 5A, 9 PIN, 133CF DOWNLOADED FROM MPFPI.COM	
		DRAWN	WJ	9/11/2015		
		CHECKED		9/11/2015		
		ENG APPR.	WJ	9/11/2015		
MATERIAL		THIRD ANGLE:			DWG. NO.	
						REV
		APPLICATION				
FINISH		NEXT ASSY			A2140-1-CF	
		USED ON				
PLATING		SURFACE FINISH:			Thursday, February 7, 2019 8:39:37 AM	
		63 OR BETTER				
		UNLESS OTHERWISE SPECIFIED:				
		ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES				