



MPF PRODUCTS INC.

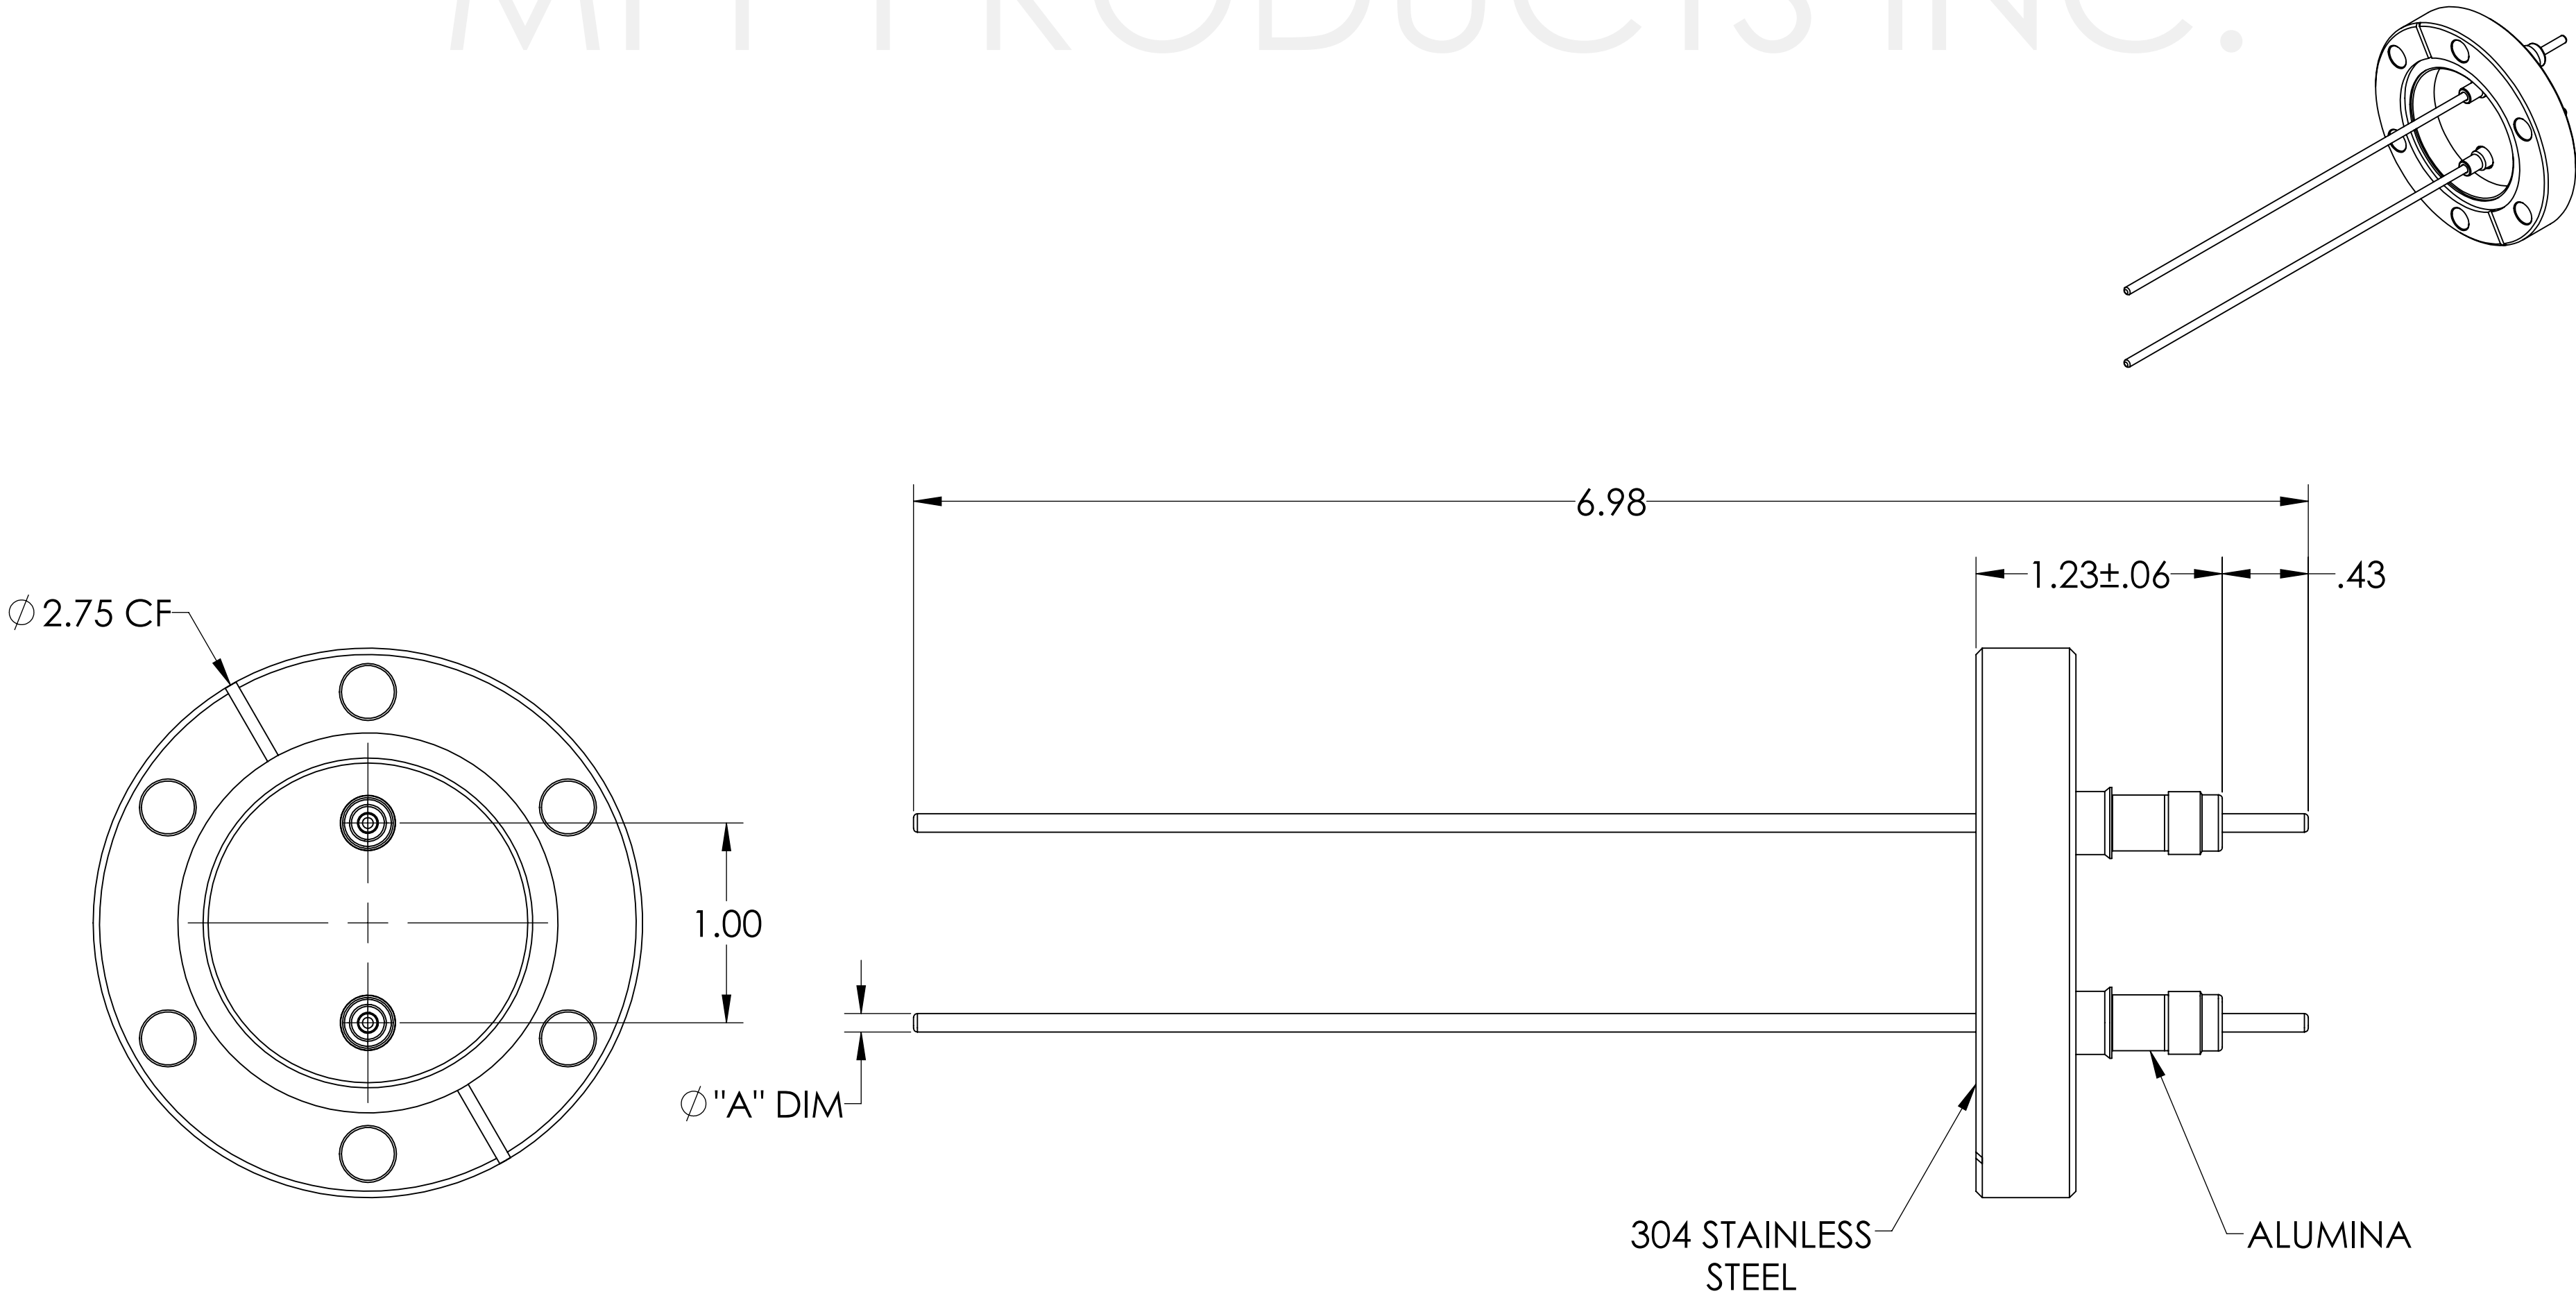

| PART #     | CONDUCTOR MATERIAL | "A" DIM | CURRENT RATING |
|------------|--------------------|---------|----------------|
| A2207-1-CF | OFHC COPPER        | 0.094   | 30 AMPS        |
| A2207-2-CF | NICKEL 200         | 0.092   | 15 AMPS        |

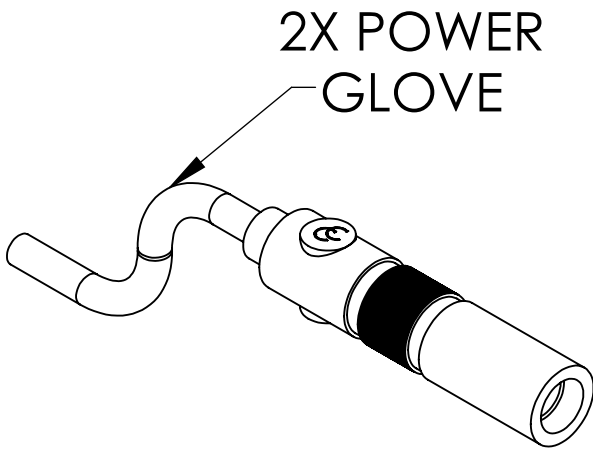

- NOTE:
- VOLTAGE: 5,000 VOLTS DC
  - CURRENT: SEE TABLE
  - TEMPERATURE RATING: -100 TO 450°C

Power Feedthrough W/ Power Gloves, 5,000 Volts, 2 Pins, 2.75" Conflat Flange, UHV Rated, Bakeable to 450°C

|                                      |  |  |      |
|--------------------------------------|--|--|------|
| UNLESS OTHERWISE SPECIFIED:          |  | QUOTATION #  |      |
| DIMENSIONS ARE IN INCHES TOLERANCES: |  | N/A  |      |
| ANGULAR: MACH ± 1/2°                 |  | DRAWN  | NAME |
| TWO PLACE DECIMAL ± .030             |  | CHECKED  | DATE |
| THREE PLACE DECIMAL ± .015           |  | ENG APPR.  | WJ   |
| MATERIAL                             |  | THIRD ANGLE:   |      |
| FINISH                               |  | APPLICATION  |      |
| PLATING                              |  | NEXT ASSY  |      |
|                                      |  | USED ON  |      |
|                                      |  | SURFACE FINISH:  |      |
|                                      |  | UNLESS OTHERWISE SPECIFIED:  |      |
|                                      |  | ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES |      |
|                                      |  | TITLE:   |      |
|                                      |  | POWER GLOVES, 5000 VOLTS, 2 PINS, 2.75" CONFLAT FLANGE                 |      |
|                                      |  | DWG. NO.   |      |
|                                      |  | A2207  |      |
|                                      |  | REV  |      |
|                                      |  | Tuesday, January 22, 2019 11:33:42 AM                                  |      |