


MPF PRODUCTS INC.

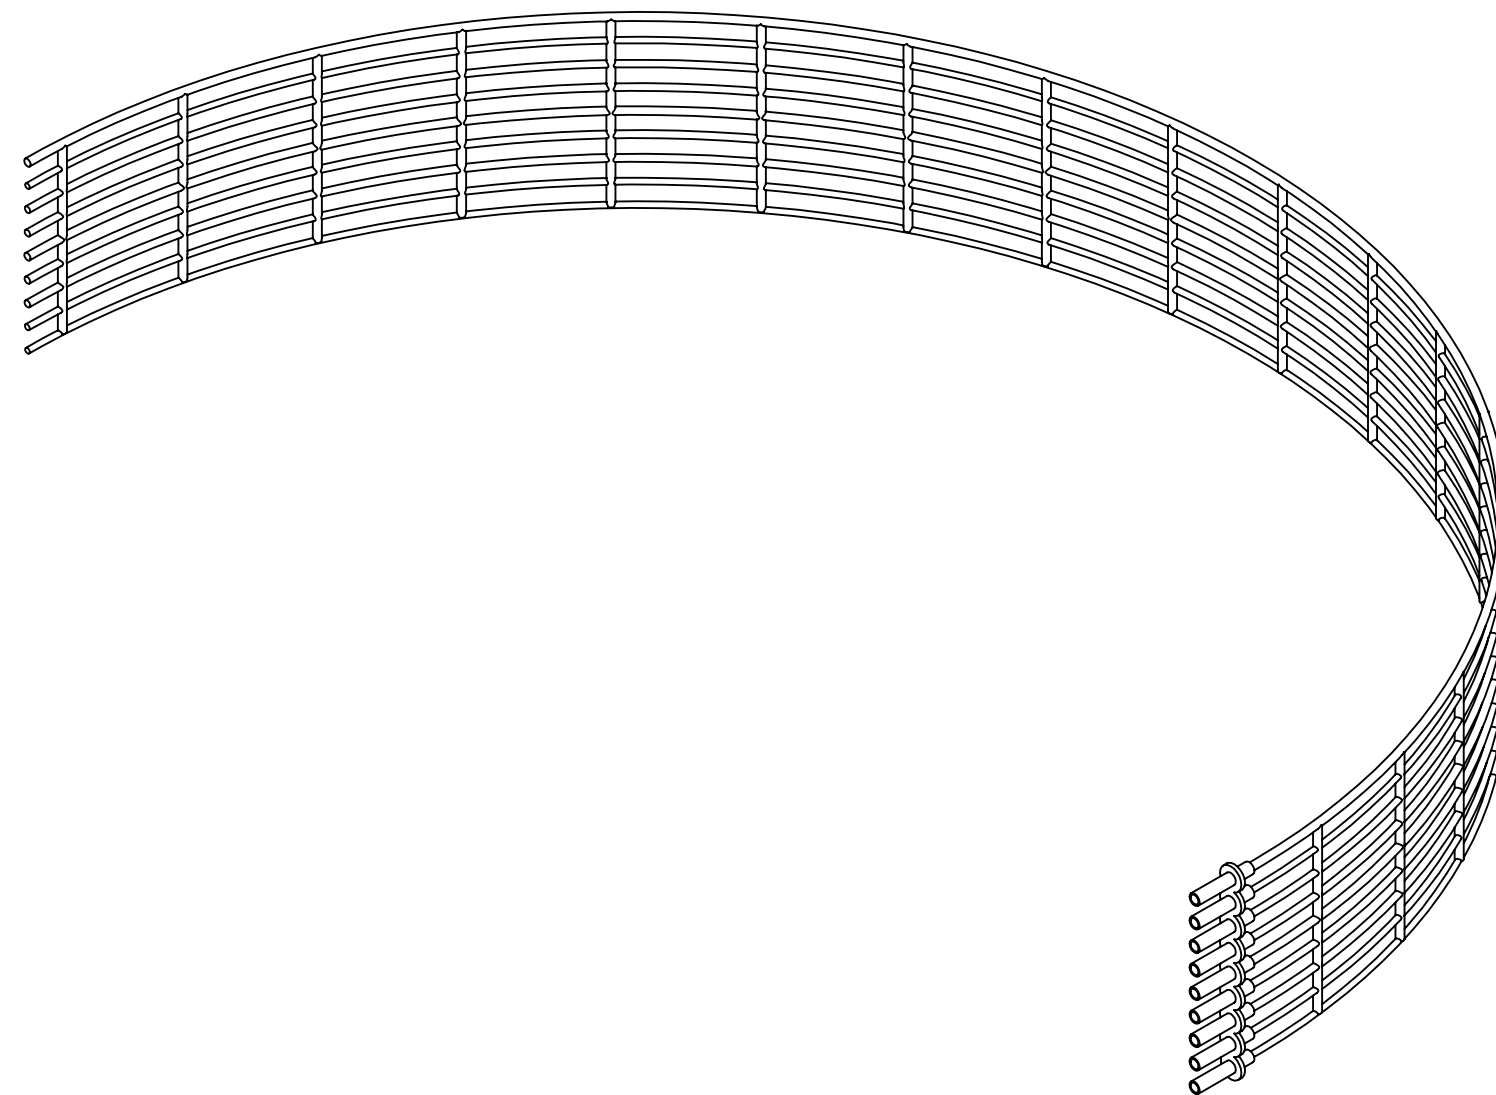

SPECIFICATIONS:

1. OPERATING TEMPERATURE: 250 °C
2. MULTICONDUCTOR RIBBON CABLE, 28 AWG
3. MULTI-STRAND CORE
4. 2 AMPS PER CONDUCTOR
5. VOLTAGE RATING: 600VAC, 2kVDC
6. 244.0 Ohms/km @ 20 °C MAX
7. NUMBER OF WIRES: 9
8. CABLE WIDTH: 0.41
9. CABLE THICKNESS: 0.05
10. INSULATION DIAMETER: .032
11. WIRE DIAMETER: 7 X 0.005
12. MINIMUM BEND RADIUS: 0.53

Subminiature D-type Contact/Cable, 9 Pins, In-Vacuum, Peek Connector w/ Kapton Wire, 19" Length, Female Pins

UNLESS OTHERWISE SPECIFIED:		QUOTATION #		N/A	
DIMENSIONS ARE IN INCHES TOLERANCES:		NAME	DATE	MPF PRODUCTS INC. TITLE: CONTACT-CABLE, TYPE-D, IN-VACUUM, 9 PINS, FEMALE, 19"	
ANGULAR: MACH ± 1/2°		DRAWN	9/11/2015		
TWO PLACE DECIMAL ± .030		CHECKED	9/11/2015		
THREE PLACE DECIMAL ± .015		ENG APPR.	9/11/2015		
MATERIAL		THIRD ANGLE:		DOWNLOAD FROM MPFPI.COM DWG. NO. A2356-1-WR REV	
		APPLICATION NEXT ASSY USED ON			
FINISH		SURFACE FINISH: $\sqrt{32}$ OR BETTER		DWG. NO. A2356-1-WR REV	
PLATING		UNLESS OTHERWISE SPECIFIED: ALL DIAMETERS CONCENTRIC WITHIN .005. REMOVE ALL BURRS AND SHARP EDGES		Wednesday, February 13, 2019 1:14:10 PM	